



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY





# Manual

## iBASE

### IB953

3,5" Industrial Single-Board Computer with 11th Generation

Intel® Core™ i / Celeron® Tiger Lake Processor

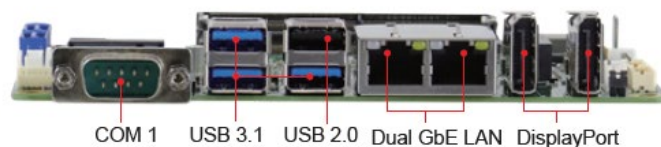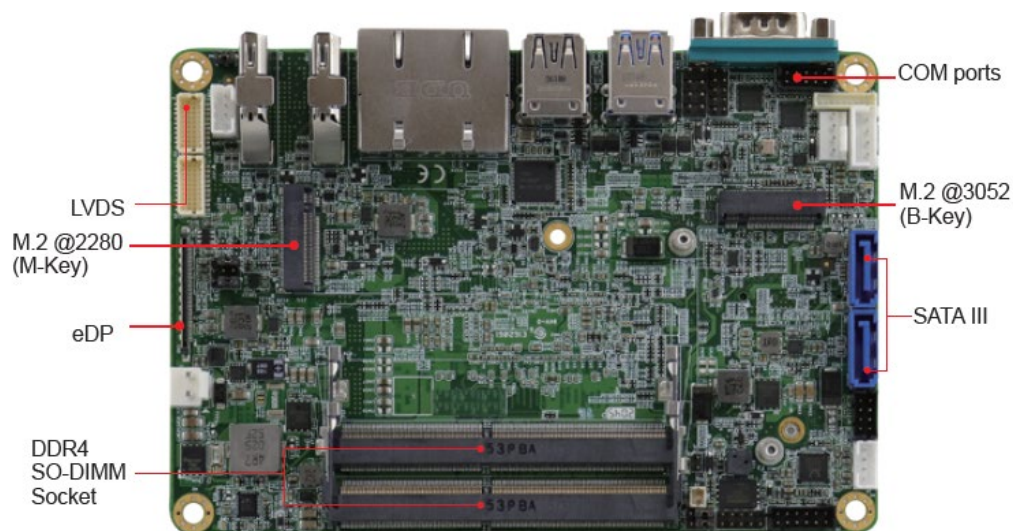

---

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# **IB953 Series**

**11th Generation Intel®  
Core™ i7/i5/i3/ Celeron®  
3.5" Disk-Size SBC**

## **User's Manual**

Version 1.0B  
(August 2021)

## **Copyright**

© 2021 IBASE Technology, Inc. All rights reserved.

No part of this publication may be reproduced, copied, stored in a retrieval system, translated into any language or transmitted in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written consent of IBASE Technology, Inc. (hereinafter referred to as “IBASE”).

## **Disclaimer**

IBASE reserves the right to make changes and improvements to the products described in this document without prior notice. Every effort has been made to ensure the information in the document is correct; however, IBASE does not guarantee this document is error-free.

IBASE assumes no liability for incidental or consequential damages arising from misapplication or inability to use the product or the information contained herein, nor for any infringements of rights of third parties, which may result from its use.

## **Trademarks**

All the trademarks, registrations and brands mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

## Compliance



This product has passed CE Class B tests for environmental specifications and limits. This product is in accordance with the directives of the European Union (EU). In a domestic environment, this product may cause radio interference in which case users may be required to take adequate measures.



This product has been tested and found to comply with the limits for a Class B device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with manufacturer's instructions, may cause harmful interference to radio communications.

### WEEE



This product must not be disposed of as normal household waste, in accordance with the EU directive of for waste electrical and electronic equipment (WEEE - 2012/19/EU). Instead, it should be disposed of by returning it to a municipal recycling collection point. Check local regulations for disposal of electronic products.

### Green IBASE



This product is compliant with the current RoHS restrictions and prohibits use of the following substances in concentrations exceeding 0.1% by weight (1000 ppm) except for cadmium, limited to 0.01% by weight (100 ppm).

- Lead (Pb)
- Mercury (Hg)
- Cadmium (Cd)
- Hexavalent chromium (Cr6+)
- Polybrominated biphenyls (PBB)
- Polybrominated diphenyl ether (PBDE)

## Important Safety Information

### Environmental conditions:

- Use this product in environments with ambient temperatures between 0°C and 60°C.
- Do not leave this product in an environment where the storage temperature may be below -20° C or above 80° C. To prevent from damages, the product must be used in a controlled environment.

### Care for your iBASE products:

- Before cleaning the PCB, unplug all cables and remove the battery.
- Clean the PCB with a circuit board cleaner or degreaser, or use cotton swabs and alcohol.
- Vacuum the dust with a computer vacuum cleaner to prevent the fan from being clogged.



### WARNING

### Attention during use:

- Do not use this product near water.
- Do not spill water or any other liquids on this product.
- Do not place heavy objects on the top of this product.

### Anti-static precautions

- Wear an anti-static wrist strap to avoid electrostatic discharge.
- Place the PCB on an anti-static kit or mat.
- Hold the edges of PCB when handling.
- Touch the edges of non-metallic components of the product instead of the surface of the PCB.
- Ground yourself by touching a grounded conductor or a grounded bit of metal frequently to discharge any static.



### CAUTION

There is danger of explosion if the internal lithium-ion battery is replaced by an incorrect type. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions or recycle them at a local recycling facility or battery collection point.

## Warranty Policy

- **IBASE standard products:**

24-month (2-year) warranty from the date of shipment. If the date of shipment cannot be ascertained, the product serial numbers can be used to determine the approximate shipping date.

- **3<sup>rd</sup>-party parts:**

12-month (1-year) warranty from delivery for the 3<sup>rd</sup>-party parts that are not manufactured by IBASE, such as CPU, CPU cooler, memory, storage devices, power adapter, panel and touchscreen.

- \* PRODUCTS, HOWEVER, THAT FAIL DUE TO MISUSE, ACCIDENT, IMPROPER INSTALLATION OR UNAUTHORIZED REPAIR SHALL BE TREATED AS OUT OF WARRANTY AND CUSTOMERS SHALL BE BILLED FOR REPAIR AND SHIPPING CHARGES.

## Technical Support & Services

1. Visit the IBASE website at [www.ibase.com.tw](http://www.ibase.com.tw) to find the latest information about the product.
2. If you need any further assistance from your distributor or sales representative, prepare the following information of your product and elaborate upon the problem.
  - Product model name
  - Product serial number
  - Detailed description of the problem
  - The error messages in text or in screenshots if there is any
  - The arrangement of the peripherals
  - Software in use (such as OS and application software, including the version numbers)
3. If repair service is required, you can download the RMA form at <http://www.ibase.com.tw/english/Supports/RMAService/>. Fill out the form and contact your distributor or sales representative.

# Table of Contents

---

<b>Chapter 1</b>	<b>General Information .....</b>	<b>1</b>
1.1	Introduction .....	2
1.2	Features .....	2
1.3	Packing List .....	3
1.4	Optional Accessories .....	3
1.5	Specifications .....	4
1.6	Block Diagram .....	6
1.7	Board Pictures .....	7
1.8	Dimensions .....	9
<b>Chapter 2</b>	<b>Hardware Configuration .....</b>	<b>11</b>
2.1	Essential Installations .....	12
2.1.1	Installing the Memory .....	12
2.2	Setting the Jumpers .....	13
2.3	Jumper & Connector Locations .....	14
2.4	Jumpers Quick Reference .....	15
2.4.1	Clear RTC Data (JP1) .....	15
2.4.2	Clear CMOS Data (JP2) .....	16
2.4.3	eDP Power Selection (JP4) .....	16
2.4.4	AT / ATX Selection (JP6) .....	17
2.4.5	LVDS Panel Power / Brightness Selections (JP5 / JP7) .....	17
2.5	Connectors Quick Reference .....	18
2.5.1	SATA Connectors (CN1, CN3) .....	19
2.5.2	eDP Connector (CN2) .....	20
2.5.3	COM1 Serial Port (CN4) .....	21
2.5.4	DP Connectors (CN8, CN9) .....	22
2.5.5	Audio Connector (J2) .....	23
2.5.6	Audio AMP Connector (J4) .....	23
2.5.7	USB2 #5 #6 (J6) .....	24
2.5.8	DC-In Connector (J7) .....	24
2.5.9	LVDS CHB Connector (J12 - 2nd, J14 - 1st) .....	25
2.5.10	SATA Power Connector (J13) .....	26
2.5.11	LVDS Backlight Connector (J15) .....	26
2.5.12	Digital I/O Connector (J17) .....	27
2.5.13	Front Panel Setting Connector (J18) .....	28
2.5.14	COM2 Serial Ports (J19) .....	29
2.5.15	CPU Fan Power Connector (CPU_FAN1) .....	30



<b>Chapter 3</b>	<b>Drivers Installation .....</b>	<b>31</b>
3.1	Introduction .....	32
3.2	Intel® Chipset Software Installation Utility .....	32
3.3	VGA Driver Installation .....	34
3.4	HD Audio Driver Installation .....	35
3.5	LAN Driver Installation .....	36
3.6	Intel® Management Engine Drivers Installation .....	38
3.7	Intel® Thunderbolt Drivers Installation .....	40
<b>Chapter 4</b>	<b>BIOS Setup .....</b>	<b>43</b>
4.1	Introduction .....	44
4.2	BIOS Setup .....	44
4.3	Main Settings .....	45
4.4	Advanced Settings .....	46
4.5	Chipset Settings .....	61
4.6	Security Settings .....	65
4.7	Boot Settings .....	66
4.8	Save & Exit Settings .....	67
<b>Appendix</b>	<b>.....</b>	<b>69</b>
A.	I/O Port Address Map .....	70
B.	Interrupt Request Lines (IRQ) .....	72
C.	Watchdog Timer Configuration .....	73
D.	Onboard Connector Reference Types .....	77

This page is intentionally left blank.

# Chapter 1

## General Information

The information provided in this chapter includes:

- Features
- Packing List
- Optional Accessories
- Specifications
- Block Diagram
- Board Pictures
- Board Dimensions

## 1.1 Introduction

- IB953 series is a 3.5" disk-size single board computer based on the platform of 11th Gen Intel® Core™ i7/i5/i3/ Celeron® processor. It features two DDR4-3200 SO-DIMM sockets with 64GB capacity and interface for two DisplayPort, eDP and 24-bit dual-channel LVDS. Fast connection is provided by two USB 2.0, three USB 3.1, two SATA III, and two Gigabit Ethernet.

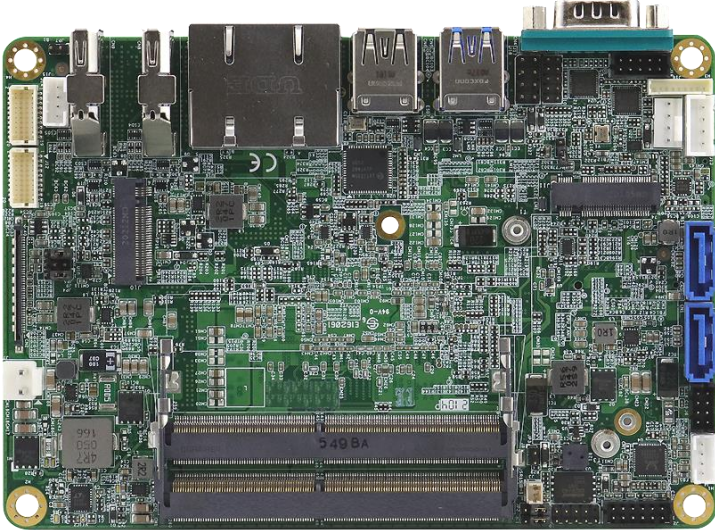


Photo of IB953

## 1.2 Features

- Onboard 11th Gen Intel® Core™ i7/i5/i3/ Celeron® processor
- 2x DDR4-3200 SO-DIMM, Max.64GB
- 2x DisplayPort, eDP and 24-bit dual-channel LVDS
- 2x Intel® PCI-E GbE LAN
- 3x USB 2.0, 3x USB 3.1, 2x SATA III
- 3x M.2 sockets (B-Key/ E-Key and M-Key)
- Watchdog timer, Digital I/O, TPM (2.0), 5G compatible

### 1.3 Packing List


Your IB953 package should include the items listed below. If any of the items below is missing, contact the distributor or dealer from whom you purchased the product.

- IB953 SBC x 1
- Disk  
(including chipset drivers and flash memory utility) x 1
- This User's Manual x 1

### 1.4 Optional Accessories

IBASE provides the following optional accessories:

- Cable Kit (IB76A-2)
  - Including:
  - DC-In power cable (PW87) x 1
  - COM ports cable (PK1H) x 1
  - SATA & HDD power cable (SATA-53A) x 1
  - USB 2.0 cable (USB29) x 1
- Audio cable (Audio-18)
- M.2 (B-KEY) Bracket 3042 to 3052
- Heat spreader (HSIB953-1)
- Heat sink (HSIB953-A)

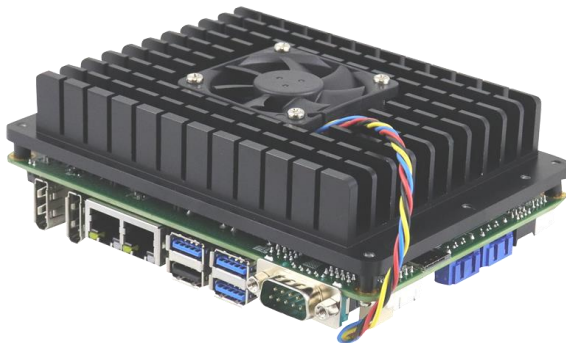


## 1.5 Specifications

Product Name	IB953AF-i7	IB953AF-i5	IB953EF-i3	IB953EF-CEL
CPU	Intel Core i7-1185G7E	Intel Core i5-1145G7E	Intel Core i3-1115G4E	Intel Celeron 6305E
CPU Speed	1.8~4.4GHz	1.5~4.10GHz	2.2~ 3.9GHz	1.8GHz
Smart Cache	12MB	8MB	6MB	4MB
System				
Form Factor	3.5" disk-size SBC			
Operating System	<ul style="list-style-type: none"> <li>Windows 10</li> <li>Linux Ubuntu / Fedora</li> </ul>			
Chipset	Integrated in Intel® processor			
Memory	2 x DDR4-3200 SO-DIMM, Max. 64GB			
Storage	1x M.2 (M-Key)			
Graphics	Intel® Gen 12 Graphics			
Network	IB953AF series: Intel® I219LM Gigabit LAN PHY IB953EF series: Intel® I219V Gigabit LAN PHY Intel® I211AT PCI-E Gigabit LAN (as 2nd LAN)			
Super I/O	Fintek F81804U-I-I			
Audio Codec & Controller	Built-in HD with Realtek ALC269 w/ class-D amplifier			
Power Requirement	12V ~ 24V DC-In (+/- 10%)			
TPM	2.0			
Watchdog Timer	Yes (256 segments, 0, 1, 2...255 sec / min)			
BIOS	AMI BIOS			
H/W Monitor	Yes			
Dimensions	102.22 x 147.01 mm (4.02" x 5.8")			
RoHS	Yes			
Certification	CE, FCC Class B			

<b>I/O Ports</b>	
<b>Display</b>	2x DisplayPort, eDP and 24-bit dual-channel LVDS
<b>LAN</b>	2 x RJ45 GbE LAN
<b>USB</b>	<ul style="list-style-type: none"> <li>• 2x USB2.0 (Pin-header), 1x USB2.0 (Type-A)</li> <li>• 3x USB3.1 (Gen.2) (Type-A)</li> </ul>
<b>Serial</b>	2x RS232/422/485 (Jumper-less selection)
<b>SATA</b>	2 x SATA III
<b>Audio</b>	Built-in HD audio with Realtek ALC269 w/ class-D amplifier
<b>Digital IO</b>	4-In & 4-Out
<b>Expansion Slots</b>	<ul style="list-style-type: none"> <li>• 1x M.2 (M-Key, Type:2280, Supports NVMe)</li> <li>• 1x M.2 (E-Key, Type:2230, Supports CNVi)</li> <li>• 1x M.2 (B-Key, Type:3052, Supports 5G)</li> </ul>
<b>Environment</b>	
<b>Temperature</b>	<ul style="list-style-type: none"> <li>• Operation: 0 ~ 60 °C (32 ~ 140 °F)</li> <li>• Storage: -20 ~ 80 °C (-4 ~ 176 °F)</li> </ul>
<b>Relative Humidity</b>	0 ~ 90 %, non-condensing at 60 °C

All specifications are subject to change without prior notice.


## 1.6 Block Diagram

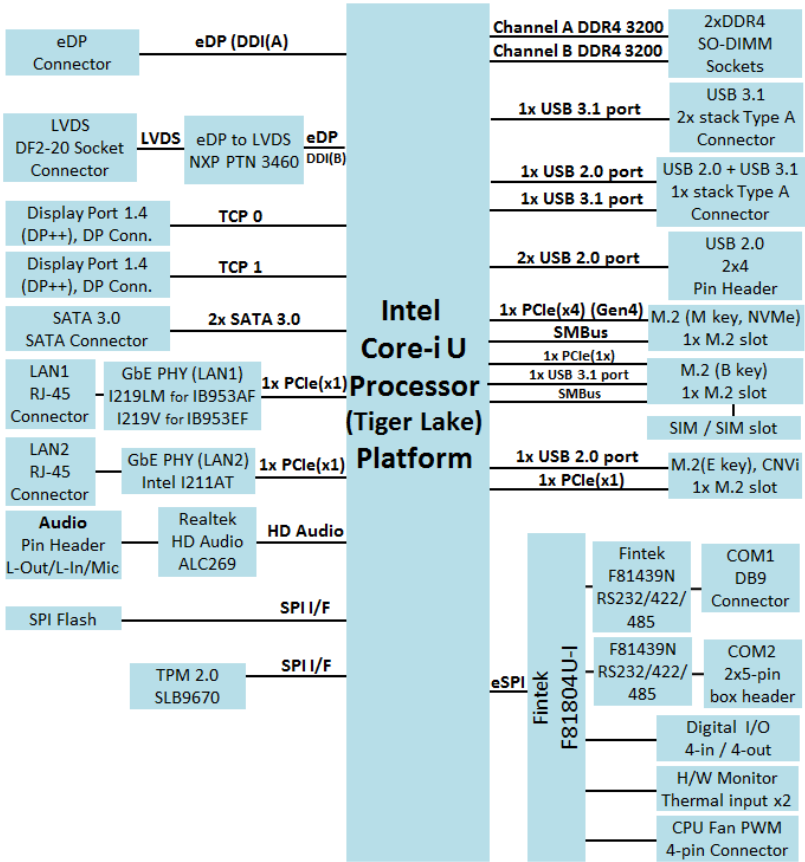




## 1.7 Board Pictures


### Top View

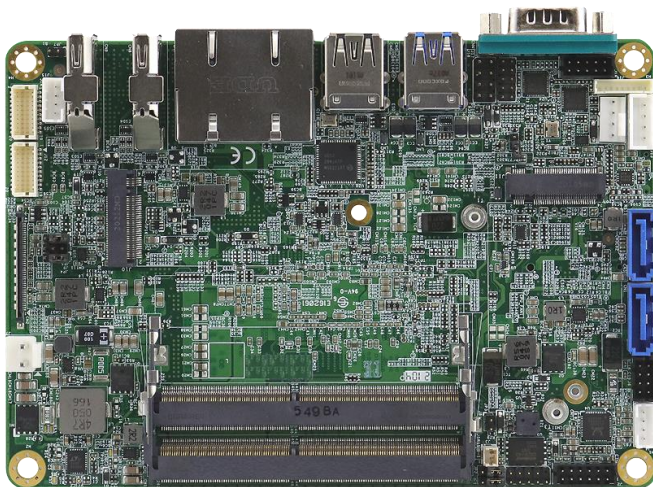

### Bottom View

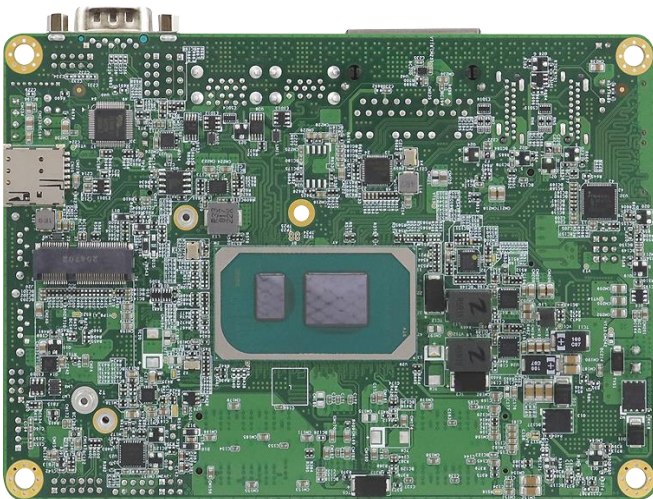


\* The photos above are for reference only. Some minor components may differ.

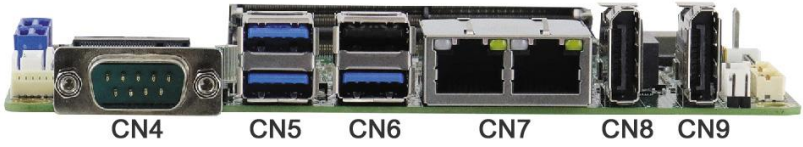**I/O View**

Connector	Function
CN4	COM1 Port
CN5	USB 3.1 #1, #2
CN6	USB 3.1 #3, USB 2.0 #4
CN7	LAN Ports
CN8	DP++
CN9	DP++

## 1.8 Dimensions

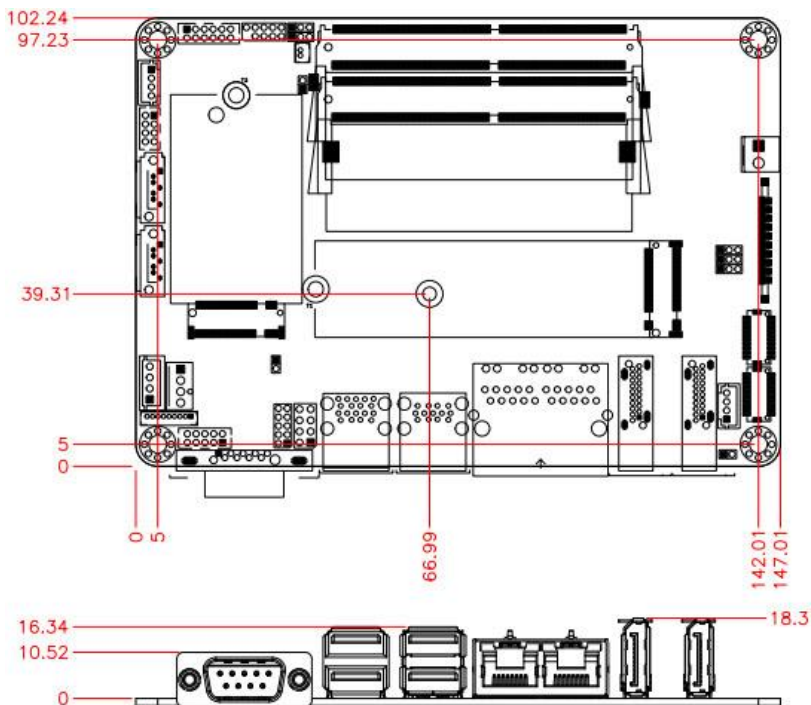

This page is intentionally left blank.

# Chapter 2

## Hardware Configuration


This section provides information on jumper settings and connectors on the IB953 in order to set up a workable system. On top of that, you will also need to install crucial pieces such as the CPU and the memory before using the product. The topics covered are:

- Essential installations before you begin
- Jumper and connector locations
- Jumper settings and information of connectors

## 2.1 Essential Installations

### 2.1.1 Installing the Memory

The IB953 series supports two DDR4 memory sockets. To install the modules, locate the memory slot on the board and perform the following steps:

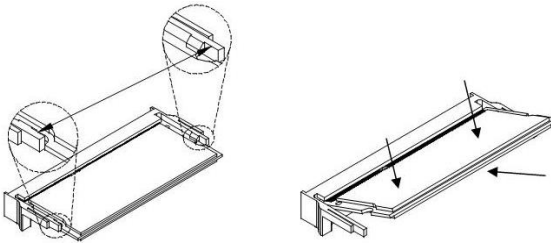

1. Align the key of the memory module with that on the memory slot and insert the module slantwise.
2. Gently push the module in an upright position until the clips of the slot close to hold the module in place when the module touches the bottom of the slot.


To remove the module, press the clips outwards with both hands, and the module will pop-up.

## 2.2 Setting the Jumpers


Set up and configure your IB953 by using jumpers for various settings and features according to your needs and applications. Contact your supplier if you have doubts about the best configuration for your use.

### 2.2.1 How to Set Jumpers

Jumpers are short-length conductors consisting of several metal pins with a non-conductive base mounted on the circuit board. Jumper caps are used to have the functions and features enabled or disabled. If a jumper has 3 pins, you can connect either PIN1 to PIN2 or PIN2 to PIN3 by shorting.



A 3-pin jumper



A jumper cap


Refer to the illustration below to set jumpers.

Pin closed	Jumper	Setting
Open		
1-2		
2-3		

When two pins of a jumper are encased in a jumper cap, this jumper is **closed**, i.e. turned **On**.

When a jumper cap is removed from two jumper pins, this jumper is **open**, i.e. turned **Off**.

## 2.3 Jumper & Connector Locations

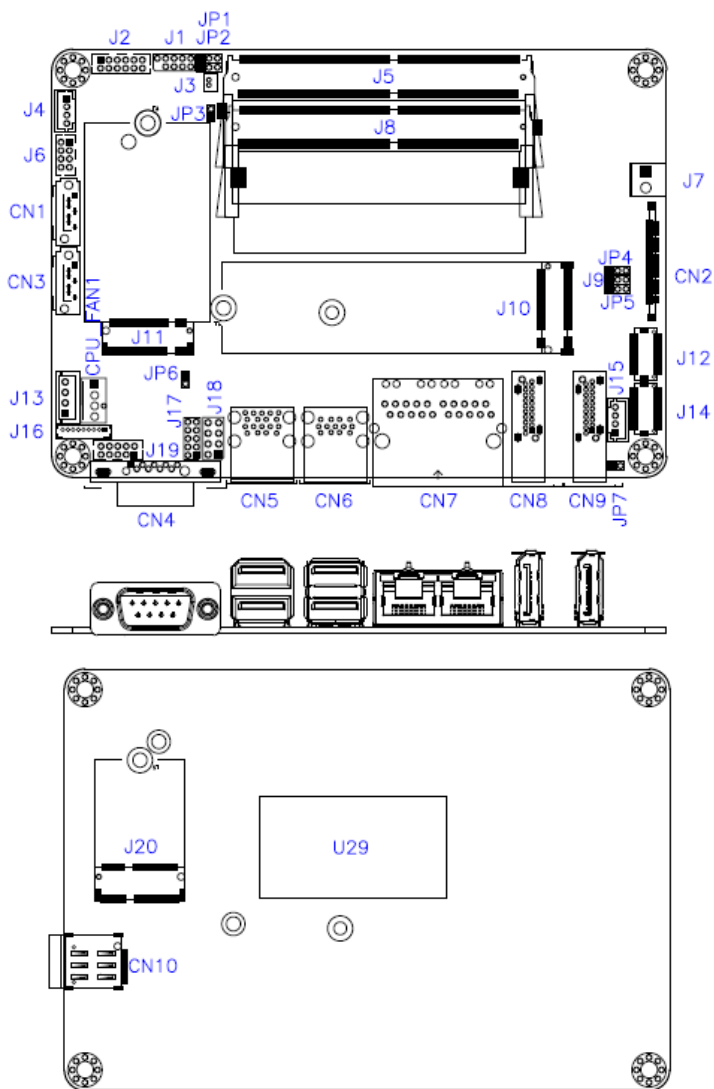


Board diagram of IB953



## 2.4 Jumpers Quick Reference


Function	Jumper Name	Page
Clear RTC Data	JP1	15
Clear CMOS Data	JP2	16
eDP Power Selection	JP4	16
LVDS Power Selection	JP5	17
AT/ATX Selection	JP6	17
LVDS Panel Power / Brightness Selections	JP5 (For power) JP7 (For brightness)	18

### 2.4.1 Clear RTC Data (JP1)

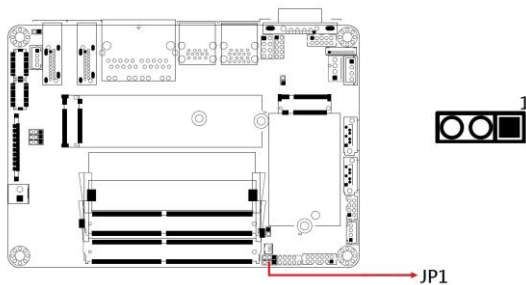


Function	Pin closed	Setting
Normal (default)	1-2	1
Clear RTC	2-3	1

## 2.4.2 Clear CMOS Data (JP2)

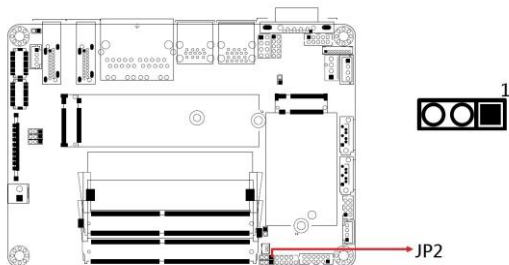


Function	Pin closed	Setting
Normal (default)	1-2	1
Clear CMOS	2-3	1

## 2.4.3 eDP Power Selection (JP4)

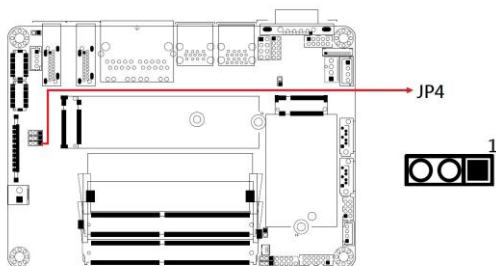


Function	Pin closed	Setting
3.3V (default)	1-2	1
5V	2-3	1

### 2.4.4 AT / ATX Selection (JP6)

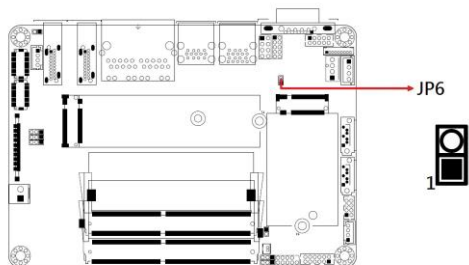

Function	Pin closed	Setting
ATX	Open	1 <input type="checkbox"/> ○
AT	Close	1 <input checked="" type="checkbox"/> ●

### 2.4.5 LVDS Panel Power / Brightness Selections (JP5 / JP7)

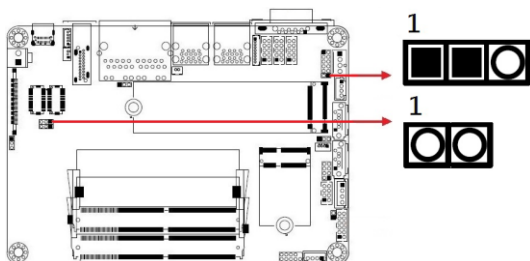


Jumper	Function	Pin closed	Setting
JP5	3.3V (default)	1-2	1 <input checked="" type="checkbox"/> ● ○
	5V	2-3	1 <input type="checkbox"/> ● <input checked="" type="checkbox"/> ●
JP7	3.3V (default)	Open	1 <input type="checkbox"/> ○
	5V	Close	1 <input checked="" type="checkbox"/> ●

## 2.5 Connectors Quick Reference


Function	Connector	Page
SPI Flash Connector (factory use only)	J1	
Battery Connector	J3	
DDR4 UDIMM CH-A	J5	
DDR4 UDIMM CH-B	J8	
M.2 M-Key 2280	J10	
M.2 B-Key 3052	J11	
LVDS CH-B	J12	
eSPI Debug (Factory use only)	J16	
M.2 E-Key with CNVi	J20	
SIM Socket	CN10	
SATA Connectors	CN1, CN3	19
eDP Connector	CN2	20
COM1 Serial Port	CN4	21
DP Connectors	CN8, CN9	22
Audio Connector	J2	23
Audio AMP Connector	J4	23
USB2 #5 #6	J6	24
DC-In Connector	J7	24
LVDS CHB Connector (1st, 2nd)	J14, J12	25
SATA Power Connector	J13	26
LVDS Backlight Connector	J15	26
Digital I/O Connector	J17	27
Front Panel Setting Connector	J18	28
COM2 Serial Ports	J19	29
CPU Fan Power Connector	CPU_FAN1	30

### 2.5.1 SATA Connectors (CN1, CN3)

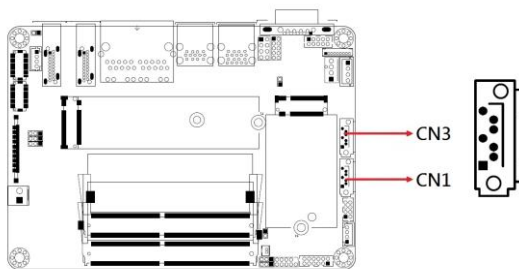

Pin	Assignment	Pin	Assignment
1	Ground	5	RX-
2	TX+	6	RX+
3	TX-	7	Ground
4	Ground		


## 2.5.2 eDP Connector (CN2)

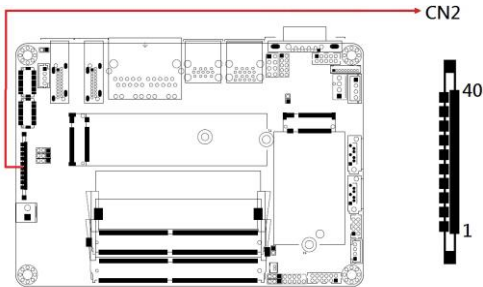

Remarks: KEL\_SSL00-40S


Pin	Assignment	Pin	Assignment
1	eDP Vcc	21	TXN0
2	eDP Vcc	22	TXP1
3	eDP Vcc	23	Ground
4	eDP Vcc	24	AUXP
5	eDP Vcc	25	AUXN
6	Ground	26	NC
7	Ground	27	+3.3V
8	Ground	28	EDP BKLT (+12V)
9	Ground	29	NC
10	Hot Plug detect	30	Ground
11	Ground	31	+5V
12	TXN3	32	NC
13	TXP3	33	Back Light Control
14	Ground	34	Back Light Enable
15	TXN2	35	EDP BKLT (+12V)
16	TXP2	36	+3.3V
17	Ground	37	Ground
18	TXN1	38	NC
19	TXP1	39	NC
20	Ground	40	NC

### 2.5.3 COM1 Serial Port (CN4)

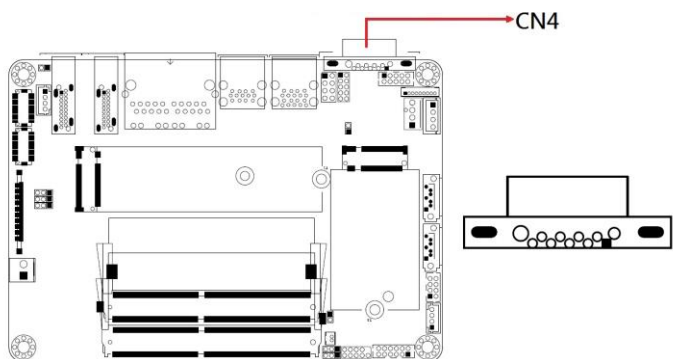

Pin	Assignment		
	RS-232	RS-422	RS-485
1	DCD	TX-	DATA-
2	RX	TX+	DATA+
3	TX	RX+	NC
4	DTR	RX-	NC
5	Ground	Ground	Ground
6	DSR	NC	NC
7	RTS	NC	NC
8	CTS	NC	NC
9	RI	NC	NC
10	NC	NC	NC


## 2.5.4 DP Connectors (CN8, CN9)

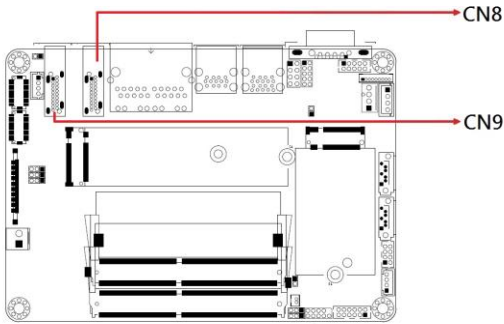

Pin	Assignment	Pin	Assignment
1	LAN0_P	11	GND
2	GND	12	LAN3_N
3	LAN0_N	13	CONFIG
4	LAN1_P	14	GND
5	GND	15	AUXP
6	LAN1_N	16	GND
7	LAN2_P	17	AUXN
8	GND	18	Hot Plug
9	LAN2_N	19	GND
10	LAN3_P	20	+5V




### 2.5.5 Audio Connector (J2)

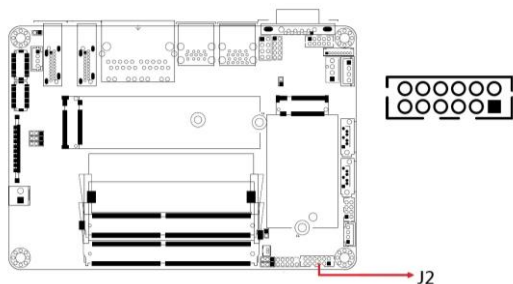

Remarks: HK\_DF11-12S-PA66H

Pin	Assignment	Pin	Assignment
1	LINE OUT_L	2	LINE OUT_R
3	FRONT_JD	4	GND
5	LINE IN_L	6	LINE IN_R
7	LINE_JD	8	GND
9	MIC_L	10	MIC_R
11	MIC_JD	12	GND


### 2.5.6 Audio AMP Connector (J2/J4)

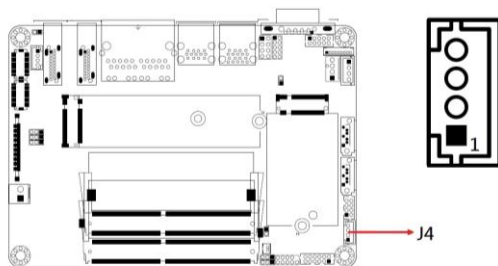

Remarks: E-CALL\_0110-161-040

Pin	Assignment
1	SPK_L+
2	SPK_L-
3	SPK_R-
4	SPK_R+


### 2.5.7 USB2 #5 #6 (J6)

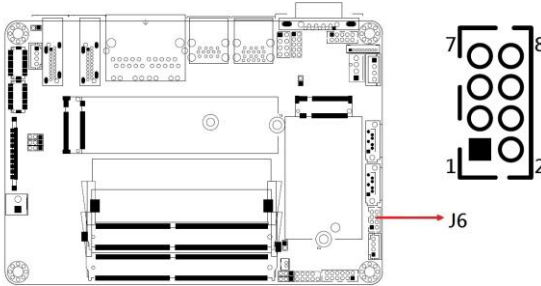

Remarks: HK\_DF11-8S-PA66H


Pin	Assignment	Pin	Assignment
1	+5V	2	GND
3	USB_PN	4	USB_PP
5	USB_PP	6	USB_PN
7	GND	8	+5V

### 2.5.8 DC-In Connector (J7)

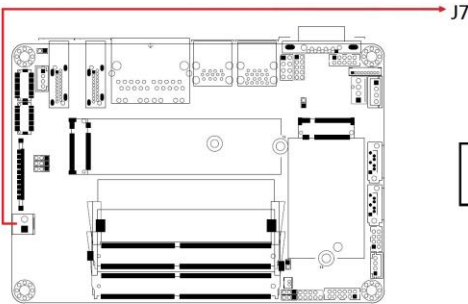

Pin	Assignment
1	+12 ~ +24V
2	Ground


## 2.5.9 LVDS CHB Connector (J12 - 2nd, J14 - 1st)

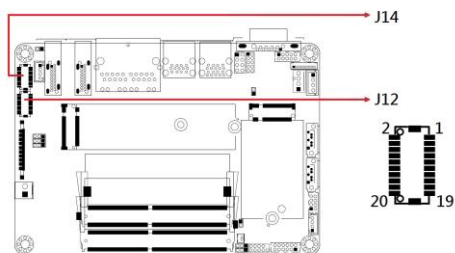

Remarks: HIROSE\_DF20G-20DP-1V(56)

Pin	Assignment	Pin	Assignment
1	TX0P	2	TX0N
3	GND	4	GND
5	TX1P	6	TX1N
7	GND	8	GND
9	TX2P	10	TX2N
11	GND	12	GND
13	CLKP	14	CLKN
15	GND	16	GND
17	TX3P	18	TX3N
19	+3.3V	20	+3.3V


### 2.5.10 SATA Power Connector (J13)

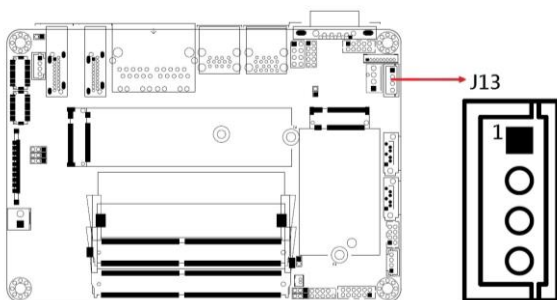

Remarks: E-CALL\_0110-071-040

Pin	Assignment
1	+5V
2	GND
3	GND
4	+12V


### 2.5.11 LVDS Backlight Connector (J15)

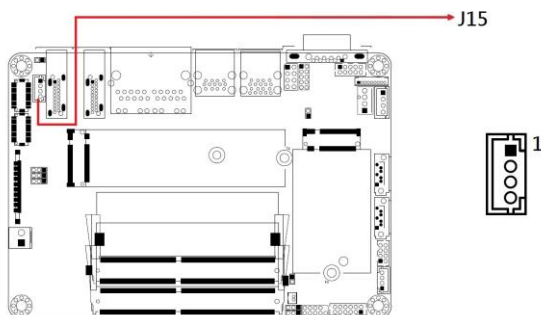

Remarks: E-CALL\_0110-161-040

Pin	Assignment
1	+12V
2	Backlight Enable
3	Brightness Control
4	Ground

### 2.5.12 Digital I/O Connector (J17)

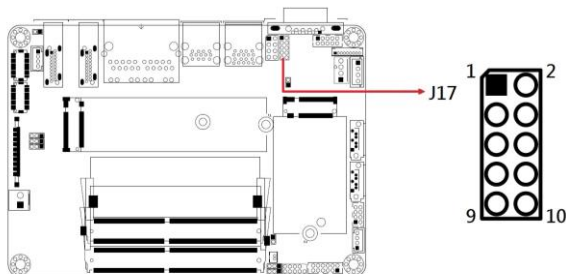


\* 4 in, 4 out

Remarks: E-CALL\_0196-01-200-100

Pin	Assignment	Pin	Assignment
1	Ground	2	+5V
3	Out3	4	Out1
5	Out2	6	Out0
7	IN3	8	IN1
9	IN2	10	IN0

### 2.5.13 Front Panel Setting Connector (J18)

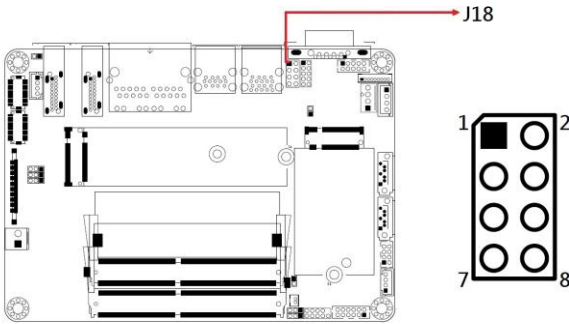

\* E-CALL\_0126-01-203-080

Pin	Assignment	Pin	Assignment
1	Power BTN	2	Power BTN
3	HDD LED+	4	HDD LED-
5	Reset BTN	6	Reset BTN
7	Power LED+	8	Power LED-

This connector is utilized for system indicators to provide light indication of the computer activities and switches to change the computer status. It provides interfaces for the following functions.

- ATX Power ON Switch (Pins 1 and 2)**


The 2 pins makes an “ATX Power Supply On/Off Switch” for the system that connects to the power switch on the case. When pressed, the power switch will force the system to power on. When pressed again, it will power off the system.
- Hard Disk Drive LED Connector (Pins 3 and 4)**

This connector connects to the hard drive activity LED on control panel. This LED will flash when the HDD is being accessed.
- Reset Switch (Pins 5 and 6)**

The reset switch allows you to reset the system without turning the main power switch off and then on again. Orientation is not required when making a connection to this header.
- Power LED: Pins 7 and 8**

This connector connects to the system power LED on control panel. This LED will light when the system turns on.


## 2.5.14 COM2 Serial Ports (J19)

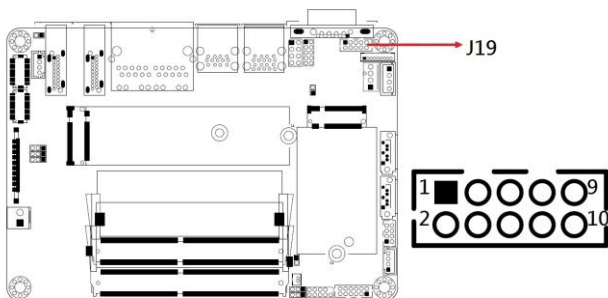

Remarks: HK\_DF11-10S-PA66H

Pin	Assignment		
	RS-232	RS-422	RS-485
1	DCD	TX-	DATA-
2	RX	TX+	DATA+
3	TX	RX+	NC
4	DTR	RX-	NC
5	Ground	Ground	Ground
6	DSR	NC	NC
7	RTS	NC	NC
8	CTS	NC	NC
9	RI	NC	NC
10	NC	NC	NC

## 2.5.15 CPU Fan Power Connector (CPU\_FAN1)

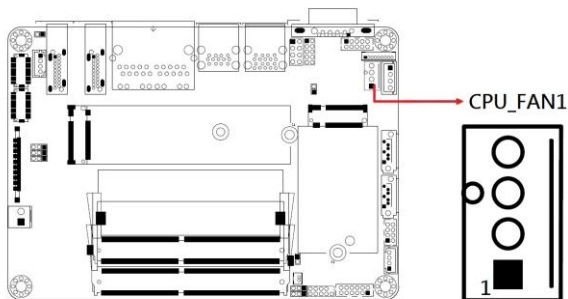

Remarks: PWM only

Pin	Assignment
1	Ground
2	+12V
3	Rotation detection
4	Control



# Chapter 3

## Drivers Installation

This chapter introduces installation of the following drivers:

- Intel® Chipset Software Installation Utility
- VGA Driver
- HD Audio Driver
- LAN Driver
- Intel® Management Engine Drivers Installation
- Intel® Thunderbolt Drivers Installation

## 3.1 Introduction

This section describes the installation procedures for software and drivers. The software and drivers are included with the motherboard. If you find anything missing, please contact the distributor where you made the purchase. The contents of this section include the following:

---

**Note:** After installing your Windows operating system, you must install the Intel® Chipset Software Installation Utility first before proceeding with the drivers installation.

---

## 3.2 Intel® Chipset Software Installation Utility

The Intel® Chipset drivers should be installed first before the software drivers to install INF files for Plug & Play function for Intel chipset components. Follow the instructions below to complete the installation.

1. Insert the drivers disk in the disk drive. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.



2. Click **Intel(R) Chipset Software Installation Utility**.



3. When the *Welcome* screen to the Intel® Chipset Device Software appears, click **Next** to continue.
4. Accept the software license agreement and proceed with the installation process.
5. On the *Readme File Information* screen, click **Install**.
6. After completing the installation, click **Finish** to complete the setup process.

### 3.3 VGA Driver Installation

1. Insert the drivers disk in the disk drive. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.



2. Click **Intel(R) HD Graphics Driver**.



3. When the *Welcome* screen appears, click **Next** to continue.
4. Click **Yes** to accept the license agreement.
5. On the *Readme File Information* screen, click **Next** until the installation starts.
6. When Setup is Complete, click **Finish** to restart the computer for changes to take effect.

### 3.4 HD Audio Driver Installation

1. Insert the drivers disk in the disk drive. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.



2. Click **Realtek High Definition Audio Driver**.



3. On the *Welcome* screen of the InstallShield Wizard, click **Next**.
4. Click **Next** until the installation starts.
5. After the installation, restart the computer for changes to take effect.

### 3.5 LAN Driver Installation


1. Insert the drivers disk in the disk drive. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.




2. Click **Intel(R) PRO LAN Network Drivers..**



3. On the Network Connections screen, click **Install Drivers and Software.**

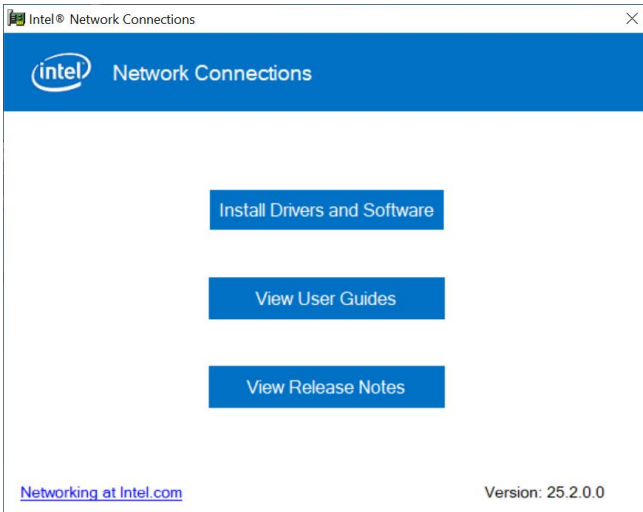

- When the *Welcome to the install wizard for Intel(R) Network Connections* screen appears, click **Next**.

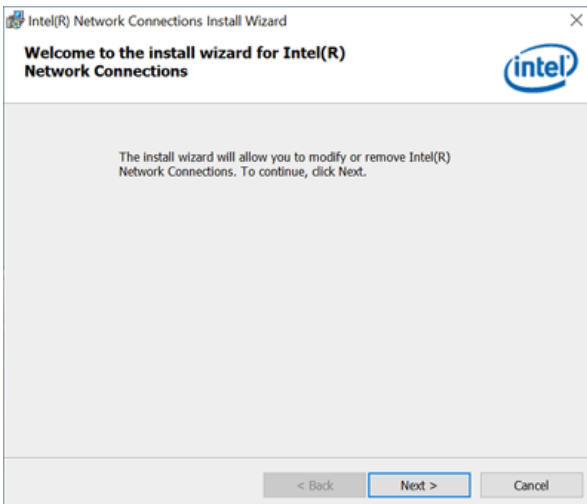

- On the next screen, accept the license agreement and click **Next**.
- On the *Setup Options* screen, click the checkbox to select the desired driver(s) for installation. Then click **Next** to continue.
- On the *Ready to Install the Program* screen, click **Install** to begin the installation. When the Install wizard has completed, click **Finish**.

### 3.6 Intel® Management Engine Drivers Installation

1. Insert the disk enclosed in the package with the board. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.




1. Click **Intel(R) ME 12.x Drivers**.





2. When the *Welcome* screen appears, click **Next**.
3. Accept the license agreement and click **Next**.
4. When the *Destination Folder* screen appears, click **Next** and the components will be installed.
5. After Intel Management Engine Components have been successfully installed, click **Finish**.

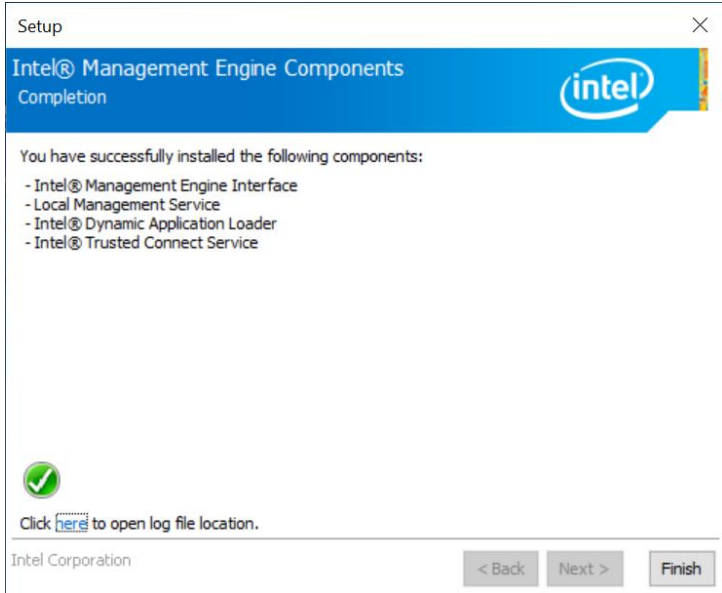

6.

### 3.7 Intel® Thunderbolt Drivers Installation

1. Insert the disk enclosed in the package with the board. Click **Intel** on the left pane and then **Intel(R) TigerLake-U Chipset Drivers** on the right pane.




2. Click **Intel(R) Thunderbolt Drivers**.



3. In the next screen, accept the license agreement and click **Next**.



4. When the drivers have been successfully installed, click **Restart**.

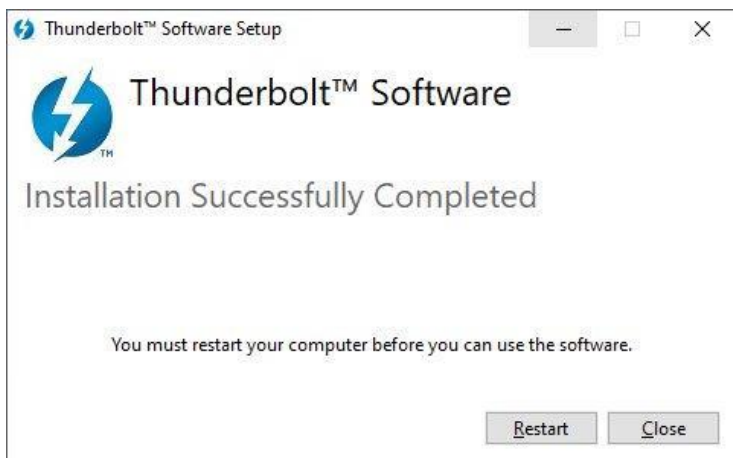

This page is intentionally left blank.

# Chapter 4

## BIOS Setup

This chapter describes the different settings available in the AMI BIOS that comes with the board. The topics covered in this chapter are as follows:

- Main Settings
- Advanced Settings
- Chipset Settings
- Security Settings
- Boot Settings
- Save & Exit

## 4.1 Introduction

The BIOS (Basic Input/Output System) installed in the ROM of your computer system supports Intel® processors. The BIOS provides critical low-level support for standard devices such as disk drives, serial ports and parallel ports. It also provides password protection as well as special support for detailed fine-tuning of the chipset controlling the entire system.

## 4.2 BIOS Setup

The BIOS provides a Setup utility program for specifying the system configurations and settings. The BIOS ROM of the system stores the Setup utility. When you turn on the computer, the BIOS is immediately activated. Press the <Del> key immediately allows you to enter the Setup utility. If you are a little bit late pressing the <Del> key, POST (Power On Self Test) will continue with its test routines, thus preventing you from invoking the Setup.

If you still need to enter Setup, restart the system by pressing the "Reset" button or simultaneously pressing the <Ctrl>, <Alt> and <Delete> keys. You can also restart by turning the system Off and back On again.

The following message will appear on the screen:

```
Press <DEL> to Enter Setup
```

In general, press the arrow keys to highlight items, <Enter> to select, the <PgUp> and <PgDn> keys to change entries, <F1> for help, and <Esc> to quit.

When you enter the BIOS Setup utility, the *Main Menu* screen will appear on the screen. The Main Menu allows you to select from various setup functions and exit choices.

---

**Warning:** It is strongly recommended that you avoid making any changes to the chipset defaults.

These defaults have been carefully chosen by both AMI and your system manufacturer to provide the absolute maximum performance and reliability. Changing the defaults could make the system unstable and crash in some cases.

---

### 4.3 Main Settings




BIOS Setting	Description
System Date	Sets the date. Use the <Tab> key to switch between the data elements.
System Time	Set the time. Use the <Tab> key to switch between the data elements.

**NOTE:** Below is the corresponding screen for the IB953EF BIOS



## 4.4 Advanced Settings

This section allows you to configure system features according to your preference.

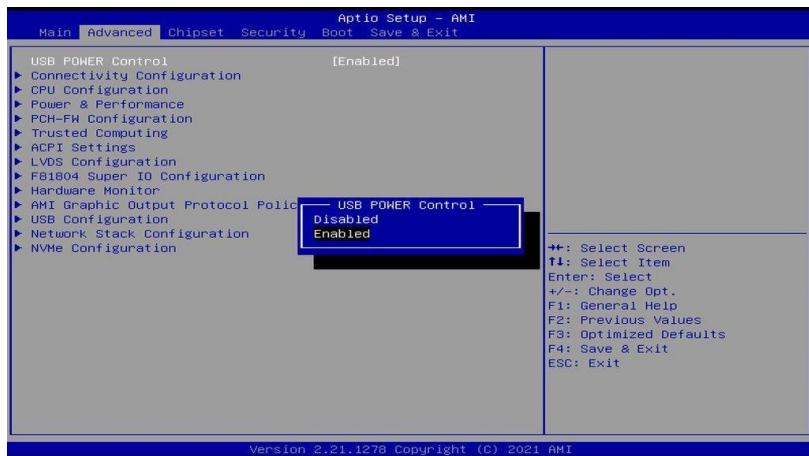



## 4.4.1 Connectivity Configuration



BIOS Setting	Description
CNVi Mode	This option configures Connectivity. <b>Auto Detection</b> – means that if Discrete solution is discovered it will be enabled by default. Otherwise Integrated solution (CNVi) will be enabled; <b>Disable Integrated</b> – disables Integrated Solution.
Preboot BLE	This will be used to enable Preboot Bluetooth function.
Discrete Bluetooth Module	Serial IO UART0 needs to be enabled to select BT Module. Default: Disabled
Advanced Settings	Configure ACPI objects for wireless devices Default: Disabled
WWAN Configuration	Configure WWAN related options. WWAN Device: enable or disable M.2 WWAN device
WWAN Reset Workaround	Default: Enabled

## 4.4.2 CPU Configuration

Advanced		Aptio Setup - AMI	
CPU Configuration		When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.	
Type	Intel(R) Celeron(R) 6...		
ID	0x806C1		
Speed	1800 MHz		
VMX	Supported		
SMX/TXT	Not Supported		
Intel (VMX) Virtualization Technol	[Enabled]		
Active Processor Cores	[Show All Item]		
AES	[Enabled]		


This section displays the type, ID and speed of the CPU.

BIOS Setting	Description
Intel (VMX) Virtualization Technology	When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.
Active Processor Cores	Number of cores to enable in each processor package
Hyper-Threading	Options; Enabled or Disabled
AES	Enable/Disable AES (Advanced Encryption Standard)
Intel Trusted Execution Technology	Enables utilization of additional hardware capabilities provided by Intel® Trusted Execution Technology. Changes require a full power cycle to take effect.

**NOTE: The selection for Hyper-Threading is available on IB953AF-i7, IB953AF-i5 and IB953EF-i3 only (not on IB953EF-CLE).**



Advanced		Aptio Setup - AMI	
CPU Configuration		Enable or Disable Hyper-Threading Technology.	
Type	11th Gen Intel(R) Cor...		
ID	0x806C1		
Speed	2800 MHz		
VMX	Supported		
SMX/TXT	Supported		
Intel (VMX) Virtualization Technol	[Enabled]		
Active Processor Cores	[Show All Item]		
Hyper-Threading	Hyper-Threading		
AES	Disabled		
	Enabled		
		++: Select Screen	

### 4.4.3 Power & Performance

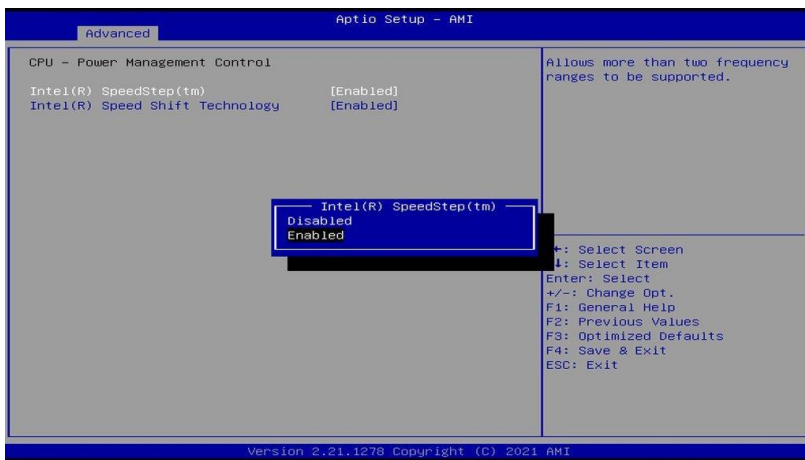

BIOS Setting	Description
Intel Speedstep	Allows more than two frequency ranges to be supported
Intel Speed Shift Technology	Enable/Disable Intel Speed Shift Technology support. Enabling will expose the CPPC v2 interface to allow for hardware controlled P-states.

## 4.4.4 PCH-FW Configuration

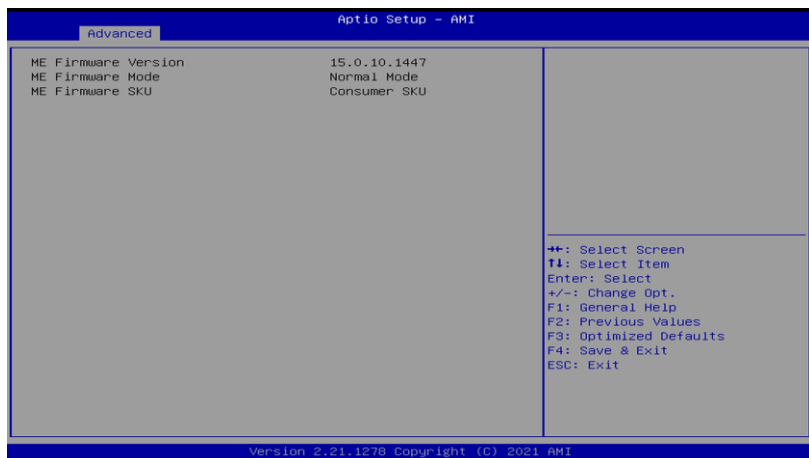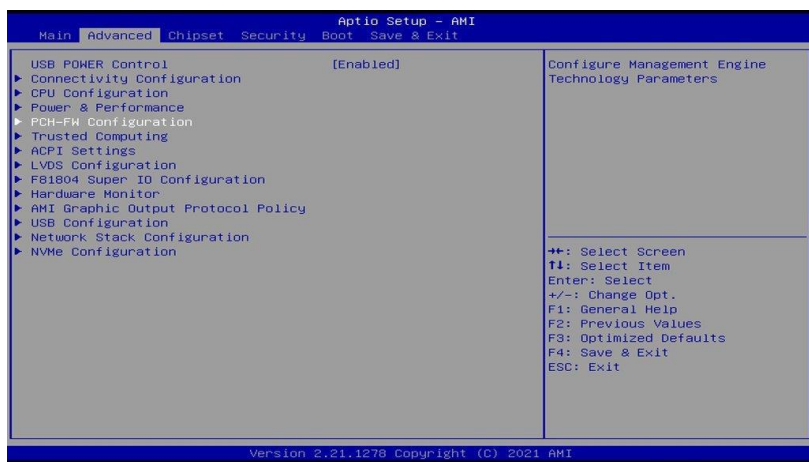


## 4.4.5 Trusted Computing




BIOS Setting	Description
Security Device Support	Enables / Disables BIOS support for security device. OS will not show security device. TCG EFI protocol and INT1A interface will not be available.
SHA-1 PCR Bank	Enables / Disables SHA-1 PCR Bank.
SHA256 PCR Bank	Enables / Disables SHA256 PCR Bank.
Pending operation	Schedule an operation for the security device. Note: Your computer will reboot during restart in order to change state of security device.
Platform Hierarchy	Enables / Disables platform hierarchy.
Storage Hierarchy	Enables / Disables storage hierarchy.
Endorsement Hierarchy	Enables / Disables endorsement hierarchy.
TPM2.0 UEFI Spec Version	Options: <ul style="list-style-type: none"> <li>• <b>TCG_1_2:</b> supports Win8/Win10.</li> <li>• <b>TCG_2:</b> supports new TCG2 protocol and event format for Windows 10 or later.</li> </ul>
Physical Presence Spec Version	Select to tell O.S. to support PPI Spec Version 1.2 or 1.3. Note some HCK tests might not support 1.3.
Device Select	TPM 1.2 will restrict support to TPM 1.2 devices. TPM 2.0 will restrict support to TPM 2.0 devices. Auto will support both with the default set to TPM 2.0 devices if not found, TPM 1.2 devices will be enumerated.

## 4.4.6 ACPI Settings

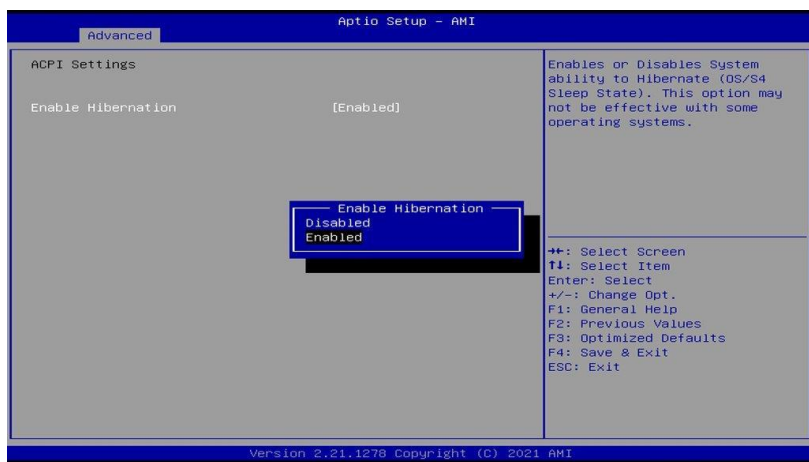

BIOS Setting	Description
Enable Hibernation	Enables / Disables the system ability to hibernate (OS/S4 Sleep State). This option may be not effective with some OS.

### 4.4.7 LVDS Configuration

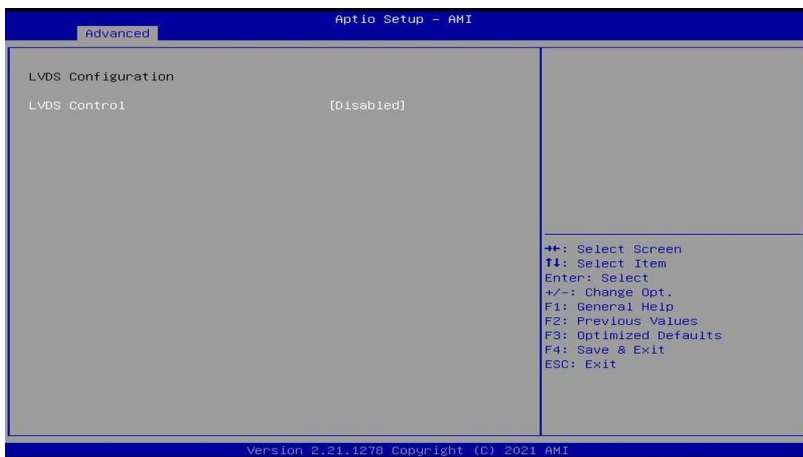

BIOS Setting	Description
LVDS Control	<b>Default: Disabled</b>
Panel Color Depth	Selects the panel color depth. Options: 18 bit, 24 bit
LVDS Channel Type	Chooses the LVDS as single or dual channel.
Backlight Voltage Level	Options: 3.3V, 5V
LCD Panel Type	Panel Type (Resolution) Options: 640 x 480, 800 x 600, 1024 x 768, 1280 x 768, 1280 x 800, 1280 x 960, 1280 x 1024, 1366 x 768, 1440 x 900, 1600 x 900, 1600 x 1200, 1680 x 1050, 1920 x 1080, 1920 x 1200
LVDS Brightness Control	Options: 0(Min), 1, 2, 3, 4, 5, 6, 7(Max)

## 4.4.8 F81804 Super IO Configuration

Advanced Aptio Setup - AMI	
F81804 Super IO Configuration	[Enabled] Provide the Standby Power for devices. [Disable] Shutdown the standby power.
Super IO Chip	F81804
Serial Port 1 Configuration	
Serial Port 2 Configuration	
Standby Power on S5(ERP)	[All Enable]



BIOS Setting	Description
Serial Ports Configuration	Sets parameters of serial ports. Enables / Disables the serial port and select an optimal setting for the Super IO device.
Standby Power on S5(ERP)	This feature is available in IB953EF but not in IB953AF.

Advanced Aptio Setup - AMI	
Serial Port 1 Configuration	Enable or Disable Serial Port (COM)
Serial Port Device Settings	[Enabled] IO=3F8h; IRQ=4;
Change Settings	[Auto]
SERIAL PORT MODE SELECT	[RS232 Mode]



Advanced Aptio Setup - AMI	
Serial Port 1 Configuration	Select an optimal settings for Super IO Device
Serial Port Device Settings	[Enabled] IO=3F8h; IRQ=4;
Change Settings	[Auto]
SERIAL PORT MODE SELECT	[RS232 Mode]
Change Settings	Auto IO=3F8h; IRQ=4; IO=3F8h; IRQ=3,4,5,6,7,9,10,11,12; IO=2F8h; IRQ=3,4,5,6,7,9,10,11,12; IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12; IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12;
	Select Screen Select Item Enter: Select

Advanced Aptio Setup - AMI	
Serial Port 1 Configuration	SERIAL PORT Loop Back/RS232/RS422/RS485 mode select
Serial Port Device Settings	[Enabled] IO=3F8h; IRQ=4;
Change Settings	[Auto]
SERIAL PORT MODE SELECT	[RS232 Mode]
SERIAL PORT MODE SELECT	RS232 Mode RS485 Mode RS422 Mode
	Select Screen Select Item



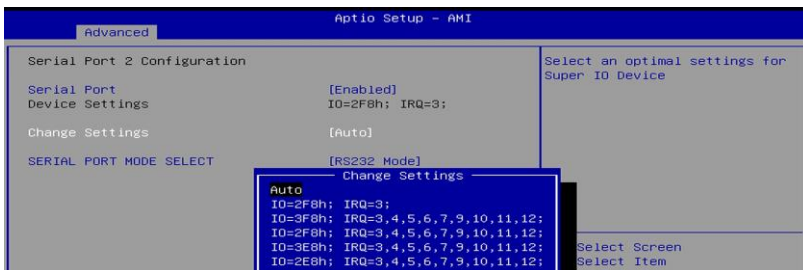
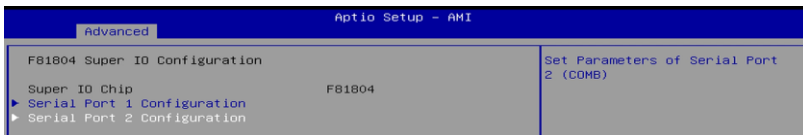


## 4.4.9 Hardware Monitor

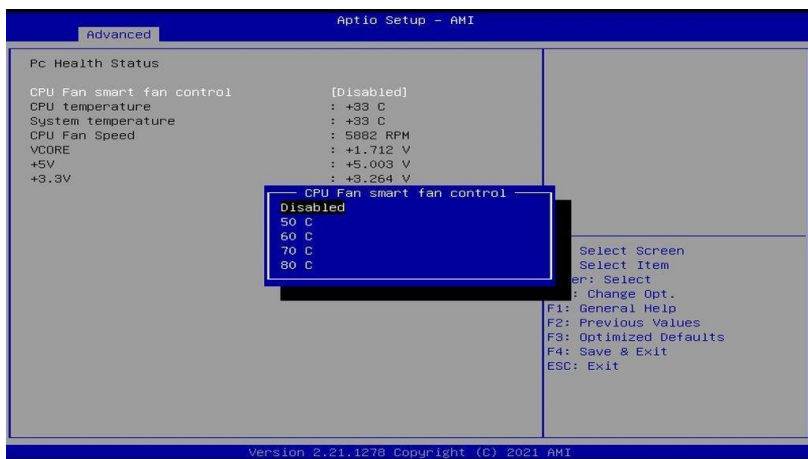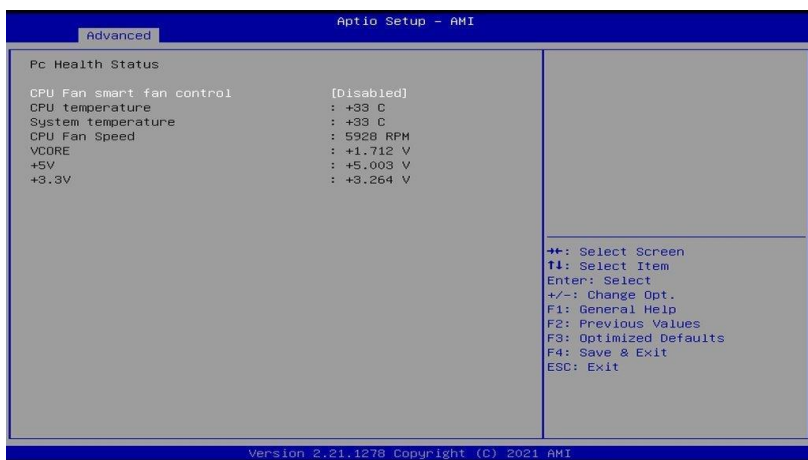


BIOS Setting	Description
CPU Fan smart fan control	Enables / Disables smart fan control.
Temperatures / Voltages	These fields are the parameters of the hardware monitoring function feature of the motherboard. The values are read-only values as monitored by the system and show the PC health status.

### 4.4.10 AMI Graphic Output Protocol Policy

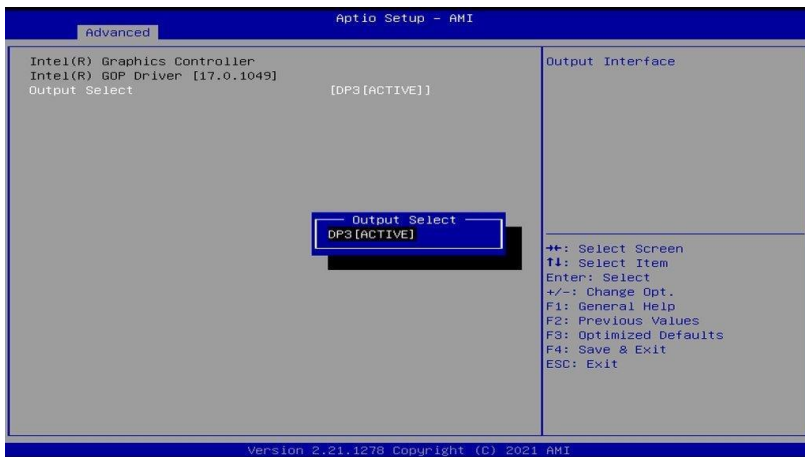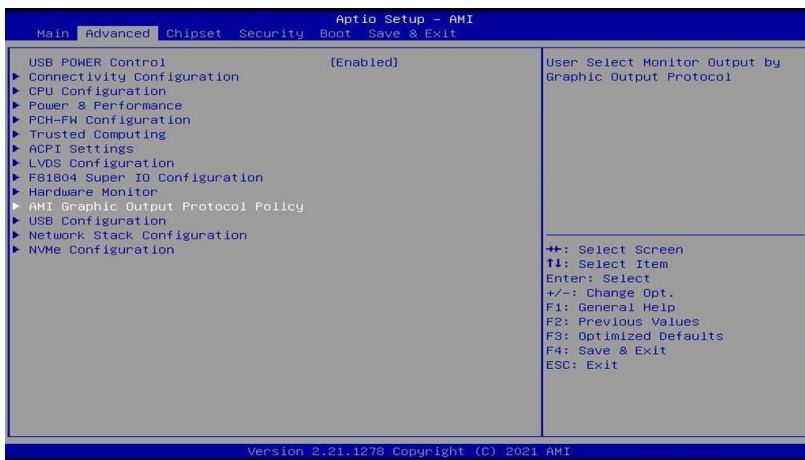


## 4.4.11 USB Configuration

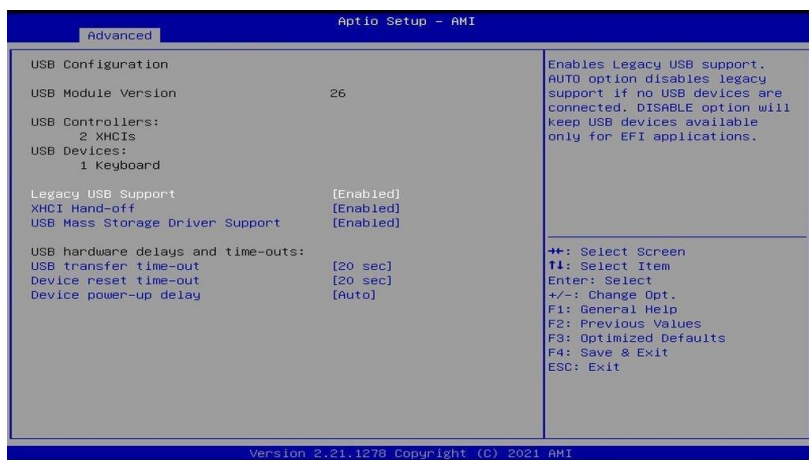



BIOS Setting	Description
Legacy USB Support	<ul style="list-style-type: none"> <li>• <b>Enabled</b> enables Legacy USB support.</li> <li>• <b>Auto</b> disables legacy support if there is no USB device connected.</li> <li>• <b>Disabled</b> keeps USB devices available only for EFI applications.</li> </ul>
XHCI Hand-off	This is a workaround for OSEs without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
USB Mass Storage Driver Support	Enables / Disables the support for USB mass storage driver.
USB Transfer time-out	The time-out value (1 / 5 10 / 20 secs) for Control, Bulk, and Interrupt transfers.
Device reset time-out	Gives seconds (10 / 20 / 30 / 40 secs) to delay execution of Start Unit command to USB mass storage device.
Device power-up delay	Max.time the device will take before it properly reports itself to the Host Controller. ' <b>Auto</b> ' uses default value: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.

## 4.4.12 Network Stack Configuration

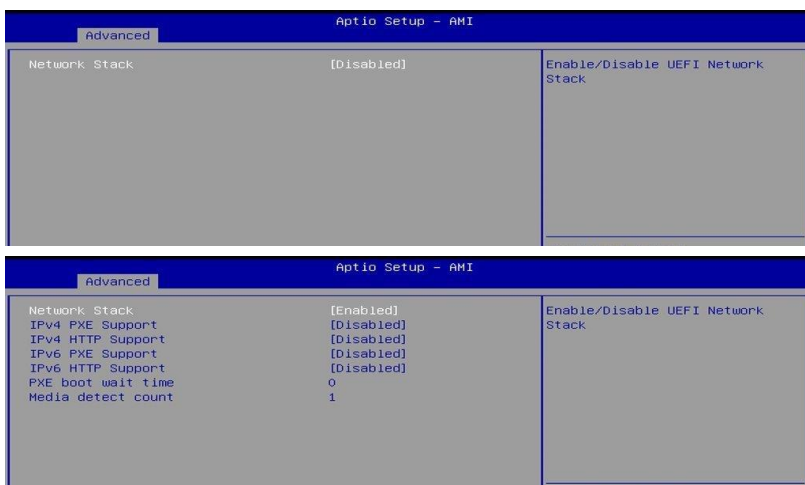


BIOS Setting	Description
Network Stack	Enable/Disable UEFI Network Stack
IPv4 PXE Support	If disabled, IPv4 PXE boot support will not be available.
IPv4 HTTP Support	If disabled, IPv4 HTTP boot support will not be available.
IPv6 PXE Support	If disabled, IPv6 PXE boot support will not be available.
IPv6 HTTP Support	If disabled, IPv6 HTTP boot support will not be available.
IPSEC Certificate	Support to Enable/Disable IPSEC certificate.
PXE boot wait time	Wait time in seconds to press ESC key to abort the PXE boot. Use either +/- or numeric keys to set the value
Media detect count	Number of times the presence of media will be checked. Use either +/- numeric keys to set the value.

## 4.4.13 NVMe Configuration

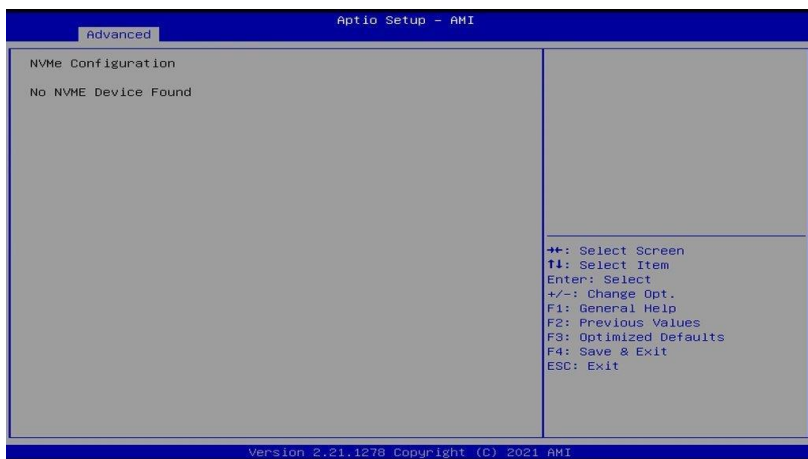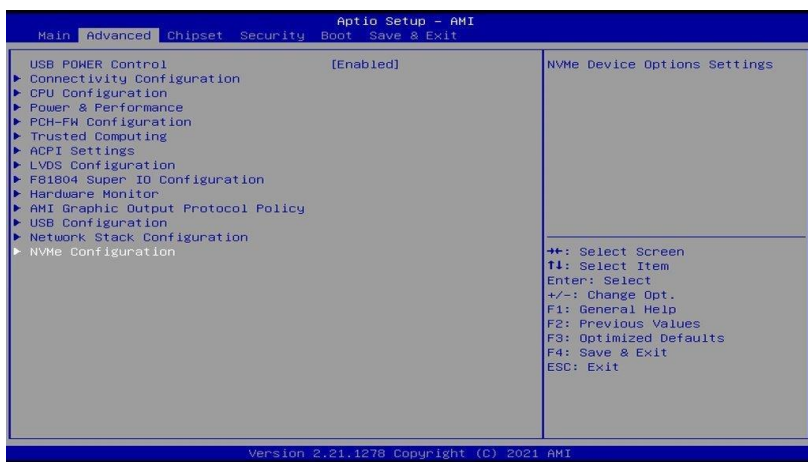


## 4.5 Chipset Settings

### 4.5.1 System Agent (SA) Configuration



#### 4.5.1.1. Graphics Configuration:



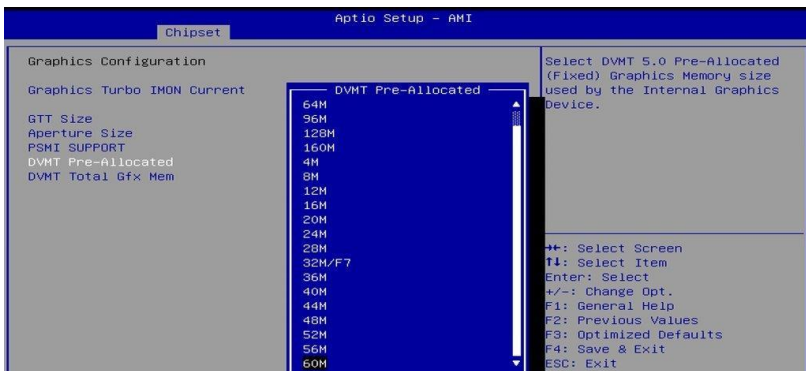


#### 4.5.1.2. VT-d






## 4.5.2 PCH-IO Configuration

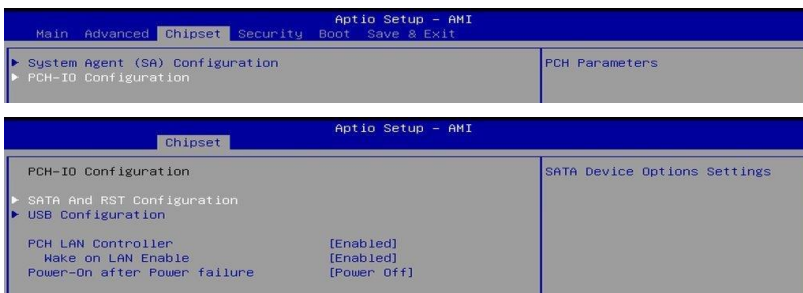


### 4.5.2.1 SATA and RST Configuration:

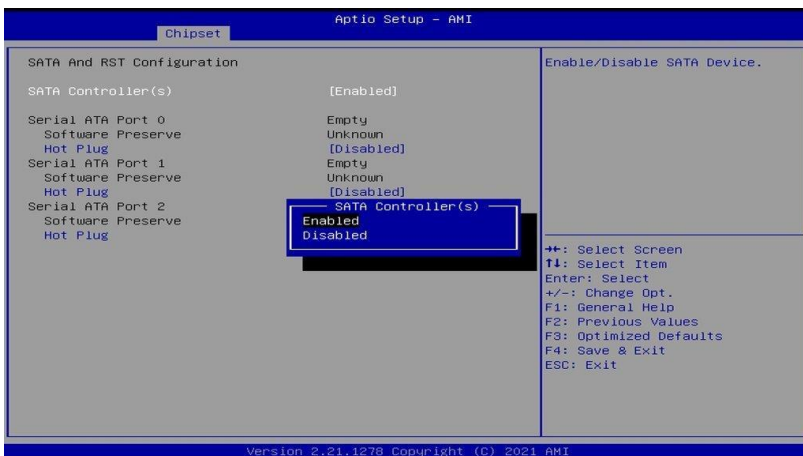


BIOS Setting	Description
SATA and RST Configuration	SATA device options and settings
SATA Controller(s)	Enables / Disables the Serial ATA.
SATA Mode Selection	Selects IDE or AHCI Mode.
Serial ATA Port 0~2	Enables / Disables Serial Port 0 ~ 2.
SATA Ports Hot Plug	Enables / Disables SATA Ports HotPlug.

## 4.5.2.2 SATA and RST Configuration:

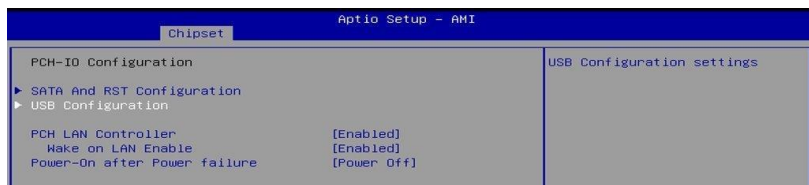


BIOS Setting	Description
USB Port Disable Overwrite	Selectively Enable/Disable the corresponding USB port from reporting a Device Connection to the controller. Options: Disabled, Select Per-Pin
USB SS Physical Connector	Enable/Disable the USB Physical Connector (physical port). Once disabled, any USB devices plug into the connector will not be detected by BIOS or OS.
PCH LAN Controller	Enables / Disables onboard NIC.
Wake on LAN Enable	Enables / Disables integrated LAN to wake the system.
Power-On after Power failure	Specify what state to to when power is re-applied after a power failure (G3 state)

## 4.6 Security Settings

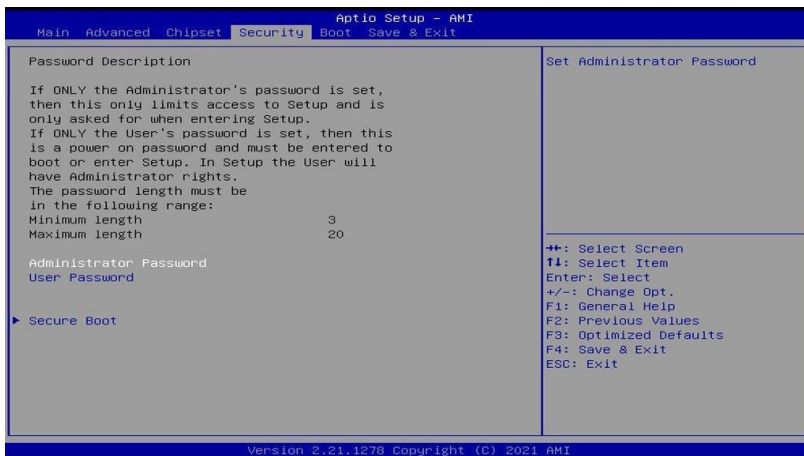


BIOS Setting	Description
Setup Administrator Password	Sets an administrator password for the setup utility.
User Password	Sets a user password.
Secure Boot	Secure Boot feature is Active if Secure Boot is enabled. Platform Key(PK) is enrolled and the system is in user mode. The mode change requires platform reset.
Secure Boot Mode	Secure Boot mode options: Standard or Custom. In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication


## 4.7 Boot Settings

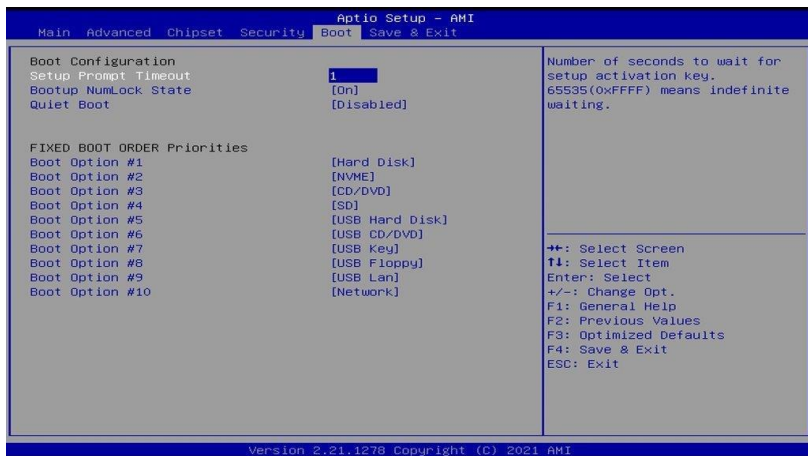

BIOS Setting	Description
Setup Prompt Timeout	Number of seconds to wait for setup activation key. 65535 (0xFFFF) means indefinite waiting.
Bootup NumLock State	Selects the keyboard NumLock state.
Quiet Boot	Enables / Disables Quiet Boot option.
FIXED BOOT ORDER Priorities	Sets the system boot order.

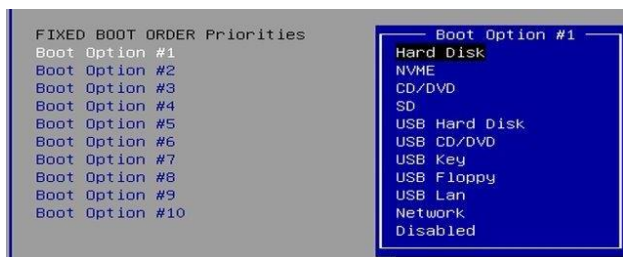

## 4.8 Save & Exit Settings

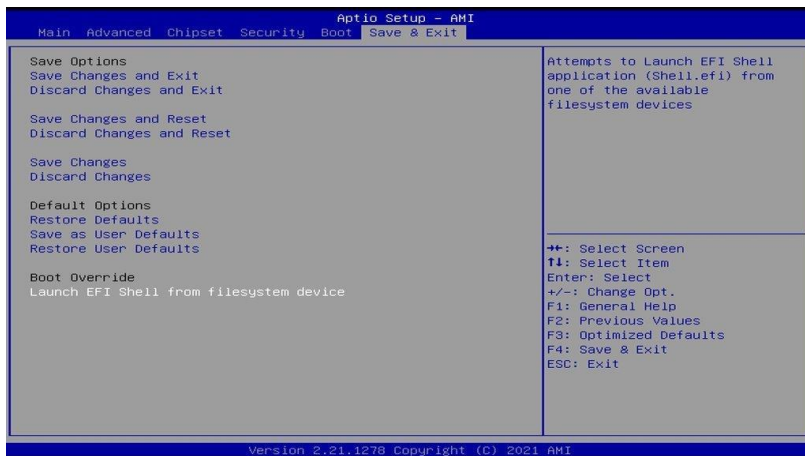

BIOS Setting	Description
Save Changes and Exit	Exits system setup after saving the changes.
Discard Changes and Exit	Exits system setup without saving any changes.
Save Changes and Reset	Resets the system after saving the changes.
Discard Changes and Reset	Resets system setup without saving any changes.
Save Changes	Saves changes done so far to any of the setup options.
Discard Changes	Discards changes done so far to any of the setup options.
Restore Defaults	Restores / Loads defaults values for all the setup options.
Save as User Defaults	Saves the changes done so far as User Defaults.
Restore User Defaults	Restores the user defaults to all the setup options.
Launch EFI Shell from filesystem device	Attempts to launch EFI shell application (Shell.efi) from one of the available filesystem devices.

This page is intentionally left blank.

# Appendix

This section provides the mapping addresses of peripheral devices and the sample code of watchdog timer configuration.

## A. I/O Port Address Map

Each peripheral device in the system is assigned a set of I/O port addresses which also becomes the identity of the device. The following table lists the I/O port addresses used.

Address	Device Description
0x0000A00-0x0000A0F	Motherboard resources
0x0000A20-0x0000A2F	Motherboard resources
0x0000A10-0x0000A1F	Motherboard resources
0x000002E-0x000002F	Motherboard resources
0x000004E-0x000004F	Motherboard resources
0x0000061-0x0000061	Motherboard resources
0x0000063-0x0000063	Motherboard resources
0x0000065-0x0000065	Motherboard resources
0x0000067-0x0000067	Motherboard resources
0x0000070-0x0000070	Motherboard resources
0x0000080-0x0000080	Motherboard resources
0x0000092-0x0000092	Motherboard resources
0x00000B2-0x00000B3	Motherboard resources
0x00000680-0x0000069F	Motherboard resources
0x0000164E-0x0000164F	Motherboard resources
0x0000020-0x0000021	Programmable interrupt controller
0x0000024-0x0000025	Programmable interrupt controller
0x0000028-0x0000029	Programmable interrupt controller
0x000002C-0x000002D	Programmable interrupt controller
0x0000030-0x0000031	Programmable interrupt controller
0x0000034-0x0000035	Programmable interrupt controller
0x0000038-0x0000039	Programmable interrupt controller
0x000003C-0x000003D	Programmable interrupt controller
0x00000A0-0x00000A1	Programmable interrupt controller
0x00000A4-0x00000A5	Programmable interrupt controller
0x00000A8-0x00000A9	Programmable interrupt controller
0x00000AC-0x00000AD	Programmable interrupt controller
0x00000B0-0x00000B1	Programmable interrupt controller
0x00000B4-0x00000B5	Programmable interrupt controller
0x00000B8-0x00000B9	Programmable interrupt controller
0x00000BC-0x00000BD	Programmable interrupt controller
0x00000D0-0x00000D1	Programmable interrupt controller
0x00001854-0x00001857	Motherboard resources
0x00004090-0x00004097	Standard SATA AHCI Controller
0x00004080-0x00004083	Standard SATA AHCI Controller
0x00004060-0x0000407F	Standard SATA AHCI Controller



<b>Address</b>	<b>Device Description</b>
0x000003F8-0x000003FF	Communications Port (COM1)
0x000002F8-0x000002FF	Communications Port (COM2)
0x00001800-0x000018FE	Motherboard resources
0x00004000-0x0000403F	Intel(R) UHD Graphics
0x00000000-0x00000CF7	PCI Express Root Complex
0x00000D00-0x0000FFFF	PCI Express Root Complex
0x00000040-0x00000043	System timer
0x00000050-0x00000053	System timer
0x00003000-0x00003FFF	Intel(R) PCI Express Root Port #7 - A0BE
0x00002000-0x000020FE	Motherboard resources
0x00000060-0x00000060	Standard PS/2 Keyboard
0x00000064-0x00000064	Standard PS/2 Keyboard
0x0000EFA0-0x0000EFBF	Intel(R) SMBus - A0A3

## B. Interrupt Request Lines (IRQ)

Peripheral devices use interrupt request lines to notify CPU for the service required. The following table shows the IRQ used by the devices on board.

### For IB953AF:

Level	Function
IRQ 4294967288	Intel(R) Ethernet Connection (13) I219-V
IRQ 4294967289	Intel(R) USB 3.10 eXtensible Host Controller - 1.20 (Microsoft)
IRQ 4294967291	Standard SATA AHCI Controller
IRQ 4294967290	Intel(R) USB 3.10 eXtensible Host Controller - 1.20 (Microsoft)
IRQ 4	Communications Port (COM1)
IRQ 3	Communications Port (COM2)
IRQ 4294967284	Intel(R) UHD Graphics
IRQ 54 ~ IRQ 204	Microsoft ACPI-Compliant System
IRQ 256 ~ IRQ 511	Microsoft ACPI-Compliant System
IRQ 4294967294	PCI Express Root Port
IRQ 14	Intel(R) GPIO Controller - 34C5
IRQ 0	System timer
IRQ 28	Trusted Platform Module 2.0
IRQ 4294967292	Intel(R) PCI Express Root Port #7 - A0BE
IRQ 4294967282	Intel(R) Management Engine Interface
IRQ 1	Standard PS/2 Keyboard
IRQ 12	Microsoft PS/2 Mouse
IRQ 4294967287	Intel(R) I211 Gigabit Network Connection
IRQ 4294967286	Intel(R) I211 Gigabit Network Connection
IRQ 4294967285	Intel(R) I211 Gigabit Network Connection
IRQ 4294967283	Intel(R) I211 Gigabit Network Connection
IRQ 4294967293	PCI Express Root Port
IRQ 16	High Definition Audio Controller
IRQ 17	USB Synopsys Controller

## C. Watchdog Timer Configuration

The Watchdog Timer (WDT) is used to generate a variety of output signals after a user programmable count. The WDT is suitable for use in the prevention of system lock-up, such as when software becomes trapped in a deadlock. Under these sorts of circumstances, the timer will count to zero and the selected outputs will be driven.

Under normal circumstance, you will need to restart the WDT at regular intervals before the timer counts to zero.

### Sample Code:

```
//-----
//
// THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY
// KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE
// IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR
// PURPOSE.
//
//-----
#include <dos.h>
#include <conio.h>
#include <stdio.h>
#include <stdlib.h>
#include " F81804.H"
//-----
int main (int argc, char *argv[]);
void EnableWDT(int);
void DisableWDT(void);
//-----
int main (int argc, char *argv[])
{
    unsigned char bBuf;
    unsigned char bTime;
    char **endptr;

    char SIO;

    printf("Fintek 81866 watch dog program\n");
    SIO = Init_ F81804();
    if (SIO == 0)
    {
        printf("Can not detect Fintek 81866, program abort.\n");
        return(1);
    }
    //if (SIO == 0)

    if (argc != 2)
    {
        printf(" Parameter incorrect!!\n");
        return (1);
    }
}
```

```

bTime = strtol( argv[1], endptr, 10);
printf("System will reset after %d seconds\n", bTime);

if (bTime)
{
    EnableWDT(bTime); }
else
{
    DisableWDT();}
return 0;
}
//-----
void EnableWDT(int interval)
{
    unsigned char bBuf;

    bBuf = Get_ F81804_Reg(0x2B);
    bBuf &= (~0x20);
    Set_ F81804_Reg(0x2B, bBuf);           //Enable WDTO

    Set_ F81804_LD(0x07);                 //switch to logic device 7
    Set_ F81804_Reg(0x30, 0x01);         //enable timer

    bBuf = Get_ F81804_Reg(0xF5);
    bBuf &= (~0x0F);
    bBuf |= 0x52;
    Set_ F81804_Reg(0xF5, bBuf);         //count mode is second

    Set_ F81804_Reg(0xF6, interval);     //set timer

    bBuf = Get_ F81804_Reg(0xFA);
    bBuf |= 0x01;
    Set_ F81804_Reg(0xFA, bBuf);         //enable WDTO output

    bBuf = Get_ F81804_Reg(0xF5);
    bBuf |= 0x20;
    Set_ F81804_Reg(0xF5, bBuf);         //start counting
}
//-----
void DisableWDT(void)
{
    unsigned char bBuf;

    Set_ F81804_LD(0x07);                 //switch to logic device 7

    bBuf = Get_ F81804_Reg(0xFA);
    bBuf &= ~0x01;
    Set_ F81804_Reg(0xFA, bBuf);         //disable WDTO output

    bBuf = Get_ F81804_Reg(0xF5);
    bBuf &= ~0x20;
    bBuf |= 0x40;
    Set_ F81804_Reg(0xF5, bBuf);         //disable WDT
}
//-----

//-----
//

```

```

// THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY
// KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE
// IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR
// PURPOSE.
//
//-----
#include " F81804.H"
#include <dos.h>
//-----
unsigned int F81804_BASE;
void Unlock_ F81804 (void);
void Lock_ F81804 (void);
//-----
unsigned int Init_ F81804(void)
{
    unsigned int result;
    unsigned char ucDid;

    F81804_BASE = 0x4E;
    result = F81804_BASE;

    ucDid = Get_ F81804_Reg(0x20);
    if (ucDid == 0x07)                //Fintek 81866
    {      goto  Init_Finish;      }

    F81804_BASE = 0x2E;
    result = F81804_BASE;

    ucDid = Get_ F81804_Reg(0x20);
    if (ucDid == 0x07)                //Fintek 81866
    {      goto  Init_Finish;      }

    F81804_BASE = 0x00;
    result = F81804_BASE;

Init_Finish:
    return (result);
}
//-----
void Unlock_ F81804 (void)
{
    outputb( F81804_INDEX_PORT, F81804_UNLOCK);
    outputb( F81804_INDEX_PORT, F81804_UNLOCK);
}
//-----
void Lock_ F81804 (void)
{
    outputb( F81804_INDEX_PORT, F81804_LOCK);
}
//-----
void Set_ F81804_LD( unsigned char LD)
{
    Unlock_ F81804();
    outputb( F81804_INDEX_PORT, F81804_REG_LD);
    outputb( F81804_DATA_PORT, LD);
    Lock_ F81804();
}
}

```

```
//-----  
void Set_ F81804_Reg( unsigned char REG, unsigned char DATA)  
{  
    Unlock_ F81804();  
    outputb( F81804_INDEX_PORT, REG);  
    outputb( F81804_DATA_PORT, DATA);  
    Lock_ F81804();  
}  
//-----  
unsigned char Get_ F81804_Reg(unsigned char REG)  
{  
    unsigned char Result;  
    Unlock_ F81804();  
    outputb( F81804_INDEX_PORT, REG);  
    Result = inportb( F81804_DATA_PORT);  
    Lock_ F81804();  
    return Result;  
}  
//-----  
  
//-----  
//  
// THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY  
// KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE  
// IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR  
// PURPOSE.  
//  
//-----  
#ifndef F81804_H  
#define F81804_H 1  
//-----  
#define F81804_INDEX_PORT ( F81804_BASE)  
#define F81804_DATA_PORT ( F81804_BASE+1)  
//-----  
#define F81804_REG_LD 0x07  
//-----  
#define F81804_UNLOCK 0x87  
#define F81804_LOCK 0xAA  
//-----  
unsigned int Init_ F81804(void);  
void Set_ F81804_LD( unsigned char);  
void Set_ F81804_Reg( unsigned char,  
unsigned char); unsigned char  
Get_ F81804_Reg( unsigned char);  
//-----  
#endif // F81804_H
```

## D. Onboard Connector Reference Types

Function	Connector	Onboard Type	Compatible Mating Type
Audio	J2	Hao Guo Xing Ye DF11-12S-PA66H	Hirose DF11-12DS-2C
SATA HDD Power	J13	E-CALLI 0110-071-040	JST XHP-4
Front Panel Setting	J18	E-CALL 2.5 mm-pitch pin header (male)	E-CALL 2.5 mm-pitch pin header (Female)
USB 2.0	J6	Hao Guo Xing Ye DF11-8S-PA66H	Hirose DF11-8DS-2C
Battery	J3	Molex 53047-0210	Molex 51021-0200
COM2 Serial Port	J19	Hao Guo Xing Ye DF11-10S-PA66H	Hirose DF11-10DS-2C
DC Power Input	J7	Hao Guo Xing Ye WAFER396-2S-WV	JST VHR-2N
Digital I/O	J17	Dupont 2.00 mm-pitch pin header (Male)	Dupont 2.00 mm-pitch (Female)
LCD Backlight	J15	E-CALL 0110-161-040	JST PHR-4.
LVDS	J12, J14	Hirose DF20G-20DP-1V	Hirose DF20A-20DS-1C
eDP	CN2	KEL SSL00-40S	KEL SSL20-40S

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecaq.de](mailto:info@fortecaq.de)  
Internet: [www.fortecaq.de](http://www.fortecaq.de)

---

## Fortec Group Members

### Austria



### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hinchingsbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



### Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1  
Ronkonkoma, NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)