



**OUR GLOBAL
COMPETENCE
CENTRES**

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY




Datasheet

Congatec

conga-TCA5


**COM Express® Compact Module with Intel® Apollo Lake Pentium® N4200, Celeron® N3350 or Atom™
E39xx Series Processors**

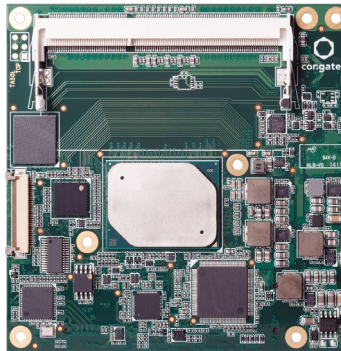

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

LOW POWER CONSUMPTION

conga-TCA5

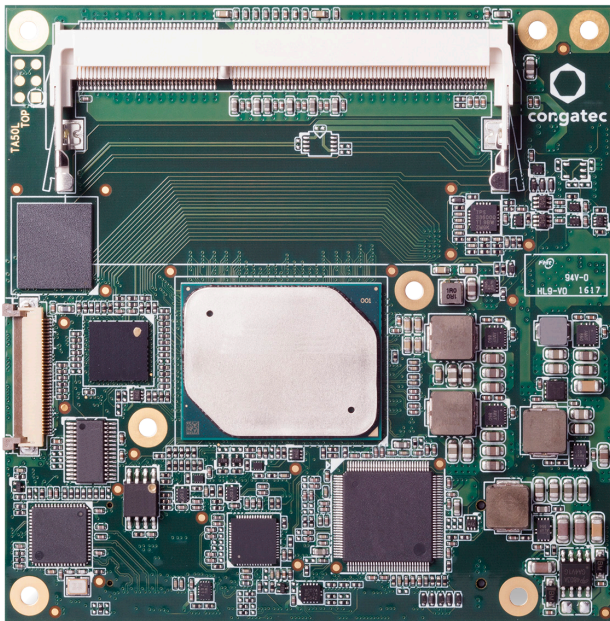


- Intel® Pentium® Quad Core on COM Express
- Enhanced Security Execution
- Up to 3 independent Ultra HD displays

COM  **Express®**

Formfactor	Formfactor COM Express® Compact (95 x 95 mm) Type 6 Connector Layout					
CPU	Intel® Pentium® N4200	2.50 GHz (Burst) 1.1 GHz Clock	Quad Core	L2 cache 2MB	6W TDP	
	Intel® Celeron® N3350	2.40 GHz (Burst) 1.1 GHz Clock	Dual Core	L2 cache 2MB	6W TDP	
	Intel® Atom™ x7-E3950	2.00 GHz (Burst) 1.6 GHz Clock	Quad Core	L2 cache 2MB	12W TDP	
	Intel® Atom™ x5-E3940	1.80 GHz (Burst) 1.6 GHz Clock	Quad Core	L2 cache 2MB	9.5W TDP	
	Intel® Atom™ x5-E3930	1.80 GHz (Burst) 1.3 GHz Clock	Dual Core	L2 cache 2MB	6.5W TDP	
DRAM	2 SO-DIMM sockets for DDR3L memory modules up to 8 GByte with 1867 MT/s Dual channel memory interface for increased graphics performance					
Chipset	Integrated in SoC					
Ethernet	Intel i210 (Industrial) /i211 (Commercial) Gigabit Ethernet Controller					
I/O Interfaces	5x PCIe x1 4x USB 3.0 (XHCI) 8x USB 2.0 (EHCI) 2x SATA III LPC SPI I ² C bus (fast mode 400 kHz multi-master) SDIO 2x UART (RX/TX)s opt. 2x MIPI-CSI					
Mass Storage	opt. eMMC 5.0 onboard flash up to 64 GByte					
Sound	Digital High Definition Audio Interface					
Graphics	Intel® HD Graphics 500 with support for 4k Ultra HD displays DirectX 12 OpenGL 4.4 OpenCL 2.0 OpenGL ES 3.0 HDCP 1.4 (wired), HDCP 2.0 (wireless) Video decode hardware acceleration including support for 4kp60 HEVC (H.265), H.264, MVC, VP8, VP9, VC-1, WMV9, JPEG/MJPEG Video encode hardware acceleration including support for 4kp30 HEVC (H.265), H.264, MVC, VP8, JPEG/MJPEG.					
LVDS	Dual channel LVDS transmitter support for flat panels with 2x24 bit data mapping up to a resolution of 1920x1200@60Hz.					
Digital Display Interface (DDI)	Up to 2x DDI (max. 3840x2160 @ 30Hz) 1x eDP 1.3 (optional)					
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I ² C bus (fast mode, 400 kHz, multi-master) Power Loss Control					
Embedded BIOS Features	OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update based on AMI Aptio UEFI					
Security	Trusted Platform Module (TPM) optional. Hash and RSA algorithms key lengths up to 2048 bits real random number generator					
Power Management	ACPI 5.0 with battery support					
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Microsoft® Windows 10 IoT Core Linux Yocto					
Power Consumption	see user's guide for full details CMOS Battery Backup					
Temperature	Commercial :	Operating: 0 to +60°C	Storage: -20 to +80°C			
	Industrial:	Operating: -40 to +85°C	Storage: -20 to +80°C			
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.					
Size	95 x 95 mm (3.74" x 3.74")					

conga-TCA5 | Block diagram

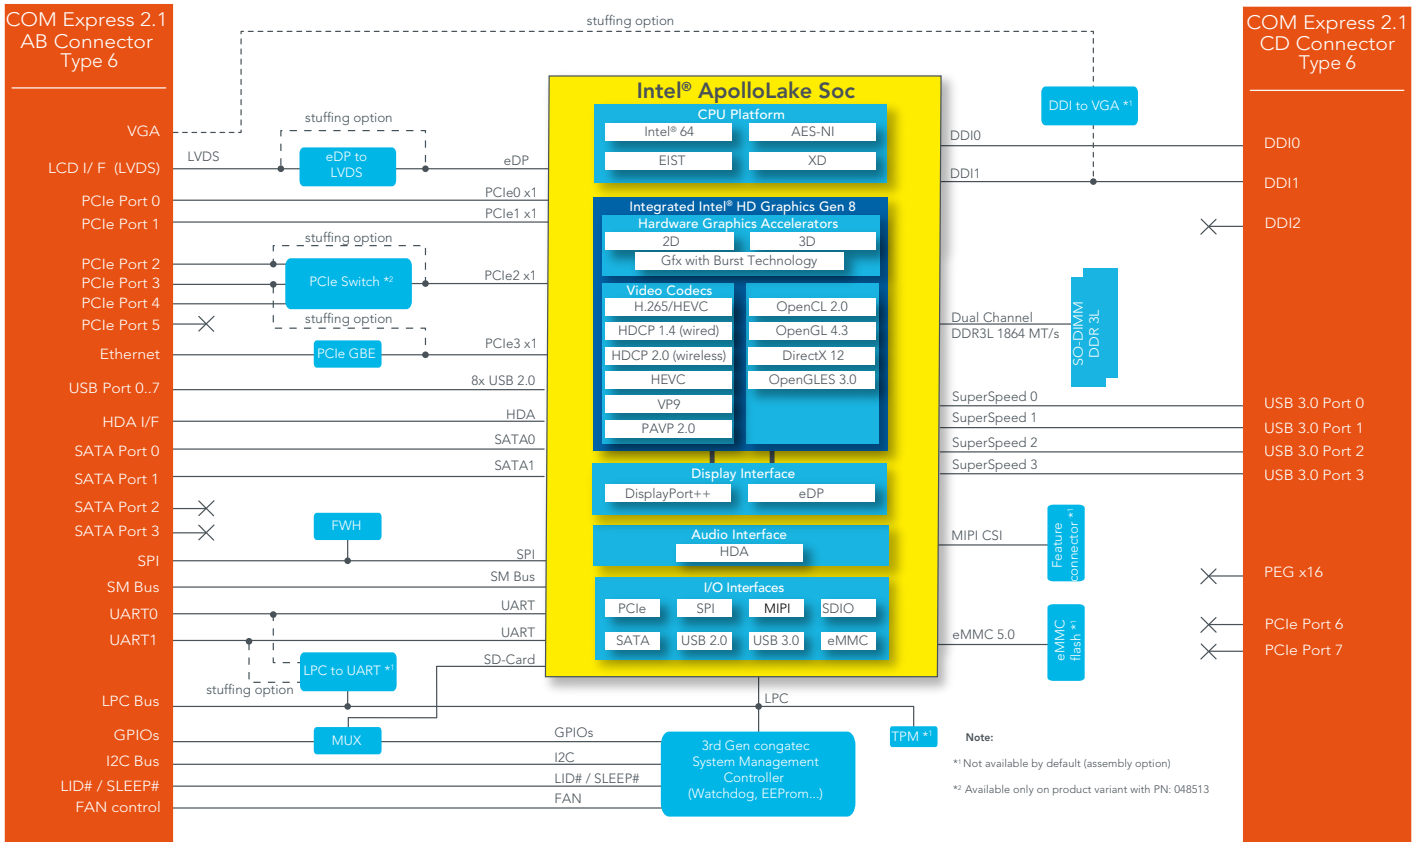

conga-TCA5 | Order Information

Article	PN	Description
conga-TCA5/i-E3950	048510	COM Express Compact module with Intel® Atom™ x7-E3950 quad core processor with 1.6GHz core frequency up to 2.0GHz, 2MB L2 cache and up to 8GB 1866MT/s DDR3L SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA5/i-E3940	048511	COM Express Compact module with Intel® Atom™ x5-E3940 quad core processor with 1.6GHz core frequency up to 1.8GHz, 2MB L2 cache and up to 8GB 1866MT/s DDR3L SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA5/i-E3930	048512	COM Express Compact module with Intel® Atom™ x5-E3930 dual core processor with 1.1GHz core frequency up to 1.8GHz, 2MB L2 cache and up to 8GB 1866MT/s DDR3L SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA5/N3350	048530	COM Express Compact module with Intel® Celeron™ N3350 dual core processor with 1.1GHz core frequency up to 2.4GHz, 2MB L2 cache and up to 8GB 1866MT/s DDR3L SODIMM memory support.
conga-TCA5/N4200	048531	COM Express Compact module with Intel® Pentium® N4200 quad core processor with 1.5GHz core frequency up to 2.5GHz, 2MB L2 cache and up to 8GB 1866MT/s DDR3L SODIMM memory support.
conga-TCA5/i-CSP-T	048555	Passive cooling solution for COM Express Compact module conga-TCA5 with lidded Intel Atom processor. All standoffs are M2.5mm thread.
conga-TCA5/i-CSP-B	048554	Passive cooling solution for COM Express Compact module conga-TCA5 with lidded Intel Atom processor. All standoffs are with 2.7mm bore hole.
conga-TCA5/i-HSP-T	048551	Standard heatspreader for COM Express Compact module conga-TCA5 with lidded Intel Atom processor. All standoffs are M2.5mm thread.
conga-TCA5/i-HSP-B	048550	Standard heatspreader for COM Express Compact module conga-TCA5 with lidded Intel Atom processor. All standoffs are with 2.7mm bore hole.
conga-TCA5/CSP-T	048557	Passive cooling solution for COM Express Compact module conga-TCA5 with open silicon Intel Pentium and Celeron processor. All standoffs are M2.5mm thread.
conga-TCA5/CSP-B	048556	Passive cooling solution for COM Express Compact module conga-TCA5 with open silicon Intel Pentium and Celeron processor. All standoffs are with 2.7mm bore hole.
conga-TCA5/HSP-T	048553	Standard heatspreader for COM Express Compact module conga-TCA5 with open silicon Intel Pentium and Celeron processor. All standoffs are M2.5mm thread.
conga-TCA5/HSP-B	048552	Standard heatspreader for COM Express Compact module conga-TCA5 with open silicon Intel Pentium and Celeron processor. All standoffs are with 2.7mm bore hole.
DDR3L-SODIMM-1866 (2GB)	068730	DDR3L SODIMM memory module with 1866 MT/s and 4GB RAM
DDR3L-SODIMM-1866 (4GB)	068731	DDR3L SODIMM memory module with 1866 MT/s and 8GB RAM
DDR3L-SODIMM-1866 (8GB)	068732	DDR3L SODIMM memory module with 1866 MT/s and 8GB RAM
DDR3L-SODIMM-1866 (2GB) / i-temp	068733	Industrial DDR3L SODIMM memory module with 1866 MT/s and 2GB RAM
DDR3L-SODIMM-1866 (4GB) / i-temp	068734	Industrial DDR3L SODIMM memory module with 1866 MT/s and 4GB RAM
DDR3L-SODIMM-1866 (8GB) / i-temp	068735	Industrial DDR3L SODIMM memory module with 1866 MT/s and 8GB RAM
Accessories		
conga-TEVAL	065810	Evaluation carrier board for Type 6 COM-Express-modules
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM

This Datasheet should be read in conjunction with "[Errata sheet - congatec xA5 designs](#)", available in the document section of congatec's webportal.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com