



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet


iBase

RM-N8M Series

Wide-Temperature SMARC™ 2.0 CPU Module with
NXP ARM® Cortex-A53/Cortex-M4 i.MX 8M Quad 1.3GHz Processor



The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

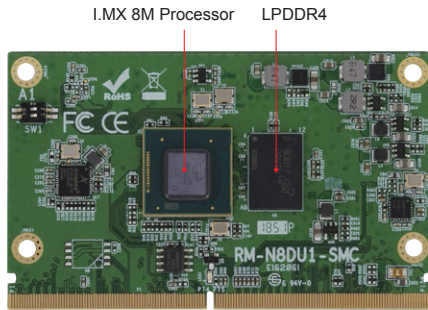

Specifications

Form Factor	SMARC™ V2.0
Processor	NXP i.MX 8M Quad Cortex™-A53 /Cortex™-M4, 1.3GHz
System Memory	3GB LPDDR4 on board
Flash Memory	16GB eMMC on board
Display	1x MIPI-DSI 4-lane up to 1920 x 1080 at 60Hz 1x HDMI V2.0a, up to 4K
Video Codec	<ul style="list-style-type: none"> 4Kp60 HEVC/H.265 main, and main 10 decoder 4Kp60 VP9 decoder 4Kp30 AVC/H.264 decoder 1080p60 MPEG-2, MPEG-4p2, VC-1, VP8, RV9, AVS, MJPEG, H.263 decoder
Graphics	<ul style="list-style-type: none"> GC7000Lite OpenGL ES 1.1, 2.0, 3.0, 3.1, Open CL 1.2, and Vulkan
Audio Interface	2x I²S, 1x SPDIF
LAN	1x GbE LAN
USB	2x USB3.0/USB2.0 with OTG interface
Image Capture Interface	2x MIPI-CSI2 4-lane each
Serial Interface	4x UART, 2x SPI
Media Interface	2x High-speed MMC/SDIO (MMC 8-bit, SDIO 4-bit)
PCI-E	2x PCI-E (x1) Gen2
SATA	N/A
GPIO	12x GPIO
I²C	4x I²C
CAN Bus	N/A
Dimensions	82mm x 50mm (3.2" x 2")
Environment	Humidity: 0 % to 90 % RH at 60° C (non-condensing) Shock: Non-operating: 1G, 15 mins (x-, y-, z-axis) Vibration: Non-operating: 3 Hz to 500 Hz, 15 mins
Operating Temperature	-25°C ~ 85°C (-13°F ~ 185°F)
OS Support	Yocto 2.5 Android 9
Certification	CE/ FCC Class B


Features

- With NXP Cortex™-A53/Cortex™-M4, i.MX 8M Quad 1.3GHz processor
- 3GB LPDDR4, 16GB eMMC
- Rich peripheral I/O support
- Validated with Yocto v2.5 and Android 9
- Long life time supply with Nxp solution
- Compliant with SGeT standard SMARC™ V2.0

Ordering Information

RM-N8M-Q316I	Industrial grade SMARC™ 2.0 CPU module, Cortex™-A53 i.MX 8M Quad 1.3GHz, 3GB LPDDR4, 16GB TLC eMMC
--------------	--

Dimensions

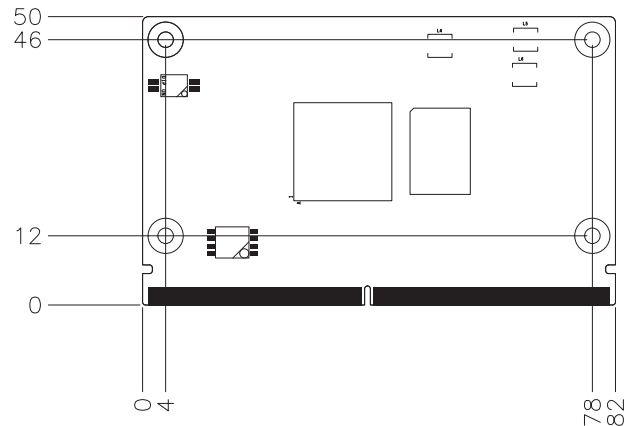

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecaq.de
Internet: www.fortecaq.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com