



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY




Datasheet


iBase

MI989

AMD Ryzen™ Embedded V2000 Series Mini-ITX Motherboard




The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

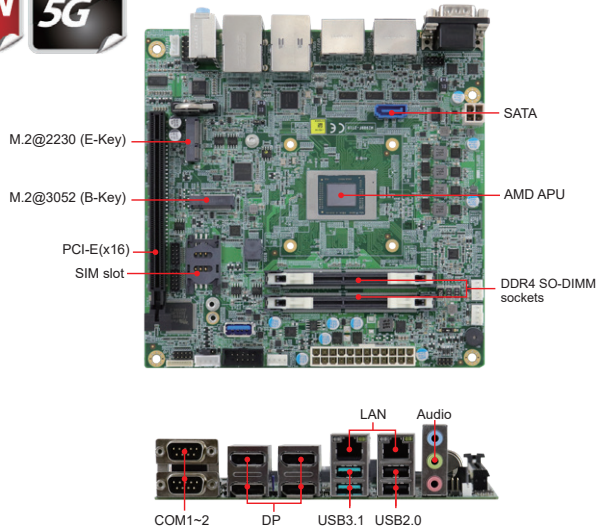

Features

- AMD Ryzen™ Embedded V2000 Series on board
- 2x DDR4 SO-DIMM, Max. 64GB, ECC compatible
- Dual Intel® Gigabit LAN
- 4x DisplayPort 1.4
- 3x USB3.1, 2x USB2.0, 4x COM, 1x SATA III
- 1x PCI-E(x16), 3x M.2 (B-Key, E-Key and M-Key)
- Watchdog timer, Digital I/O, TPM (2.0)




Specifications

CPU Socket	BGA1140
CPU	AMD V2000 series APU on board
PCH	N/A
Memory Types	2x DDR4-3200 SO-DIMM socket, Max 64GB, ECC compatible
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	2x M.2 (B-Key/ M-key)
Expansion Slots	1x PCI-E (x16)
Mini Type Slots	1x M.2 (E-Key, type:2230) 1x M.2 (B-Key, type:3052) 1x M.2 (M-key, type:2280, NVMe)
Graphics Controller	AMD Radeon Graphics
Video Output	4x DisplayPort 1.4
Ethernet	2x Intel® I211AT Gigabit LAN
I/O Chip	F81966D-I
Serial Port	4x COM Port
USB 2.0	2x USB2.0
USB 3.0/ 3.1	3x USB3.1 (10Gbps)
Serial ATA	1x SATA3.0
Audio	built-in HD audio + Realtek ALC888S codec
TPM	2.0
Others	Digital I/O, SIM
Dimensions (L x W)	170mm x 170mm (6.7" x 6.7")
Power Consumption	TBD
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Relative Humidity	95% (non-condensing @60°C)

Ordering Information

MI989F-2718	AMD Ryzen™ V2718 APU (1.7GHz~4.15GHz) on board Mini-ITX motherboard, with 4x DisplayPort, dual Gigabit LAN, TPM (2.0), EuP/ErP, CPU cooler on board
MI989F-2748	AMD Ryzen™ V2748 APU (2.9GHz~4.15GHz) on board Mini-ITX motherboard, with 4x DisplayPort, dual Gigabit LAN, TPM(2.0), EuP/ErP, CPU cooler on board

Dimensions and Drawing

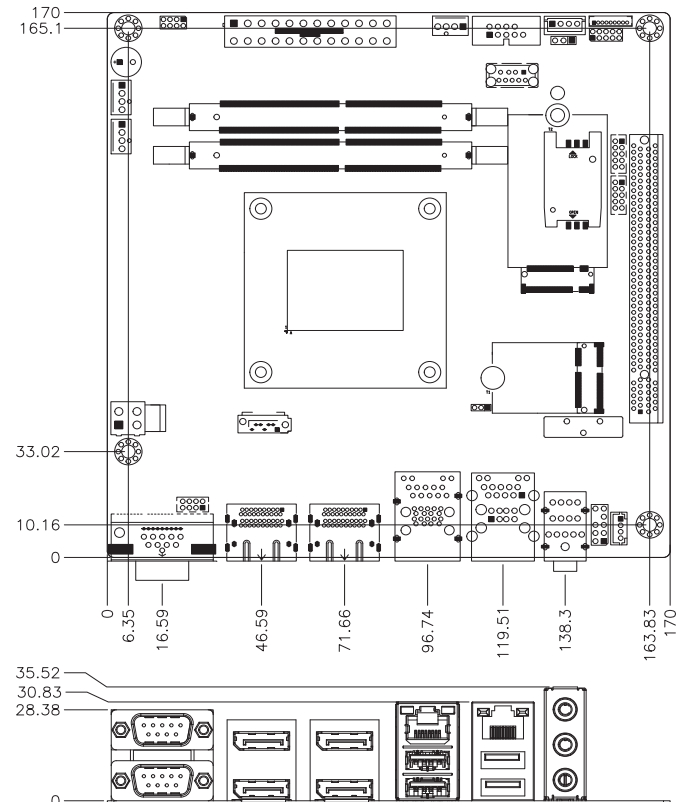

1 CPU Modules

2 Disk-Size SBCs

3 Motherboards

4 CPU cards

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com