



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

iBase


IB837

3.5" Single Board Computer Intel® Celeron® N & J Series



The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

NEW

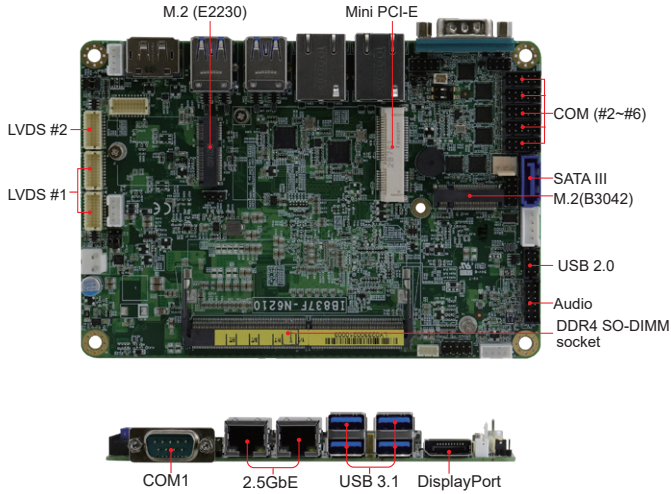

Features

- Onboard Intel® Celeron® N & J series processor
- 1x DDR4-3200 SO-DIMM, Max. 16GB
- Supports 1x DisplayPort & 2x dual channel LVDS
- 2x I226V PCI-E 2.5G LAN, 6x COM ports
- 4x USB 3.1, 2x USB 2.0, 1x SATA III (shared with M/2 B-key)
- 2x M.2 sockets (E-key & B-key), 1x Mini PCI-E slot (full-size)
- Watchdog timer, Digital I/O, fTPM, mSATA, 12V only DC-in




Specifications

CPU	Intel® Celeron® QC J6412 (2.0GHz/2.6GHz) Intel® Celeron® DC N6210 (1.2GHz/2.6GHz)
PCH	N/A
Memory	1x DDR4 SO-DIMM, Max. 16GB
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	1x mSATA 1x M.2 B3042
Mini Type Slots	1x Mini PCI-E, 1x M.2 (E2230), 1x M.2 (B3042)
Graphics Controller	Intel® SoC integrated Gen11 Graphics
Video Output	1x DisplayPort, 2x 24-bit dual-channel LVDS
Ethernet	2x Intel® I226V PCI-E Gigabit LAN
I/O Chipset	Fintek F81966D-I
Serial Port	1x RS232/422/485 (Jumperless selection) & 5x RS232
USB 2.0	2x USB 2.0 (pin-header)
USB 3.X	4x USB 3.1 (Type A)
Serial ATA	1x SATA III (shared with M.2 B-key)
Audio	Built-in HD with Realtek ALC888S + amplifier
TPM	fTPM
Others	Digital I/O (4-in/4-out), +12V DC-in
Dimensions (L x W)	102mm x 147mm (4" x 5.8")
Power Consumption	Intel® Celeron® J6412 2.00GHz w/ 8GB DDR4-3200 +12V:1.57A
Operating Temperature	0°C~60°C (32°F ~140°F)
Storage Temperature	-20°C~80°C (-4°F ~176°F)
Relative Humidity	95% (non-condensing@60°C)

Ordering Information

IB837F-J6412	Intel® Celeron® J6412 (2GHz~2.6GHz) onboard 3.5-inch SBC, w/ 2x 2.5GbE LAN, 1x DisplayPort, 2x LVDS (24-bit LVDS Dual channel), mSATA, M.2, 12V DC-in
IB837F-N6210	Intel® Celeron® N6210 (1.2GHz~2.6GHz) onboard 3.5-inch SBC, w/ 2x 2.5GbE LAN, 1x DisplayPort, 2x LVDS (24-bit LVDS Dual channel), mSATA, M.2, 12V DC-in
HSIB837-A	Heatsink for IB837
HSIB837-1	Heat spreader for IB837

Dimensions and Drawing

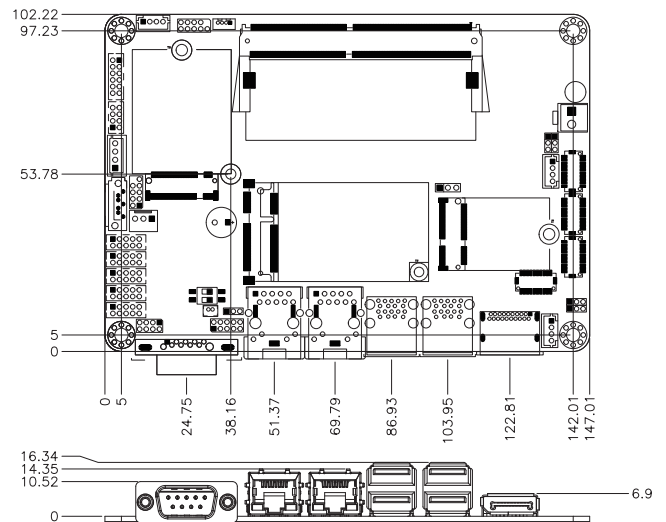

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com