



**OUR GLOBAL
COMPETENCE
CENTRES**

 APOLLO DISPLAY
TECHNOLOGIES



FORTEC
INTEGRATED



FORTEC
UNITED KINGDOM






Datasheet

iBase

IB962

3,5" SBC with 14th Gen Intel® Core™ Ultra 7/5 100 Series mobile processors

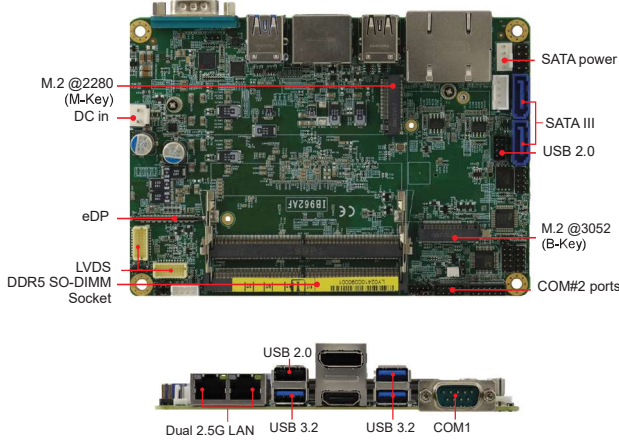

Features

- Onboard 14th Gen Intel® Core™ Ultra 7/5 100 Series mobile processors
- 2x DDR5 SO-DIMM, Max. 64GB
- Supports HDMI, DP++, LVDS and eDP
- 1x Intel® I226LM 2.5G LAN, 1x Intel® I226V 2.5G LAN
- 3x USB 2.0, 3x USB 3.2, 2x COM, 2x SATA III
- 3x M.2 slots (M-Key + E-Key + B-Key)
- Supports 5G, digital I/O (4-in/4-out), dTPM/ftPM & watchdog timer


Specifications

CPU	14th Gen Intel® Core™ Ultra 7/5 100 Series processors
PCH	N/A
Memory	2x DDR5 SO-DIMM, Max. 64GB
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	M.2 (M2280 for NVMe)
Mini Type Slots	1x M.2 (M-Key, Type:2280, supports NVMe with PCI-E(4x) signal only) 1x M.2 (E-Key, Type:2230, supports CNVj) 1x M.2 (B-Key, Type:3052, supports 5G/LTE)
Graphics Controller	Intel 14th Generation Core series built-in Iris Xe Graphics
Video Output	HDMI, DisplayPort, eDP & LVDS
Ethernet	Intel® I226LM as 1st LAN, I226V as 2nd LAN
I/O Chipset	Fintek F81804U-I on board
Serial Port	2x RS232/422/485
USB 2.0	5x USB 2.0 (1x Type-A ; 4x via pin headers)
USB 3.X	3x USB 3.2 (Type-A)
Serial ATA	2x SATA III
Audio	14th Gen Intel® Core™ Ultra Series processor built-in HD audio + ALC888S codec
TPM	dTPM/ftPM
Others	Digital I/O (4-in/4-out); +12V~+24V DC-in
Dimensions (L x W)	102mm x 147mm (4" x 5.8")
Power Consumption	TBD
Operating Temperature	0°C~60°C (-4°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10% ~ 90% (non-condensing)

Ordering Information

IB962AF-165H	Intel® Core™ Ultra7-165H 3.5" SBC, w/ I226LM + I226V 2.5G LAN, VGA (HDMI+DisplayPort + eDP + LVDS), 2x SATA III, 2x COM, 3x M.2 (M2280/ E2230& B3052), DC in (12V~24V), supports iAMT, dTPM/ftPM(2.0), optional Heatsink, w/o cable kit, (RoHS 2)
IB962AF-165U	Intel® Core™ Ultra7-165U 3.5" SBC, w/ I226LM + I226V 2.5G LAN, VGA (HDMI+DisplayPort + eDP + LVDS), 2x SATA III, 2x COM, 3x M.2 (M2280/ E2230& B3052), DC in (12V~24V), supports iAMT, dTPM/ftPM(2.0), optional Heatsink, w/o cable kit, (RoHS 2)
HSIB962-A	Heatsink for IB962
HSIB962-1	Heat spreader for IB962

Dimensions and Drawing

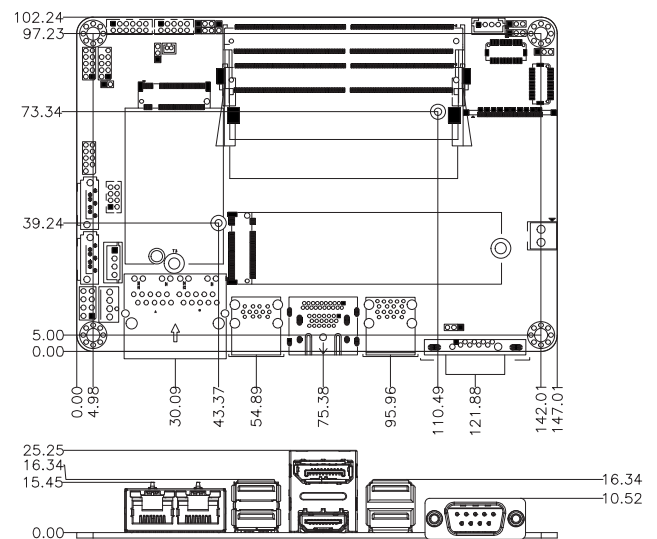

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC
GROUP

FORTEC Elektronik AG
Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC
INTEGRATED

Distec GmbH Office Vienna
Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



FORTEC
INTEGRATED

Distec GmbH
Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC
A FORTEC GROUP MEMBER

ALTRAC AG
Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



FORTEC
UNITED KINGDOM

Display Technology Ltd.
Osprey House, 1 Osprey Court
Hinchingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



 **APOLLO DISPLAY**
TECHNOLOGIES
A FORTEC GROUP MEMBER

Apollo Display Technologies, Corp.
87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com