



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY




Datasheet


NEXCOM

X200

3.5" Single Board Computer with 11th Gen. Intel® Core™ Rocket Lake Processor

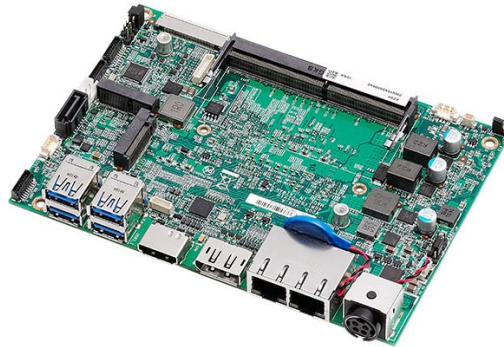

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

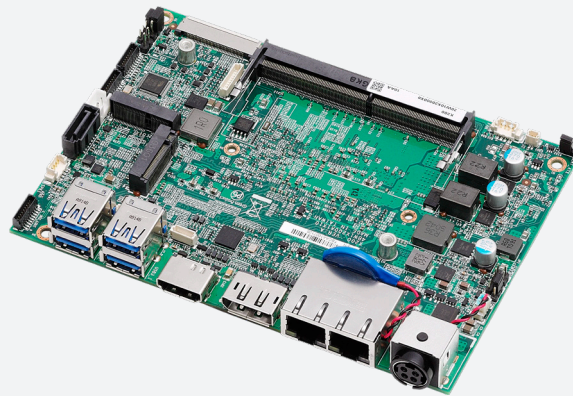

Main Features

- 11th Generation Intel® Core™ processor SoC
- 3.5" embedded form factor
- Dual 4K @ 60Hz display output, DP++, HDMI 2.0
- Support 4K @ 60Hz eDP display output
- Dual LAN ports and USB 3.0 ports for easy connection
- Onboard M.2 2280 Key M (PCIe x4) for storage modules
- Onboard M.2 2230 Key E for optional Wi-Fi modules
- Support extended temperature and outdoor application

Product Overview

The X200 is a 3.5" SBC embedded board, powered by multi-core SoC Intel® Core™ processor. This series of 3.5" board is aimed at embedded applications. It supports a maximum memory of 32GB DDR4 SDRAM, offers triple display outputs of 4K HDMI, DP++, and eDP to provide the flexibility of supporting a range of peripherals. The X200 is a great solution featuring a low power consumption and small footprint for multimedia applications.

Specifications

CPU Support

- Onboard 11th Generation Intel® Core™ i3-1115G4E processor, Dual Core, 2.2 GHz base Frequency, 6M Cach (15W)
- Onboard 11th Generation Intel® Core™ i5-1145G7E processor, Dual Core, 1.5 GHz base Frequency, 8M Cach (15W)
- Onboard 11th Generation Intel® Core™ i7-1185G7E processor, Quad Core, 1.8 GHz, 12M Cache (15W) (by request)

Chipset

- SoC

Main Memory

- 1 x 260-pin DDR4 SO-DIMM, supports non-ECC, un-buffered memory up to 32G

Graphics & Display

- Intel® UHD graphics on i3 processor
- Intel® Iris® Xe graphics on i5 processor
- 1 x DP++, support 4096 x 2304 @ 60Hz
- 1 x HDMI 2.0, support 4096 x 2160 @ 60Hz
- 1 x eDP, support 4096 x 2160 @ 60Hz

LAN

- 1 x Intel® I219-LM GbE PHY, support Intel vPro® platform technology (for Intel® Core™ i5 or above processor)
- 1 x Intel® I211-AT GbE LAN

Storage

- 1 x M.2 2280 Key M, support PCIe x4 (512GB Max.)
- 1 x SATA 3 & SATA power connector for optional 2.5" SSD

I/O Function - Edge

- 1 x 12V DC Jack
- 2 x RJ45 Intel® Gigabit LAN port
- 1 x DP++
- 1 x HDMI 2.0
- 4 x USB 3.2 (Gen 2)


I/O Interface-Internal

- 4 x USB 2.0, internal connector
- 1 x Mic-in, 1 x Line-out, internal connector
- 1 x Speaker-out with 2W/4Ω amplifier, internal connector
- 6 x GPIO pin header for 3 x GPI and 3 x GPO
- 1 x 4-pin connector for PWM smart FAN
- 1 x 12V, 2A power output coming from main power source to additional module use
- 1 x eDP: support 4096 x 2160 @ 60Hz
- Onboard TPM 2.0
- 1 x RS232/422/485, internal pin header (COM1)
- 1 x RS232, internal pin header (COM2)

Expansion

- 1 x M.2 2230 Key E, support optional Wi-Fi modules

Block Diagram

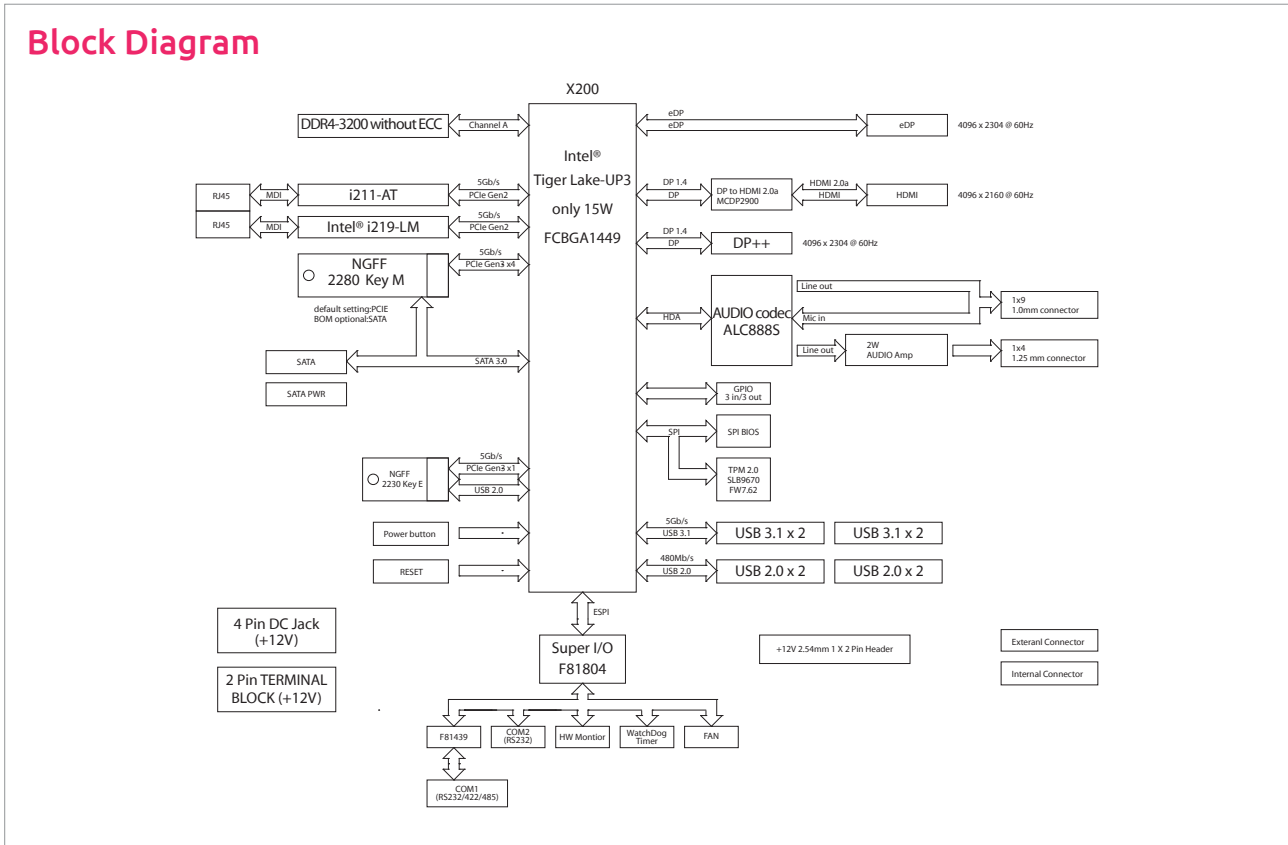

Power Requirements

- 12V DC input via DC Jack
- 2-Pin internal DC input connector as the option

Environment

- Operating temperature: -20°C to 70°C
- Storage temperature: -20°C to 80°C
- Humidity: 10 to 90% (non-condensing)

Certification

- CE Approval
- FCC Class A

Dimensions

- 146mm (W) x 102mm (D)

Operating System Support

- Win10/Linux

Ordering Information

- **X200-i5 (P/N: 10W10X20000X0)**
Embedded board with Intel® Core™ i5-1145G7E processor
- **X200-i3 (P/N: 10W10X20002X0)**
Embedded board with Intel® Core™ i3-1115G4E processor
- **Heatsink with fin (P/N: 5050301025X00)**
- **Heatsink (P/N: 5050301026X00)**

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com