



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

Nexcom

Neu-X302

Fanless industrial Box PC for LGA socket type

Intel® 9th / 8th Gen. Intel® Core™ Processor and Intel® Q370 / H310 Chipset



The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



Main Features

- Support 8th/9th Intel® Core™ socket type processor
- Dual Channel DDR4 SO-DIMM, 32GB max.
- 1 x VGA and 1 x HDMI 1.4 4K display output
- Dual Intel® LAN ports
- 6 x COM port, 10 x USB, Mic in/Line-out
- Optional TPM 2.0 for security advantage
- Support Intel® AMT Technology
- Onboard M.2 B Key/E Key for storage & wireless connection

Product Overview

The Neu-X302 is an industrial grade fanless edge computing system powered by Intel® 8th/9th Core™ i7/i5/i3 and Celeron processors (formerly Coffee Lake) with Intel® Q370/H310 express chipset. In addition to the great computing performance, the Neu-X302 features with outstanding GPU performance based on Intel® UHD Graphics 630 engine. The Neu-X302 system comes with rich I/O connectivity including 6 x COM ports, 4 x USB 3.0, 2 x LANs, 1 x VGA and 1 x HDMI 1.4 for 4K display output. There are 6 more expandable USB 2.0 which can be added to the edge by request. It also comes in great expansion possibilities, including two M.2 slot for support SSD storage, Wi-Fi or LTE connectivity. The Neu-X302 is perfect for industrial testing equipment or measurement machine applications which need rich I/O connectivity in high demand for supercomputing and graphic performance.

Specifications

CPU Support

- Support following listed processor

Generation	Socket type	CPU	Smart Cache	Cores	Threads	Base Frequency	TDP
8th Coffee Lake	FCLGA1151	i3-8100T	6M	4	4	3.1GHz	35W
8th Coffee Lake	FCLGA1151	i5-8500T	9M	6	6	2.1GHz	35W
8th Coffee Lake	FCLGA1151	i7-8700T	12M	6	12	2.4GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i3-9100TE	6M	4	4	2.2GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i5-9500TE	9M	6	6	2.2GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i7-9700TE	12M	8	8	1.8GHz	35W

Chipset & Memory

- Intel® PCH Q370
- Intel® PCH H310
- 2x DDR4 SO-DIMM socket, supports up to 32G DDR4 2666 SDRAM, with un-buffered and non-ECC

Graphic & Display

- Intel® UHD Graphics 630
- 1 x VGA output on the edge, resolution up to 1920 x 1200 @ 60Hz
- 1 x HDMI 1.4 output on the edge, resolution up to 4096 x 2160 @ 30Hz
- 1 x LVDS internal connector, dual channel, resolution up to 1920 x 1200 @ 60Hz (eDP: by request)


I/O Interface on the Front

- Power button
- HDD LED status
- 3 x RS232 DB9 COM port (COM4 support RI 5V or 12V)
- 2 x Antenna holes

I/O Interface on the Rear

- +12V DC input
- 1 x HDMI 1.4 output, resolution up to 4096 x 2160 @30Hz
- 3 x RS232/422/485 DB9 COM ports
- 1 x VGA output
- 2 x Intel® GbE LAN ports (Intel® I219-LM and I211-AT)
- 4 x USB 3.0
- 1 x Mic-in, 1 x Line-out powered by Realtek ALC888

Dimension Drawing

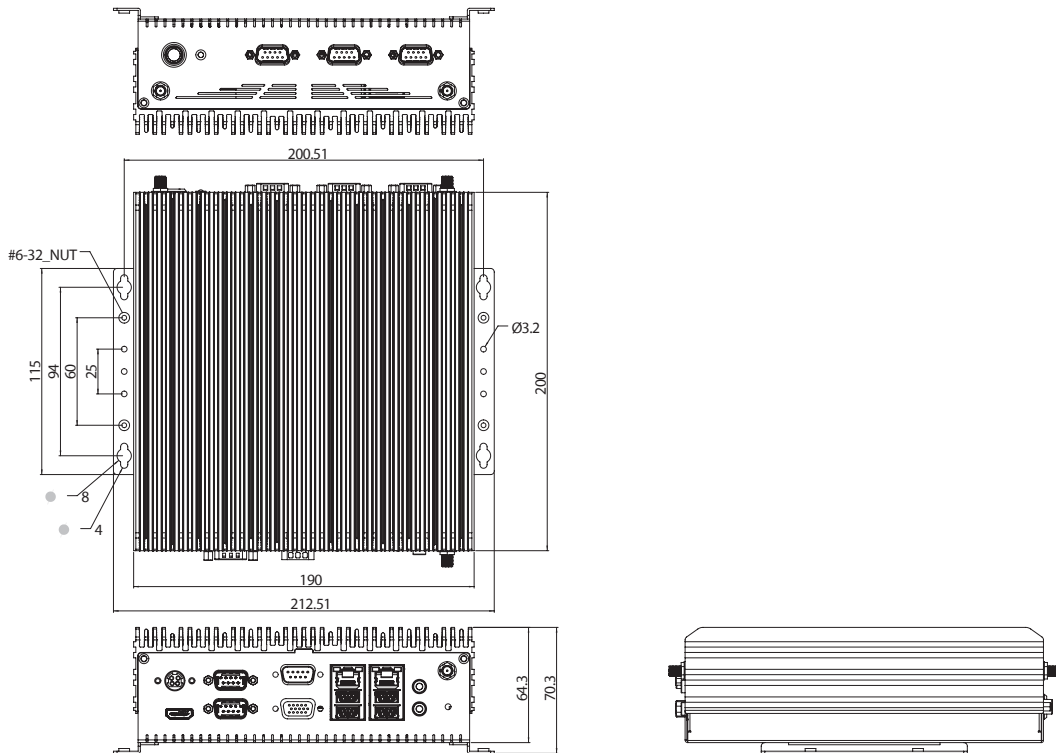

Internal I/O Function

- 6 x USB 2.0, internal pin header (with Intel® Q370 chipset)
- 4 x USB 2.0, internal pin header (with Intel® H310 chipset)
- 8 channel GPIO, 5V TTL level
- 1 x Internal pin header for speaker with 2W amplifier

Expansion

- 1 x M.2 E Key, 2230, support optional Wi-Fi/Bluetooth module
- 1 x M.2 B Key, 2242/3042, support optional SSD/3G/4G or LTE module
- 1 x SIM card holder for M.2 B Key use

Storage

- 1 x 2.5" SATA SSD space
- 1 x M.2 B Key, 2242, support optional storage module if 3G / 4G / LTE will not be used

Power Requirements

- +12V DC input
- Equip with 96W AC/DC power adapter in carton
- AT/ATX power setting by jumper (ATX as the default)

Environment

- Operating temperature: -5°C to 45°C ambient with air flow (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Relative humidity (non-condensing): 95% (non-condensing)
- Storage temperature: -20 ~ 80°C
- Shock protection: 50G peak acceleration, 11ms according to IEC60068-2-27

- Vibration protection
 - Random: 2Grms @ 5~500 Hz, IEC60068-2-64
 - Sinusoidal: 2G @ 5~500 Hz, IEC60068-2-6

Certification

- CE approval (EN55032/EN55035)
- FCC Class A

Mechanical & Dimension

- Aluminum and metal chassis with fanless design
- 200mm (L) x 190mm (W) x 64.3mm (H) without mounting bracket
- 200mm (L) x 212.5mm (W) x 70.3mm (H) with mounting bracket

Weight Information

- Gross weight: 4.25kgs
- Net weight: 2.68kgs

Ordering Information

- **Neu-X302-Q (P/N: 10W10X30200X0)**
8th/9th Intel® Core™ Edge Computing Fanless System with Intel® Q370 onboard
- **Neu-X302-H (P/N: 10W10X30201X0)**
8th/9th Intel® Core™ Edge Computing Fanless System with Intel® H310 onboard

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com