



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY



# Datasheet

## Distec

**POS-IQ-101-02-PRO**  
**10.1" Monitor with Hover Touch**

MO-06-108



**PRO**SERIES

Version 0.2

13.09.2023



---

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

## Table of Contents

1	Revision History .....	4
2	Description .....	5
3	Characteristics .....	6
3.1	Interfaces .....	6
4	Mechanical Drawing .....	7
5	Optional Accessories .....	8
5.1	Overview .....	8
5.2	Mounting Frame .....	9
5.2.1	Mounting instruction .....	10

## 1 Revision History

Date	Rev.No.	Description	Page
22.10.2021	0.1	Preliminary Version	All
13.09.2023	0.2	12-24V	5-6

## 2 Description

Distec's 10.1" POS-IQ-101-02-PRO is a CE certified/IP65 proof front monitor solution, powered with an integrated State-of-the-Art embedded PC. Therefore, it is the perfect platform for high-performance visualization projects.

Its robust but slim cover offers all options for integration and various applications. The POS-IQ-101-02-PRO is equipped with an industrial high-brightness display and is designed for long term availability.

The POS-IQ-101-02-PRO is equipped with the Hover Touch technology. It allows to operate PCAP touchscreens contactless with 1 finger. More information about this groundbreaking technology can be found in our [Flyer](#).

The POS-IQ Series features:

- an ambient light sensor for automatic brightness adjustment to ambient light conditions
- integrated passive cooling, which allows operating the system under full load even at high ambient temperatures
- VESA Mounting holes for using it as an HMI, mounted on a swivel arm or monitor stand
- As Option: in-wall mounting frame for a variety of integrations in concrete, wooden, or drywall constructions

The integrated IPC offers all advantages of a modern 64bit x86 PC:

- High performance for a passive system due to an Intel® Pentium® N4200 processor
- Dual Gigabit Ethernet, 4 x USB 3.0
- HDMI 1.4b, DisplayPort 1.2 and RS-232/422/485 interfaces
- 4GB highspeed RAM and an industrial grade SSD with 64GB memory
- driven by single 12V-24V power supply
- *As Option:* Wireless - or Bluetooth adapters to be connected via LAN or USB

### Available Software:


The POS-IQ-PRO series is shipped with Windows 10 embedded off the shelf. Of course the device can be used with different operation systems and various application software can be installed.

- More details regarding available application software and operating systems can be found in the [flyer](#)


### 3 Characteristics

Items	Unit	Specification
Screen Diagonal	[inch]	10.1
Pixels H x V		1280 x 800
Supported Colors		262K (6bit color) / 16.7M (8bit color)
Brightness	[cd/m <sup>2</sup> ]	850
Viewing Angle	v/h	85/85/85/85
Nominal Input Voltage	[V]	12-24
Typical Power Consumption	[W]	22
Memory	GB	4
SSD	GB	64
Electrical Interface		2 x Gbit LAN, 4 x USB 3.0, HDMI, DisplayPort, 1 x RS-232/422/485
PCAP Touchscreen Touchpoints	finger	10
Hover points	finger	1
Storage Temperature	[°C]	0 to +70
Operating Temperature Range	[°C]	0 to +60
IP rating		Front IP65
Physical Size H x V x D	[mm]	264.1 x 182.7 x 48.6
Active Area H x V	[mm]	218.4 x 137
Weight	[kg]	1.7

#### 3.1 Interfaces

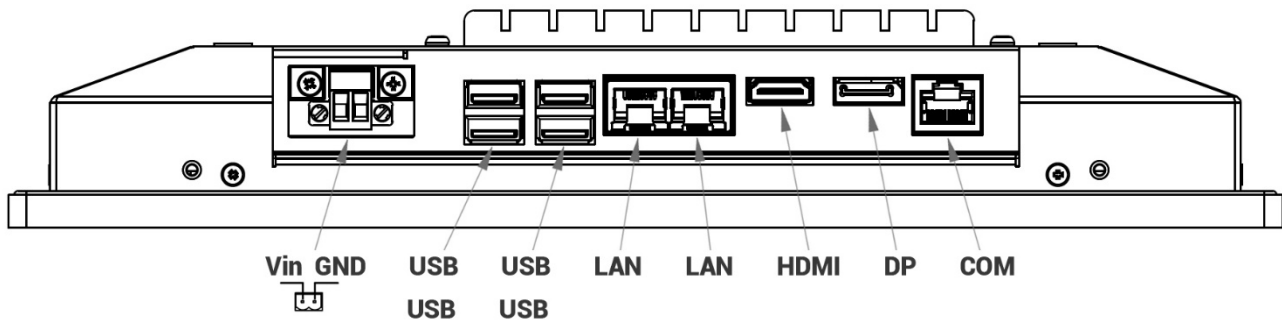

## 4 Mechanical Drawing

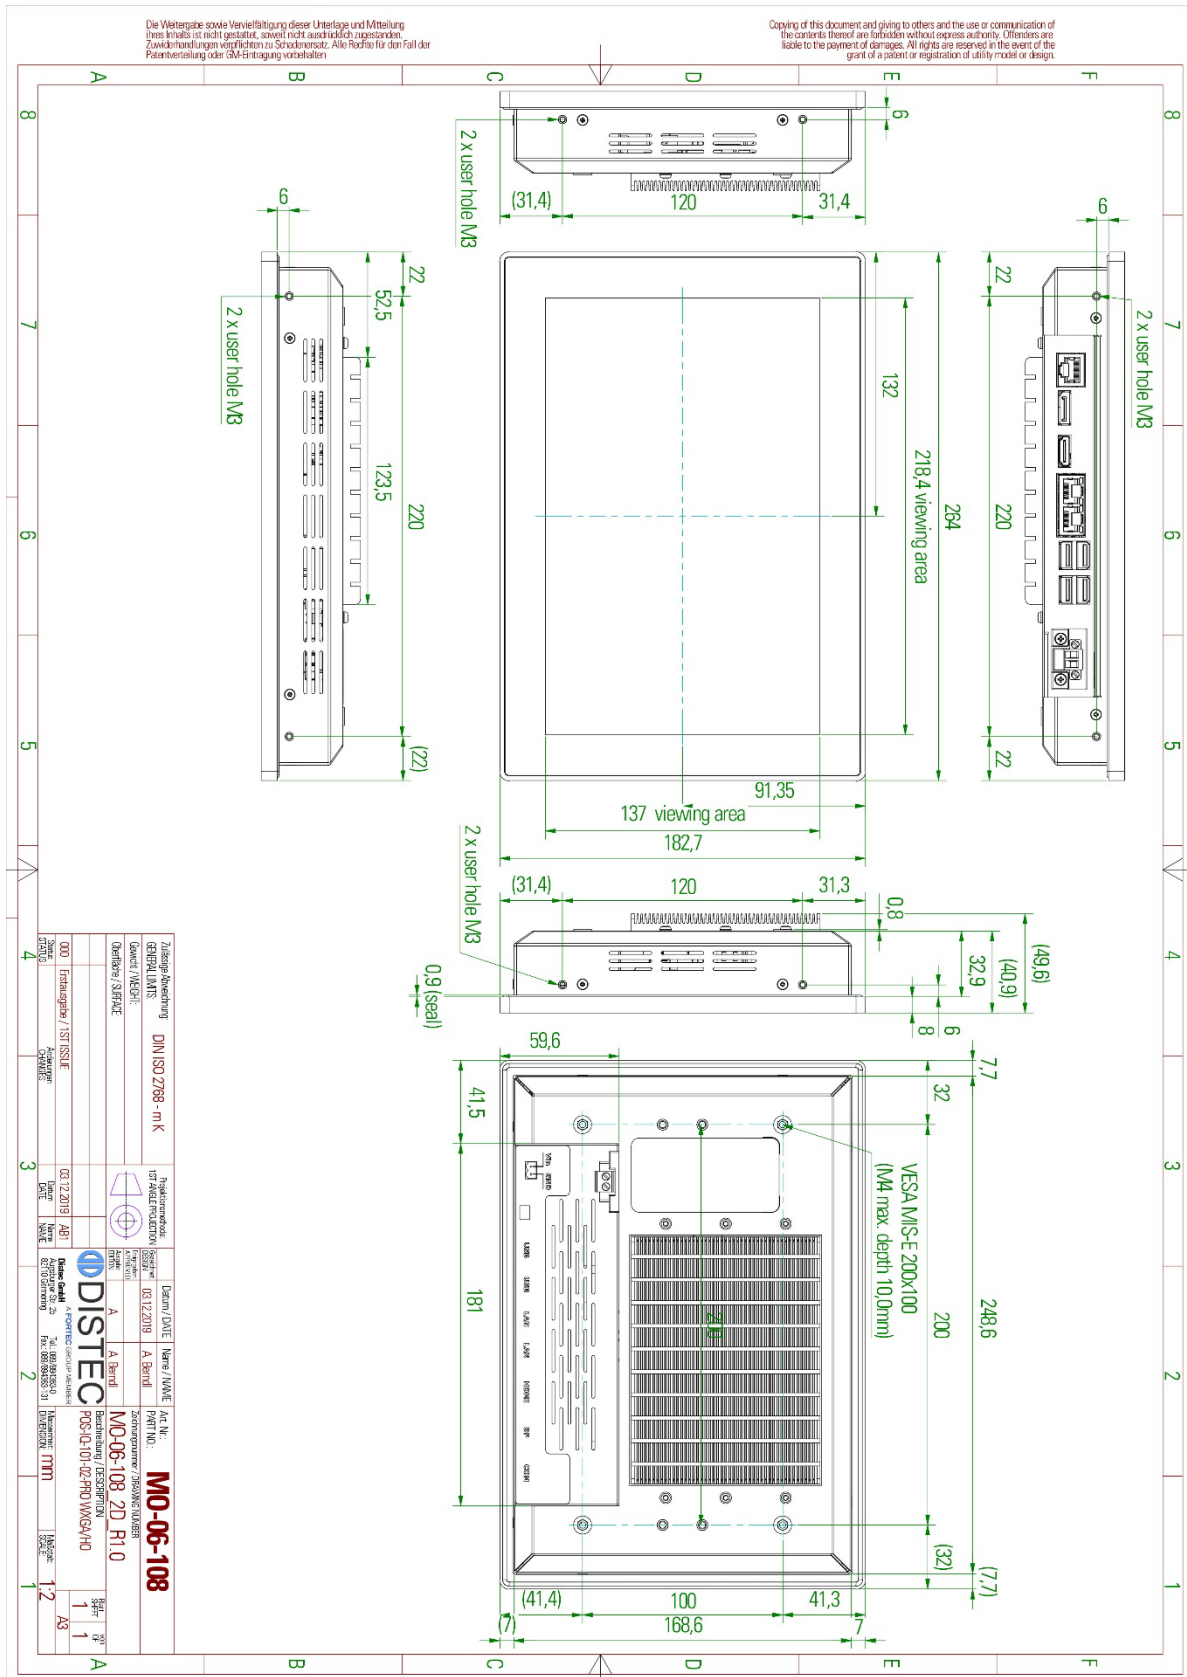

## 5 Optional Accessories

### 5.1 Overview

<b>Mounting</b>		
In-Wall Mounting Frame	MK-06-002	POS-IQ-101-00-PRO In-Wall mounting Frame
<b>Power Supply Unit</b>		
PSU 12V/5A	NT-01-062	AC Adapter CWT KPL-060F-VI(C14/12V5A)2,1
Power Cord EU	DB-07-225	IEC PowerCord (EU-C13) 3x0,75 black 1,8m
Power Cord UK	DB-07-226	Power Cord (UK - C13) black 1,8m
Power Cord USA	DB-07-238	Power Cord (US-C13) black 1,8m/6 feet
<b>Other</b>		
WiFi	PC-05-071	DELOCK 12462 WLAN Stick/Antenna USB 2.0





## 5.2.1 Mounting instruction

**The enclosed snappers must be pre-assembled on the basic unit**

2 x snapper mounted with Countersunk M4x6

11,2

**Mounting dry wall/cement**

output depth 45,0mm

251

166

mounting holes

**Mounting on plate (frontmount)**

252,7

244

170,3

251

18

9,1

9,1

mounting holes

Additional mounting options via side holes and threads

Additional mounting options via side holes and threads

rigid mounting option (no snap solution) use of distance bolts M4x12 and screws M4 (Only accessible for installation of the device from behind)

2 x snapper mounted with Countersunk M4x6

Zielgruppe/Anwendung		Produktionscode	
GENERAL LINE		157	
Smart / WEB		11.08.2019	
Hersteller / SPRINKE		A. Bernd	
DIN ISO 2768 - mK		Datum/DATE	
Produktname		Name/NAME	
A. Bernd		MK-06-002	
Zustandspalten/Produktversion		PRINT NO.	
A. Bernd		X00 MK-06-002 2D R1.0	
Distec		Produktname	
POS-IQ-101-02-PRO W&B&P&T Ind.		Produktname	
Mounting Frame		Produktname	
1		2	
2		2	
3		2	
4		2	

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecag.de](mailto:info@fortecag.de)  
Internet: [www.fortecag.de](http://www.fortecag.de)

## Fortec Group Members

### Austria



### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hinchingsbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



### Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1  
Ronkonkoma, NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)