



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet


iBASE

IB897


3,5" Single-Board Computer with Intel® BayTrail

Atom™ E3845, E3827 or E3815 Processor,

1x LVDS, 1x DisplayPort, COMs, up to -40°..+85°C

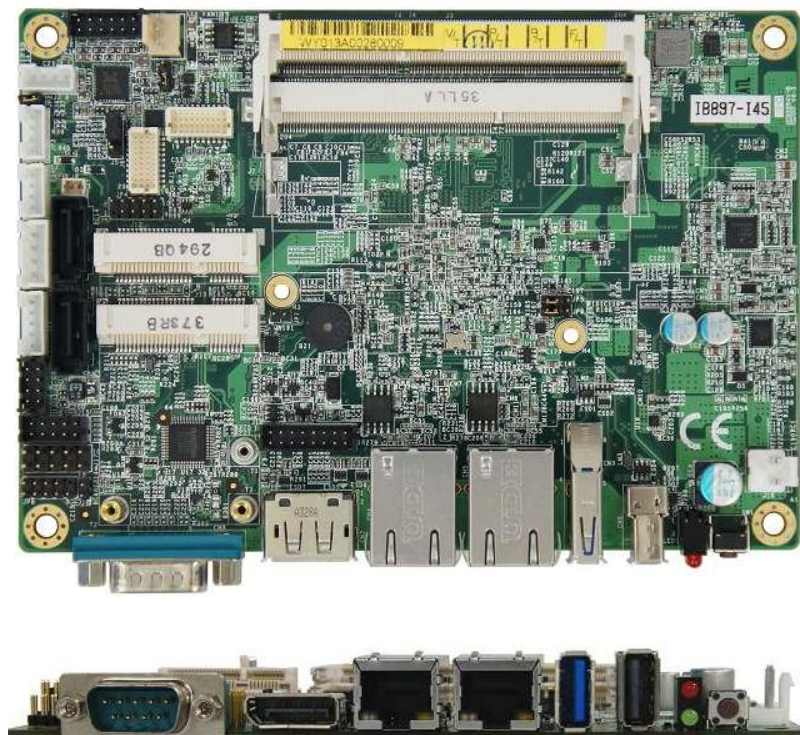

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

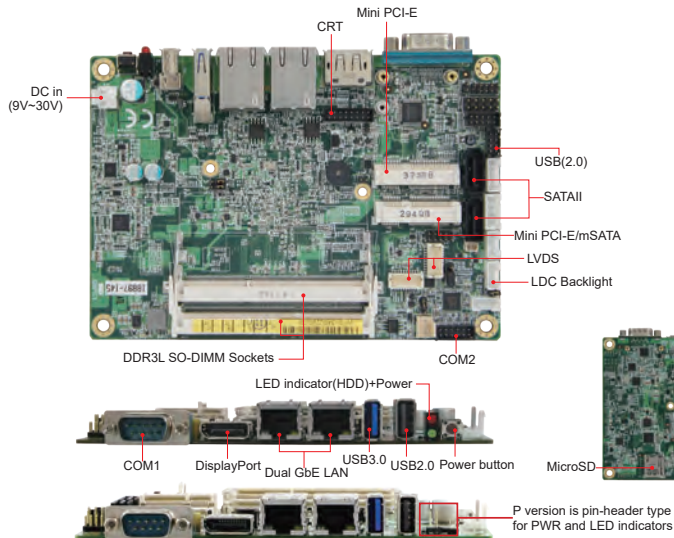

Features

- Onboard Intel® Atom™ E3845/E3827/E3815 SoC, 1.91GHz/1.75GHz/1.46GHz
- 2x DDR3L-1333 SO-DIMM, Max. 8GB
- Supports VGA, DisplayPort and 24-bit dual-channel LVDS
- 2x Intel® I210IT PCI-E Gigabit LAN
- Watchdog timer, Digital I/O, mSATA, iSMART
- 3x USB 2.0, 1x USB 3.0, 2x COM, 2x SATA II, 1x MicroSD slot
- 2x Mini PCI-E slots (1x full-size, 1x half-size)
- Wide-range operating temperature



IB897 with Heat spreader



IB897 with Heatsink


Specifications

CPU	Intel® Atom™ QC E3845 (1.91GHz, 2MB cache) Intel® Atom™ DC E3827 (1.75GHz, 1MB cache) 2nd Atom™ SC E3815 (1.46GHz, 512k cache)
PCH	Integrated in Intel® Atom™ SoC
Memory Types	2x DDR3L-1333 SO-DIMM, Max 8GB (Non-ECC) 1x DDR3L-1333 SO-DIMM, (IB897-215 only)
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	1x mSATA, 1x MicroSD
Mini Type Slots	2x Mini PCI-E (1x full-size, 1x half-size)
Graphics Controller	Intel® Atom™ SoC integrated Gen7 4EUs graphics
Video Output	Supports CRT, DisplayPort, and 24-bit dual-channel LVDS
Ethernet	2x Intel® I210IT PCI-E Gigabit LAN
I/O Chip	Nuvoton NCT5523D
Serial Port	1x RS232/422/485 (jumperless selection) 1x RS232
USB 2.0	1x USB 2.0 on board 2x USB 2.0 via pin header
USB 3.0/ 3.1	1x USB 3.0 on board
Serial ATA	2x SATA III
Audio	Intel® Atom™ SoC built-in HD Audio controller + Realtek ALC269Q HD codec w/ class-D amplifier
TPM	N/A
Others	Digital I/O, +9V~ +30V DC-In, iSMART
Dimensions (L x W)	102mm x 147mm (4" x 5.8")
Power Consumption	Intel® Atom™ E3845 @ 1.91GHz w/ 2x Transcend 2GB DDR3L-1600 + 12V: 1.57A
Operating Temperature	-40°C~85°C (-40°F~185°F)
Storage Temperature	-40°C~90°C (-40°F~194°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

IB897-I45	Intel® Atom™ E3845(1.91GHz) 3.5-inch Disk-Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I27	Intel® Atom™ E3827(1.75GHz) 3.5-inch Disk-Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I15	Intel® Atom™ E3815(1.46GHz) 3.5-inch Disk-Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I45P	Intel® Atom™ E3845(1.91GHz) 3.5-inch Disk-Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART, pin-header type for power button and LED
IB897-I27P	Intel® Atom™ E3827(1.75GHz) 3.5-inch Disk-Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART, pin-header type for power button and LED
HSIB897-BGA	Heatsink for IB897
HSIB897-BGA-1	Heat spreader for IB897
IB76	Cable kit w/ USB, COM, power, SATA + power, VGA

Dimensions and Drawing

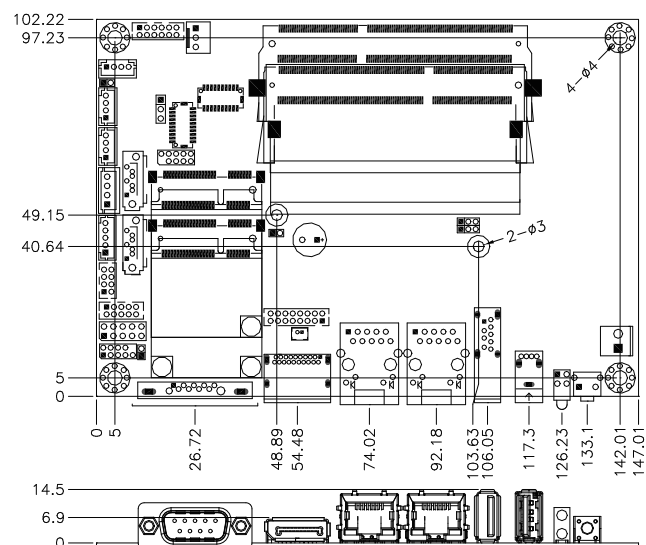

IB897 – 3,5" SINGLE-BOARD COMPUTER



BOARD / TFT-DISPLAY KITS WITH CABLES AND ACCESSORIES

Display Size	21,5" (54.61cm)
Part Number	G215HVN01.0
Manufacturer	AUO
Resolution	1920x1080
Brightness [cd/m2]	300
Backlight	LED
Converter	integrated
Viewing Angle w/h	178°/178°
Interfaces	LVDS
Dimensions mm	495.6x292.2x12.7
Touch	

Form Factor	3,5" Single-Board Computer
Manufacturer	iBASE
Part Number	IB897-145
Processor	Intel® Atom™ E3845
Memory	4GB DDR3L (optional up to 8GB)
SSD	32GB MLC mSATA (included)
Expansion Slot	2x miniPCIe (1x shared with mSATA)
Display Interface	CRT, DisplayPort
LVDS	24-bit Dual Channel LVDS
LAN	2x Gigabit LAN
SATA	2x SATA III
	1x RS232/422/485, 1x RS232
I/O	1x USB 3.0, 3x USB 2.0
	Digital I/O
Power	9V – 30V DC-in



A FORTEC GROUP MEMBER

Other configuration on request!

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC Elektronik AG

Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de



FORTEC Elektronik AG

Lechwiesenstraße 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com