



Datasheet

Distec

ITP-S4061-MA

PCAP Touch Controller

TO-02-206

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

ITP-S4061-MA



Projected Capacitive USB/I2C Touch Panel Controller

Distec launched a new touch control board to meet the latest Restriction of Hazardous Substances (RoHS) Directive. This touch panel controller provides the optimistic performance of your projected capacitive touch panels. It communicates with PC system directly through USB connector. You can see how superior the design is in sensitivity, accuracy and friendly operation. The touch panel driver emulates mouse left and right button function and supports operation systems as following.

os	Version	Interfaces	
Windows	Windows 8(Need logo submission) Windows 7 Windows Vista, XP Windows XP Tablet PC edition – Partial	USB/I2C	
Linux	The new Linux driver supports most of the Linux distribution on 32/64 bit versions, including Kernel 2.4.x / 2.6.x with XFree86 4.X / Xorg 6.7 to 7.6 (Up to X server 1.9.x) CentOS, Debian, Fedora, Gentoo, Mandrake (Mandriva), Red Hat, Slackware, SuSE (OpenSuSE), Ubuntu (Xubuntu), Yellow Dog, Android and Meego etc.	USB/I2C	
Мас	Review required specifications	USB	


Linux support table

	Kernel 2.4.X / 2.6.X with Xorg 6.7 ~7.6 (Up to X server 1.9.X)								
CentOS	Red Hat	Fedora	SlackWare	Yellow Dog	Gentoo	Mandriva	Ubuntu	OpenSuse	Debian
4.X	2.1	2.0	8.1	4.1	10.1	10.1	10.04LTS	10.2	4.X
5.X	3.X	3.0	9.0	5.0	11.0	10.2	10.1	10.3	5.X
6.X	4.X	4.0	9.1	5.0.1		2006		11.0	6.X
	5.X	5.0	10.0	5.0.2		2007		11.1	
	6.X	6.0	10.1	6.0		2008		11.2	
		7.0	10.2	6.1		2009		11.3	
		8.0	11.0	6.2		2010		11.4	
		9.0	12.0	6.2.1		2011			
		10.0	12.1	6.3					
		11.0	12.2	7.0					
		12.0	13.0						
		13.0	13.1						
		14.0	13.4						
		15.0							

The SW3718 is a MCU based integrated system controller chip for capacitive touchscreen, working only for Projected Capacitive Touchscreen (PCAP/PCT) touch technology. It works with one chip ASIC for Projected capacitive touchscreen. This chip design is scalable for different sizes, numbers of sensing channels of projected capacitive sensors.

ITP-S4061-MA

Dimension:

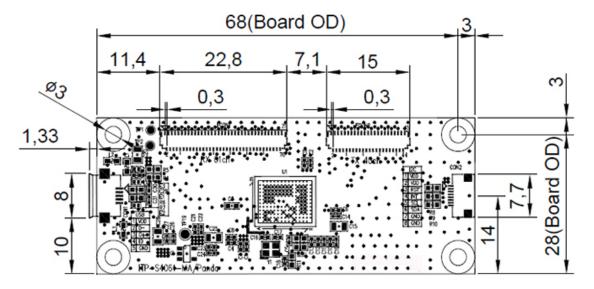

Thickness:

Total thickness: 3.8mm ± 0.2mm

(Including PCB: 1.0mm.USB connector: 2.8mm)

Specifications:

USB & I2C Type Controller					
Circuit Board Dimension	68mm x 28mm				
Power Requirements	D.C.+5V (150mW Power supply)				
Operating Temperature	-30 to 70 ℃				
Storage Temperature	-40 to 85 ℃				
Relative Humidity	95% at 60 $^\circ\!$				
Interface	USB : 2.0 Full Speed (12Mbit/s) I2C : 400kHz				
Resolution	4096×4096 resolution				
Report rate	Max. 100Hz(10 finger touch)				

Product Package:


- (1) ITP-S4061-MA (PCAP USB/I2C control board)
- (2) Micro 5 pin usb cable

ITP-S4061-MA


Upper View:



USB Connector & Pin Assignment:

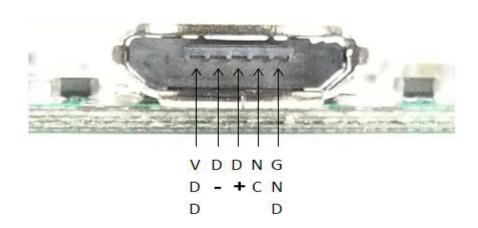

I2C Connector & Pin Assignment:

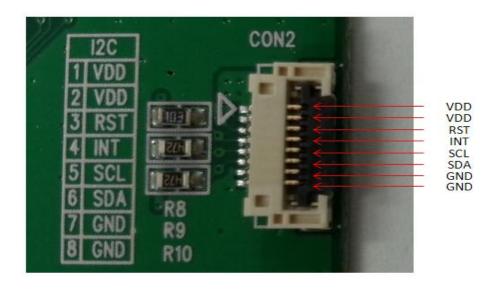



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany





FORTEC Elektronik AG

Lechwiesenstr. 9 86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria





FORTEC Elektronik AG

Office Vienna

Nuschinggasse 12 1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany





Distec GmbH

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland





ALTRAC AG

Bahnhofstraße 3 5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom





Display Technology Ltd.

5 The Oaks Business Village Revenge Road, Lordswood Chatham, Kent, ME5 8LF

Phone: +44 1634 672755

E-Mail: <u>info@displaytechnology.co.uk</u> Internet: <u>www. displaytechnology.co.uk</u>

USA





Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com