


Datasheet

DMC Co. Ltd. **DUS6100**

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

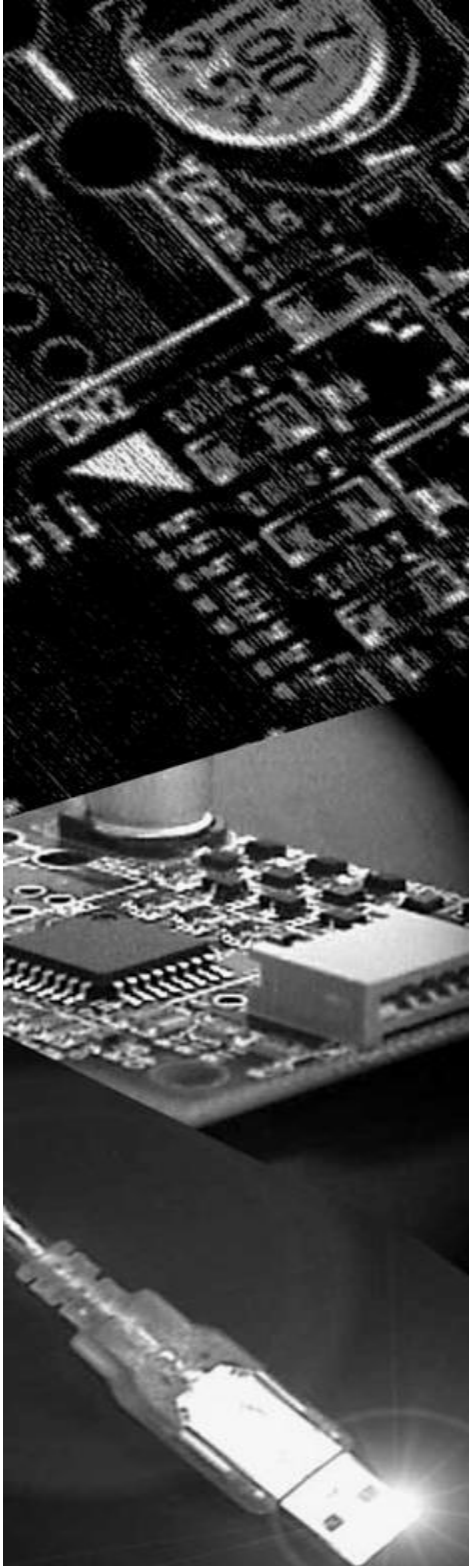

DMC Co., Ltd.

**Controller Board for Projected Capacitive Touch Screen
DUS6100 Product Specification**

Table of Contents

1. Applicable Product	2
2. Product Specification	2
2-1. Touch Screen Board Specification	2
2-2. Host Interface	3
2-3. Electrical Specification	3
2-3-1. Maximum Absolute Rating	3
2-3-2. DC Characteristics	3
2-4. Connector Pin Assignment	4
2-4-1. Connector Information	4
2-4-2. Connector Terminal	4
3. Precautions	5
4. Change History	5
5. Warranty	6
5-1. Warranty Period	6
5-2. Warranty Target	6
5-3. Warranty Exceptions	6
6. Precautions for Use	7
6-1. General Handling	7
6-2. Others	7
Outline Dimensional Drawing	

1. Applicable Product

This specification sheet is applied to DUS6100 touch screen controller board.

2. Product Specification

2-1. Touch Screen Board Specification

Item		Spec	Remark
Touch Detection Principle		Projected Capacitive	
Host Interface		USB Full Speed	
Input Power-supply Voltage		5[V]±5[%]	
Driving Voltage		18V	
Operating Temp		-20 [°C] to 85 [°C]	No dew condensation
Storing Temp		-40 [°C] to 85 [°C]	No dew condensation
Main IC		MCU 1 [pcs]	
		Sensor IC 5 [pcs]	
Number of Electrodes	Electrode (X)	159	
	Electrode (Y)	106	
Coordinate Performance	Maximum Coordinate Number to Output	10 [Finger]	
	Report rate (1 finger)	100 [Hz]	*2
	Report rate (2 finger)	100 [Hz]	*2
	Report rate (2 finger at same axis)	100 [Hz]	*2
	Electrode resolution	256 [1/Electrode]	
	2 finger minimum distance (X)	3.5 [Electrode]	21[mm] @ 6[mm]◇
	2 finger minimum distance (Y)	3.5 [Electrode]	21[mm] @ 6[mm]◇
	Coordinate Accuracy (1 finger: high accuracy area)	max ±0.25 [Electrode]	≒1.5[mm] @ 6[mm]◇ *1
	Coordinate Accuracy (2 fingers: high accuracy area)	max ±0.50 [Electrode]	≒3.0[mm] @ 6[mm]◇ *1
	Coordinate Accuracy (1 finger: low accuracy area)	max ±0.75 [Electrode]	≒4.5[mm] @ 6[mm]◇ *1
	Coordinate Accuracy (2 fingers: low accuracy area)	max ±1.00 [Electrode]	≒6.0[mm] @ 6[mm]◇ *1
	Low accuracy area	3 [Electrode]	Specify area from the edge
Low Power Mode		Active / Suspend	
Calibration	Calibration function	Support	
	Calibration Time	Max 30 [sec]	*2

*1. The indicated coordinate accuracies are performances under a noise-free environment. The accuracy may significantly drop due to extrinsic noises.

*2 The indicated values depend on software noise filter and CR values of the sensor glass. This specification is of the operation by normal clock scan.

2-2. Host Interface

USB Interface

Item	Value	Note
Host Interface	USB 2.0 Full speed 12[Mbps]	
Power supply	Bus-powered	
Power type	Low power device	Under 100mA
VendorID/ProductID	0x0AFA / 0x07D5 (At firmware update: 0x0AFA / 0x07D4)	
Power save mode	USB Suspend mode (compliant to USB specification)	

2-3. Electrical Specification

2-3-1. Maximum Absolute Rating

Item	Specifications			Unit	Note
	Min.	Typ.	Max.		
Touch Panel Power Supply	-0.3		6	V	

2-3-2. DC Characteristics

Board Consumption Current

Test Condition : TA = 25°C, VCC = 5V

Item	Specifications			Unit	Note
	Min.	Typ.	Max.		
Touch Panel Power Supply	4.75	5	5.25	V	
Normal operation mode		270		mA	
Suspend mode		20		mA	

USB Signal (D+, D-) DC Characteristics

Parameter	Specifications			Unit	Note
	Min.	Typ.	Max.		
Input High Voltage	2.0		-	V	
Input Low Voltage	-		0.8	V	
Output High Voltage	2.8		3.6	V	
Output Low Voltage	0		0.3	V	

2-4. Connector Pin Assignment

2-4-1. Connector Information

Connector Number	Model Number	Maker
CN1	SM06B-SRSS-TB	JST
CN7	FH28D-55S-0.5SH	HIROSE
CN8	FH28D-55S-0.5SH	HIROSE
CN9	FH28D-55S-0.5SH	HIROSE
CN10	FH28D-55S-0.5SH	HIROSE
CN11	FH28D-55S-0.5SH	HIROSE

2-4-2. Connector Terminal

Connector Number	Terminal Number	Terminal Name	Description
CN1	1	VBUS	
	2	D-	
	3	D+	
	4	GND	
	5	RESERVE	
	6	GND	
CN7			Connector for touch sensor, 55 pins
CN8			Connector for touch sensor, 55 pins
CN9			Connector for touch sensor, 55 pins
CN10			Connector for touch sensor, 55 pins
CN11			Connector for touch sensor, 55 pins

3. Precautions

Operation may become unstable, depending on the surrounding environment.

Do not use the controller under environments that affect capacitance values (The affecting factors are such as power-supply noises).

The application tool, TPOffset must be executed before operating DMC's touch screens of capacitive multi-touch type (EXC series and DUS series) with the DUS series controller.

TPOffset is the application software executable on Windows. It can be downloaded from the DMC's website below.

DMC's website: TPOffset download page

<http://www.dmccoltd.com/english/download/tpoffset.asp>

4. Change History

Ver0.1 (July 29, 2015))

Tentative specification was issued.

Ver0.2 (December 17, 2015)

2-1. Touch Screen Board Specification

Information of driving voltage was added.

Ver1.0 (April 1, 2016)

First edition release

2-1. Touch Screen Board Specification The note[*2] regarding Report Rate was changed.

This specification is of the operation by 250KHz clock scan

→This specification is of the operation by normal clock scan

2-2. Host Interface The description of USB Power Type was changed.

Low power device → High Power Device

2-3-2. DC Characteristics Board consumption current of Normal operation mode and Suspend mode were added.

3. Precautions The description about how TPOffset tool is provided was changed.

Please contact DMC Sales Department for the tool.

→It can be downloaded from the DMC's website below.

5. Warranty

5-1. Warranty Period

- § The warranty period is limited to 1 year from the date of shipping. The warranty for the initial deflection such as appearance deflection is limited to 1 month.
- § Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the deflection is considered to be caused by the supplier.
- § The replacement is subject to be included in the next lot.

5-2. Warranty Target

- § The warranty only covers the product itself and does not cover any damage to others caused by using this product. Onsite repair or replacement is not supported.
- § We will do our best for delivery problem and product defections, but the warranty for the production line is not covered.

5-3. Warranty Exceptions

Following conditions are not covered with the warranty and subject to charge.

- § Any malfunctions and damages during transportation and transfer by the user.
- § Any malfunctions and damages caused by a natural disaster or a fire.
- § Any malfunctions and damages caused by static electricity
- § Any malfunctions and damages caused by the failure of the associated equipment.
- § If the product is remodeled, disassembled or repaired by the user.
- § If the product is glued onto the equipment and uninstalled.
- § Any malfunctions and damages caused by an improper usage and handling against the specifications and notes.

6. Precautions for Use

6-1. General Handling

- § Keep the product away from any conductive objects while in use.
- § Do not touch the conductive part of the product to avoid being damaged by the electrostatic discharge. Follow the proper procedure for handling.
- § Keep the product in the proper storing environment and avoid any load to the product.
- § Do not use or store the product in the severe condition like following:
Wet environment or a condition where the product is likely to get wet. Where dew condensation is likely to occur. Near solvent or acid.
- § Do not take apart or alter the product.

6-2. Others


- § The contents of this document are subject to change without notice.
- § The manufacturer or sales representatives will not be liable for any damages or loss arising from use of this product.
- § This product is intended for use in standard applications (computers, office automation, and other office equipment, industrial, communications, and measurement equipment, personal and household devices, etc.) Please avoid using this product for special applications where failure or abnormal operation may directly affect human lives, or cause physical injury or property damage, or where extremely high levels of reliability are required (such as aerospace systems, vehicle operating control, atomic energy controls, medical devices for life support, etc.).
- § Any semiconductor devices have inherently a certain rate of failure. The user must protect against injury, damage, or loss from such failures by incorporating safety design measures into the user's facility and equipment.

DUS6100 Product Specification
Ver1.0 issued on April 1, 2016
©2016 DMC Co., Ltd.

This document can be freely distributed, but any alternation to this document is prohibited.



DMC Co., Ltd.
<http://www.dmccoltd.com/english/>
11F Takanawa Sengakuji Ekimae Bldg., 2-18-10 Takanawa, Minato-ku, Tokyo 108-0074, Japan
Phone: +81-3-6721-6731 (Japanese), 6736 (English) Fax: +81-3-6721-6732

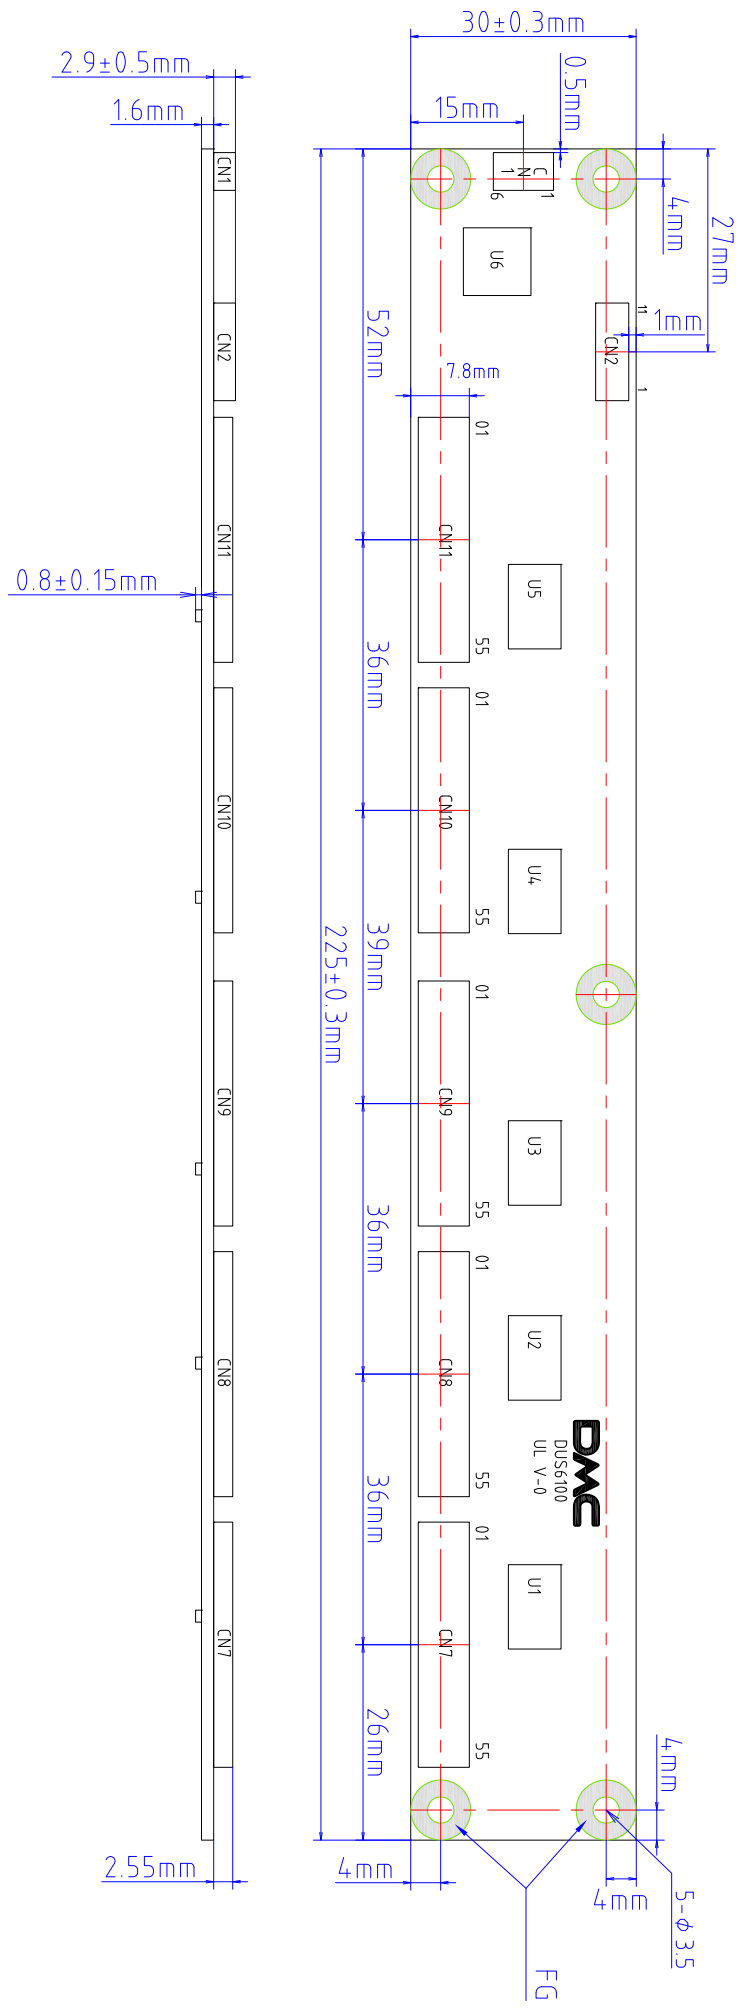

Date	P/N
July 28, 2015	DUS6100
Dimensional Drawing	
DMC Co., Ltd.	Rev.
	1

Our company network supports you worldwide with offices in Germany, Great Britain, Turkey and the USA.
For more information please contact:



DATA DISPLAY GROUP

A **FORTEC** GROUP MEMBER

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom
Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@displaytechnology.co.uk
Internet: www.datadisplay-group.com

Sales Partner:

DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ

Barbaros Mh. Ak Zambak Sk. A Blok D:143
34376 Ataşehir / Istanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr

FORTEC Elektronik AG

Lechwiesenstr. 9
86899 Landsberg am Lech
Germany

Phone: +49 (0)8191 / 911 72-0
Fax: +49 (0)8191 / 217 70
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779
United States of America
Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com