
Datasheet

CWT

KPL-060F-VI (2.1)

NT-01-062

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



Table of Contents

1	SCOPE	5
2	ELECTRICAL SPECIFICATION	5
2.1	INPUT REQUIREMENT	5
2.1.1	Input voltage range.....	5
2.1.2	Input frequency range.....	5
2.1.3	AC inrush current.....	5
2.1.4	Input current	5
2.1.5	Leakage current	6
2.1.6	Insulation resistance	6
2.1.7	Low power consumption.....	6
2.2	INPUT PROTECTION	6
2.2.1	Input current protection	6
2.3	OUTPUT REQUIREMENT	6
2.3.1	Output power	6
2.3.2	Output voltage and current.....	6
2.3.3	Ripple and noise.....	7
2.3.4	Over voltage protection	7
2.3.5	Over current protection.....	7
2.3.6	Overshoot.....	7
2.3.7	Short circuit Protection	7
2.3.8	Audible noise.....	8
2.4	PERFORMANCE REQUIREMENT	8
2.4.1	Efficiency.....	8
2.4.2	Turn on delay time	8
2.4.3	Hold-up time	8
2.4.4	Dynamic load.....	8
3	ENVIRONMENTAL SPECIFICATION	8
3.1	TEMPERATURE	8
3.2	HUMIDITY	9
3.3	VIBRATION AND SHOCK.....	9
3.4	ALTITUDE.....	9

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 3 of 11	



3.5	CALCULATED MEAN TIME BETWEEN FAILURES (MTBF)	9
3.6	BURN-IN	9
4	RELATED SPECIFICATION	10
4.1.1	EMI	10
4.1.2	Dielectric strength—(Hi-pot).....	10
4.1.3	Surge	10
4.1.4	Electrostatic discharge ESD	10
4.1.5	RF Immunity.....	10
4.1.6	Environment standards	11
4.1.7	Electrical Fast Transients (EFT).....	11
5	MECHANICAL	11
5.1	INPUT CONNECTOR AND OUTPUT CABLE	11
5.1.1	Input connector	11
5.1.2	Output cable.....	11
5.2	AC ADAPTER EXTERNAL DIMENSION.....	11

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 4 of 11	



1 SCOPE

This document describes basic electrical characteristics and mechanical characteristic of **60 W** power adapters.

2 ELECTRICAL SPECIFICATION

2.1 INPUT REQUIREMENT

2.1.1 INPUT VOLTAGE RANGE

Industrial power supply shall operate within input specification from 90Vac to 264Vac or provide automatic switching between high line and low line input ranges. The table below shows common input voltage range.

Input Range	Minimum	Nominal	Maximum	Unit
	90 V	100V- 240V	264V	Vac Rms

Table 1 - Input Voltage Range

2.1.2 INPUT FREQUENCY RANGE

The industrial power supply shall operate within specification from 47 to 63 Hz.

2.1.3 AC INRUSH CURRENT

Peak inrush current should not exceed 100 A at 240Vac, 50Hz, 25 degrees C, cold start. It should not interrupt line fuse or cause damage to the industrial power supply either at cold or warm start.

Peak inrush current should not exceed 50 A at 100Vac, 60Hz, 25 degrees C, cold start. It should not interrupt line fuse or cause damage to the industrial power supply either at cold or warm start.

The inrush current must be limited to the extent that no damage is done to the supply under any specified line, load, and temperature conditions. The inrush current shall not cause any external protection devices (i.e. fuses) to trip.

2.1.4 INPUT CURRENT

Maximum steady state input current shall not exceed 1.7 A for any line voltage specified in 2.1.1.

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 5 of 11	



2.1.5 LEAKAGE CURRENT

0.75mA maximum at 240Vac 50Hz

2.1.6 INSULATION RESISTANCE

Insulation resistance shall be more than 50M ohm between primary and secondary.

2.1.7 LOW POWER CONSUMPTION

Vin	Load	Power consumption
240Vac/50Hz 100Vac/60Hz	0A	≤ 0.15 W

2.2 INPUT PROTECTION

2.2.1 INPUT CURRENT PROTECTION

A fuse with rating of 3.15 A / 250 V (Time Lag type) shall be installed on the input line side near the input connector and no any electrical components before.

2.3 OUTPUT REQUIREMENT

2.3.1 OUTPUT POWER

The total output power, under steady state conditions, shall not exceed 60 W.

2.3.2 OUTPUT VOLTAGE AND CURRENT

Under any combination of line and load variation and environmental conditions, all outputs shall remain within tolerance as defined in Table 2. Output voltage(s) shall be measured at the load side of output connector.

Output Voltage	Voltage Range		Current Range		
	Lower Limit	Upper Limit	Minimum Load	Full rated load	PK Load
+12.0V	11.40V	12.60V	0.0A	5.0A	--

Table 2 - Output Voltage and Current

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 6 of 11	



2.3.3 RIPPLE AND NOISE

Measurements shall be made with an oscilloscope with minimum of 20MHz bandwidth and 1:1 scope Probe, Output shall be bypassed at the connector with a 0.1 μ F ceramic disk capacitor and a 47 μ F electrolytic capacitor for general testing purpose.

Output Voltage	Maximum Ripple & Noise (Vp-p)
+12.0V	240mV

Table 3 – Ripple and Noise

2.3.4 OVER VOLTAGE PROTECTION

The power supply shall provide with over voltage protection such that under any single component failure.

The power supply provides output over voltage protected in latch off by zener diode, and no damage to customer device.

2.3.5 OVER CURRENT PROTECTION

The power supply shall be protected when operating any output in overload condition. The power supply shall be shut down and no any damage when the over current condition occurs on the output, and It will be auto-recovered when the failure is removed.

Output Voltage	Over current protection		Test condition
	Lower Limit	Upper Limit	Input voltage:100Vac 60Hz or 240Vac 50Hz.
+12.0V	5.80A	9.00A	

Table 4 –Over current protection

2.3.6 OVERSHOOT

During turn on or turn off, the output overshoot shall not exceed nominal output voltage by more than 5%, and output shall not change its polarity with respect to its return line.

2.3.7 SHORT CIRCUIT POTECTION

Power supply shall have self-limiting protection to protect against short circuit or overload conditions. No damage to the power supply shall result from a continuous or intermittent short circuit condition. It will be auto-recovered when the failure is removed.

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 7 of 11	



2.3.8 AUDIBLE NOISE

There is no audible noise canned been heard when it work with rated spec.

2.4 PERFORMANCE REQUIREMENT

2.4.1 EFFICIENCY

Efficiency (watt out / watt in) shall be a minimum of 89 % at active average mode.

Complies to EPA standard Version 5.0 Energy Star EPS specification (Level VI).

calculate the model is single average active mode efficiency for each test voltage by testing at 100%,75%,50%,and 25% of rated current output and then computing the simple arithmetic average of these four values respectively at 115V/60HZ and 230V/50HZ test result for reference.

Efficiency (watt out / watt in) shall be a minimum of 79 % at 10% full load.

Note: when testing efficiency, adapter needs to electrify to perform after full load 30 minutes

Input voltage 115Vac 60Hz or 230Vac 50Hz

2.4.2 TURN ON DELAY TIME

Output shall reach steady state within 3 seconds of turn on at 100Vac or greater.

2.4.3 HOLD-UP TIME

Hold-up time shall be a minimum of 8 mS at 100Vac / 60Hz input.

2.4.4 DYNAMIC LOAD

Power supply output voltage tolerance shall be complied with $\pm 5\%$.

Step load change: from 50% to100% Load on the output.

Dwell Time: 100Hz & 1 KHz 50% duty.

Slew rate: 0.5A/uses

3 ENVIRONMENTAL SPECIFICATION

3.1 TEMPERATURE

Operation within specification: -10 to 45 degrees C.

Storage: -20 to 85 degrees C

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 8 of 11	



3.2 HUMIDITY

Operation: 10% to 90% relative humidity, non-condensation.

Storage: 5% to 95% relative humidity, including condensation.

3.3 VIBRATION AND SHOCK

The power supply shall be designed to withstand normal transportation vibration per MIL-STD-810F, method 514 and procedures X, as it is mounted in the chassis assembly and packed for shipping.

3.4 ALTITUDE

The power supply shall operate properly at any altitude between 0 ~ 16,404 feet (5000 meter) above sea level, and withstand storage at 50,000 feet.

3.5 CALCULATED MEAN TIME BETWEEN FAILURES (MTBF)

The MTBF for the power adapter shall equal or exceed **100,000** hours when operated at full rated load in an ambient temperature of 25 degree C.

3.6 BURN-IN

Burn-in test:

Test condition: 110Vac / 220Vac 50Hz, with 100% maximum load at 45 ±5°C ambient temperature.

Test method: burn-in 110 minutes; and 30 seconds "ON", 30 seconds "OFF" within 5 minutes, then 5 minutes "ON"

Test criteria: during this conditioning the power supply output normal and no damage or hazardous condition will occur.

ORT and life test:

Input condition: 110Vac / 220Vac 50Hz, "ON/OFF" 10 times within 5 minutes, 45 minutes "ON"
45 minutes "OFF",

Test condition: cycle by cycle test 168 hours with 100% maximum load at 45 ±5°C ambient temperature.

Test criteria: during this conditioning the power supply output normal and no damage or hazardous condition will occur.

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 9 of 11	



4 RELATED SPECIFICATION

4.1.1 EMI

VCCI Class-B

FCC 15(Class-B, 115Vac operation)

CISPR 22 Class-B limits

EN55022 (1998+A1:2000+A2:2003 Class-B limits)

47 CFR Part 15, Subpart B, Class B limits

GB 9254 ITE Emissions Latest Edition

4.1.2 DIELECTRIC STRENGTH—(HI-POT)

Primary to secondary: **1500VAC.**

Test time: 60 second

Cut-off current: 5mA max

Arcing current: 10mA max

4.1.3 SURGE

It is referring to EN61000-4-5 IEC61000-4-5:2001 Level 4.

Differential mode surge immunity: 2KV

Common-mode Surge Immunity: 4KV

* **Determination level: Criteria A (Product testing and testing before and after any change in function is not).**

4.1.4 ELECTROSTATIC DISCHARGE ESD

It is referring to EN61000-4-2, IEC61000-4-2:2001, IEC801-2 Level 3.

Contact electrostatic discharge: + - 6KV.

Air electrostatic discharge: + - 8KV.

* **Determination level: Criteria A (Product testing and testing before and after any change in function is not).**

4.1.5 RF IMMUNITY

It is referring to IEC61000-4-3 Class A 3V/m

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 10 of 11	



4.1.6 ENVIRONMENT STANDARDS

RoHS Regulation

The RoHS compliance symbol will be included on the data plate.

4.1.7 ELECTRICAL FAST TRANSIENTS (EFT)

It is referring to IEC61000-4-4 Class B Test Voltage: 2KV

5 MECHANICAL

5.1 INPUT CONNECTOR AND OUTPUT CABLE

5.1.1 INPUT CONNECTOR

AC Input connector shall be IEC320 C14 power connector.





5.1.2 OUTPUT CABLE

The output cable shall be [UL1185#16AWG 1500 +/- 20mm](#).

5.2 AC ADAPTER EXTERNAL DIMENSION

ISSUE DATE: 2014/09/20	Revision No.: 1.0	
Specification No:	Page: 11 of 11	

版本	修訂內容	修訂者	日期
0.1	新製	yw.wang	2017.03.07





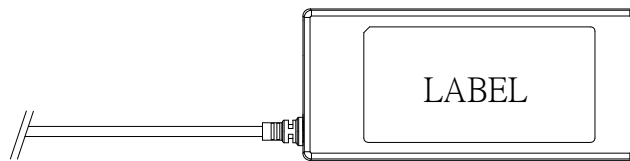
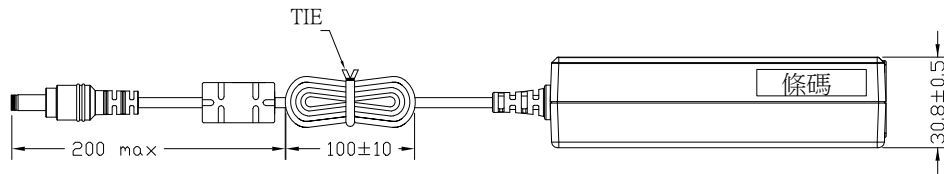
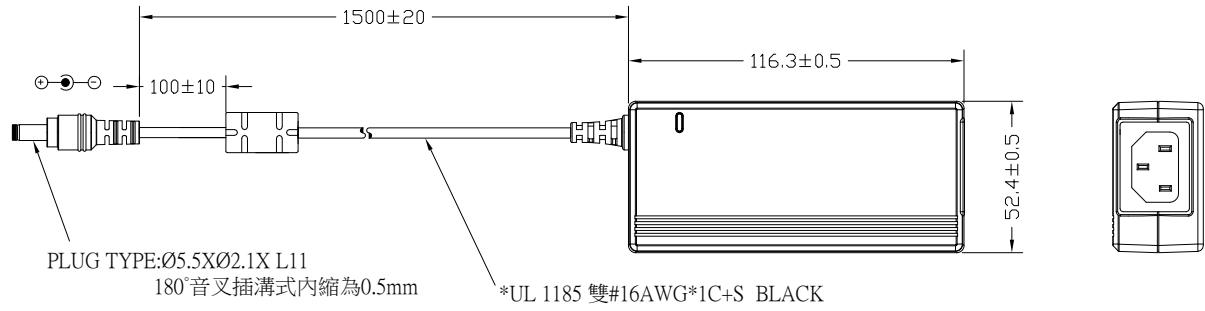


VIEW "A"
(SCALE 3:1)

NOTES:

1. CASE & CABLE COLOR : BLACK
2. CABLE SPEC.:CABLE ARE UL 1185 雙#16AWG*1C+S BLACK
3. MODEL:G99-KPL060F-L083
4. PART NO.:G18-B1A215A-MP00

	APPROVED	DRAWING NO.	UNIT	REV.
	yw.wang	KP-L-C14	INCHES(MM)	A
TITLE	DATE	MODEL NO.	TOLERANCES:	SHEET
Desktop Switching Adapter	2017.03.07	KPL	.X = ±0.2 .XX = ±0.15	1/1

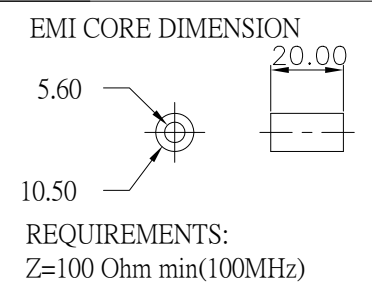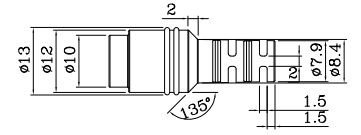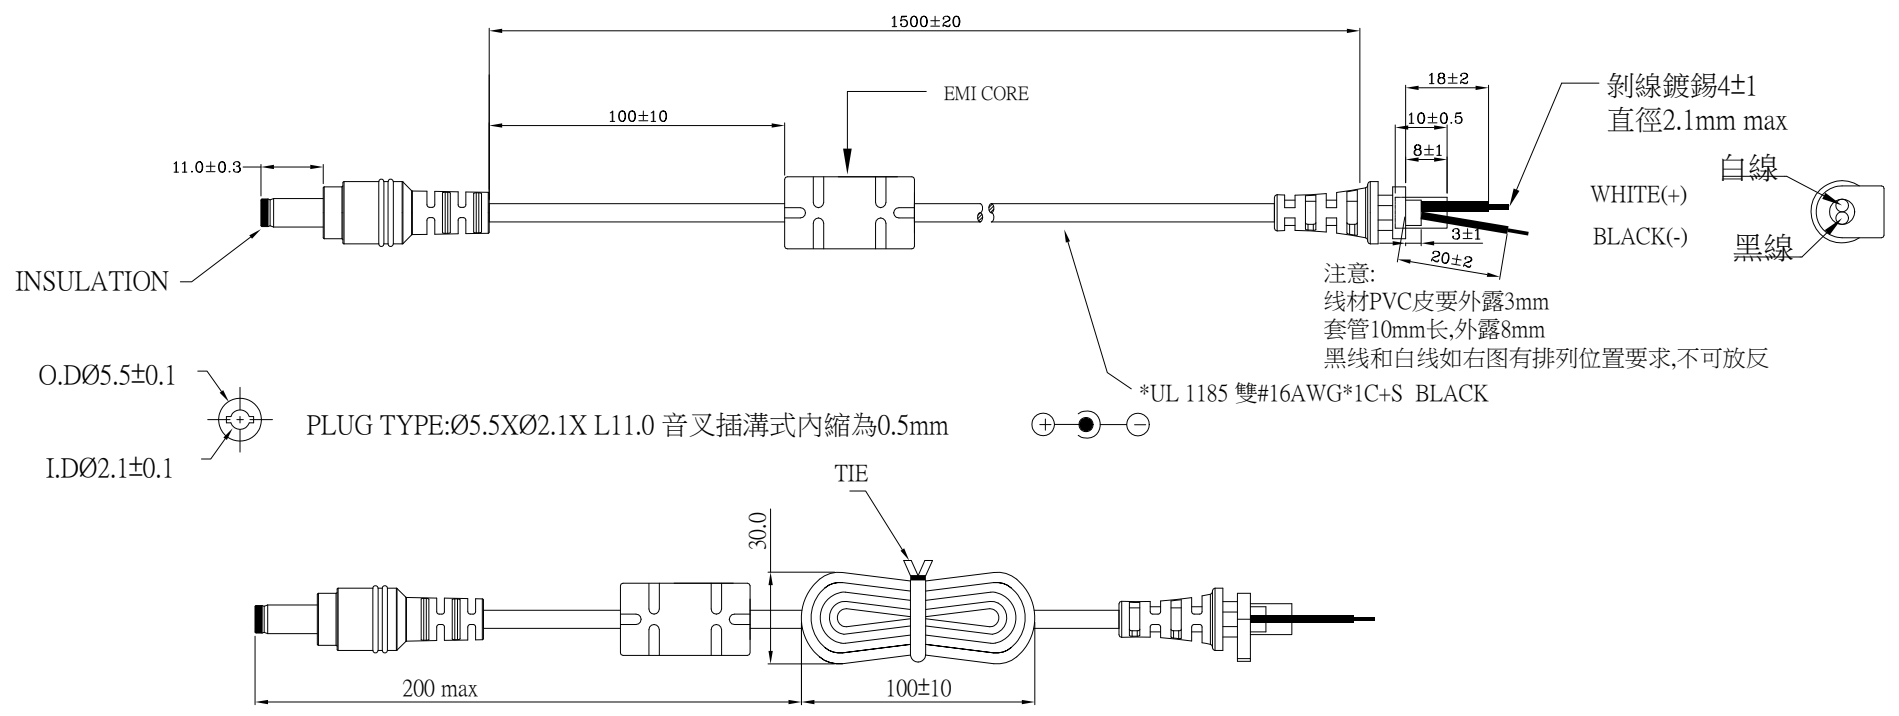

環保材料標準:

No	有害物質名稱	含量標準	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)			單重 : g	在G18-B3A212A-M800的基礎上DC頭改為5.5*2.1*11L,線材改為1500mm			
1	鎘 (Cd)	<75ppm	DIMENSION	PIERCING	BENDING	ANGULAR	0.1	REV.		
2	鉛 (Pb)	<800ppm					DESCRIPTION			
3	汞 (Hg)	<800ppm	X < 8	±0.1	±0.15	±0.3°	UNIT: mm	MODEL NO.: KPL***		
4	六價鉻 (Cr) ⁶	<800ppm	8 ≤ X < 25	±0.1	±0.2	±0.5°		MATERIAL	PART NO.: G18-B1A215A-MP00	
5	多溴聯苯 (PBB)	<800ppm	25 ≤ X < 100	±0.15	±0.25	±0.5°		DESIGNED	DRAWING NO.:	
6	多溴二苯醚 (PBDE)	<800ppm	100 ≤ X < 300	±0.2	±0.3	±1°	APPROVED	CHECKED	DESIGNED	
7	鎘,鉛,汞,六價鉻(包裝材料)	總含量<100ppm	300 ≤ X < 800	±0.3	±0.5	±1.5°	DATE: 2016.09.20	DATE: 2016.09.20	DATE: 2016.09.20	

僑威科技

APPROVED

j.t.gong

DATE: 2016.09.20

CHECKED

q.liu

DATE: 2016.09.20

DESIGNED

yw.wang

DATE: 2016.09.20

SCALE:

THIRD ANGLE PROJECTION

SHEET 1 OF 1

M/A4 L




MODEL No.: KPL-060F-VI

料號: G35-D018556-P200

REV: B

工作要點

- 1.材質: 100#消銀龍+OPP(UL安規) (厚度0.12~0.15mm)
- 2.SIZE:79.5*39.5mm(+0/-0.2mm)
- 3.顏色:參照圖檔.
- 4.印刷字體大小,位置,內容詳見drawing.
- 5.印刷必須清晰不得有斷線,模糊不清等不良現象.
- 6.背膠必須耐溫80 C,2H不會產生翹起,起泡等不良現象.
- 7.請參照RoHS and REACH環保標準生產.
- 8.UL必須符合PGDQ2.
- 9.最小包裝上必須有廠商名稱或LOGO,產品名稱,產品型號,規格, UL Mark以及UL Number.

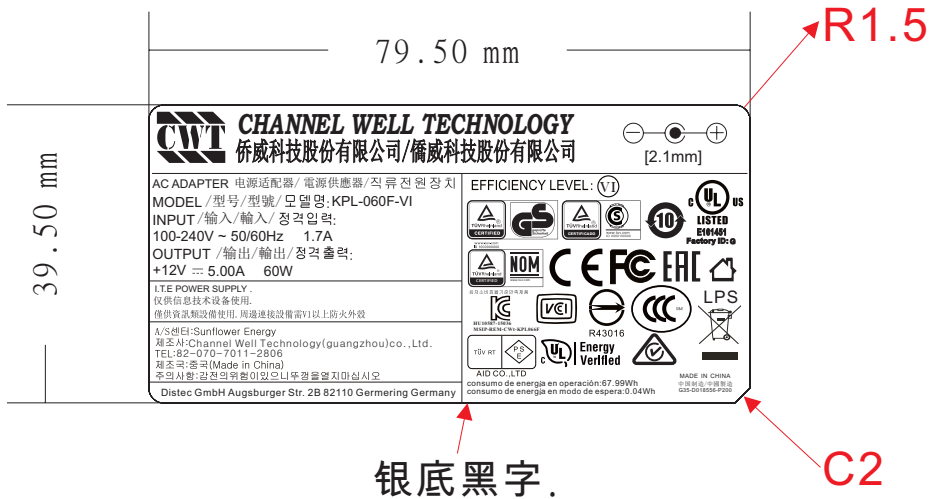

ISSUE BY:

王艷麗

CHECK BY:

宋書軍

APPROVED:

宋書軍

1

2

3

4


5

6

STEP1:將成品及線材整理如下圖,






STEP2:將成品放入PE袋內如下圖,




4

STEP3:將成品如圖般放入格板內

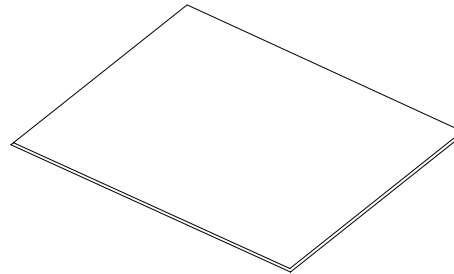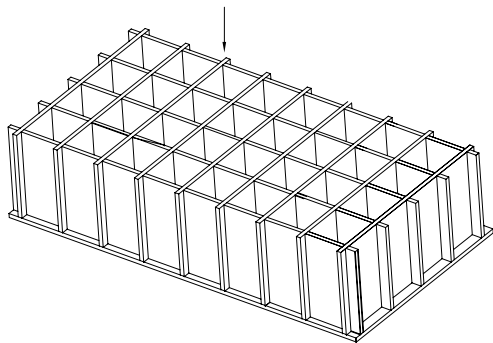

1

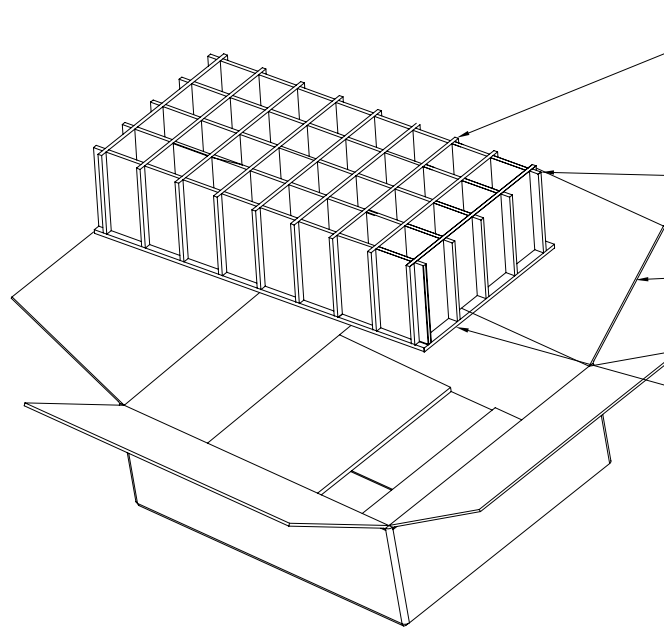

2

3

5

1

1.組件:

1.1.:天地板:390*390mm
用量:2PCS1.2.:五刀卡: 390*150mm
用量:9PCS1.3.:九刀卡: 390*150mm
用量:5PCS1.4.:PE袋:250*130mm
用量:32PCS1.5.:外箱:408*405*176mm
用量:1PCS外箱尺寸 408*405*176mm
Q'TY.: 32 PCS

環保材料標準:

No	有害物質名稱	含量標準	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)				0.1	DESCRIPTION		
			DIMENSION	PIERCING	BENDING	ANGULAR	REV.			
1	鎘 (Cd)	<75ppm					僑威科技	UNIT: mm	MODEL NO.: KPL	
2	鉛 (Pb)	<800ppm						MATERIAL	PART NO.: 408-405-176-01	
3	汞 (Hg)	<800ppm	X < 8	±0.1	±0.15	±0.3°		*****	DRAWING NO.:	
4	六價鉻 (Cr)	<800ppm	8 ≤ X < 25	±0.1	±0.2	±0.5°		APPROVED	CHECKED	DESIGNED
5	多溴聯苯 (PBB)	<800ppm	25 ≤ X < 100	±0.15	±0.25	±0.5°			LV LI	jh Huang
6	多溴二苯醚 (PBDE)	<800ppm	100 ≤ X < 300	±0.2	±0.3	±1°				
7	鎘,鉛,汞,六價鉻(包裝材料)	總含量<100ppm	300 ≤ X < 800	±0.3	±0.5	±1.5°		DATE:	DATE: 2012.11.21	DATE: 2012.11.21

SCALE: SHEET 1 OF 1 M/A4L
THIRD ANGLE PROJECTION

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 627255
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com