



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY




# Datasheet

## Congatec

### conga-QEVAL/Qseven 2.0

Qseven Evaluation Carrier Board for Qseven 2.0

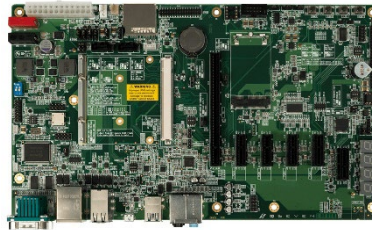


---

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# EVALUATION CARRIER BOARD

# conga-QEVAL/Qseven 2.0

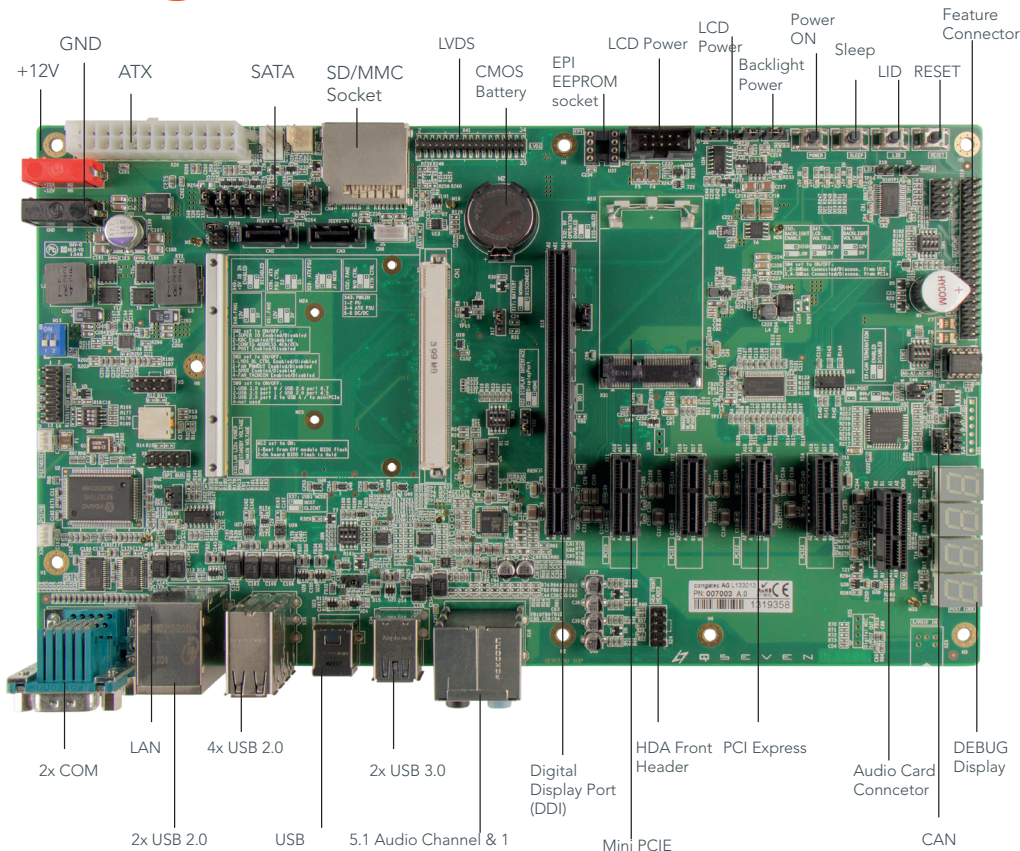

To achieve a quick start with Qseven congatec offers an evaluation carrier board, which routes all the Qseven® signals to standard interface connectors.

4x PCIe x1 / 3x PCIe x1 and mini PCIe, 1x SDIO Card Socket

Gigabit Ethernet, up to 8x USB 2.0, up to 2x USB 3.0, USB Client, 1xCAN

5.1 Audio, Microphone, Line In, optical S/PDIF Out

2x SATA

LPC POST code display, System speaker

Power button, Reset button, LID button, Sleep button

External BIOS flash

LPC header, SPI header, 3pin or 4pin FAN

I<sup>2</sup>C EEPROM, Aux. signals for battery management

1x Dual Channel LVDS, HDMI or Display Port

Backlight control

12 V single power input, ATX power input connector, CMOS battery

Temperature Operating: 0.....+60°C Storage -20...+80°C

Humidity Operating: 10...90% Storage 5...95%

Article	PN	Description
conga-QEVAL/Qseven 2.0 x86	007003	Evaluation carrier board for Qseven™ modules based on x86 architecture
conga-QEVAL/Qseven 2.0 ARM	007005	Evaluation carrier board for Qseven™ modules based on ARM architecture
conga-QKIT	077455	Qseven-Starterkit with Qseven Evaluation Carrier Board, Power Supply Unit, Flat Panel Adapter, SDVO-ADD2 Card, SATA-to-CF Adapter, LVDS-to-DVI Adapter, SATA-to-IDE 2 Adapter, Cable-Box, USB-Stick

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. February 11, 2015 MR

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecaq.de](mailto:info@fortecaq.de)  
Internet: [www.fortecaq.de](http://www.fortecaq.de)

---

## Fortec Group Members

### Austria



### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hinchingsbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



### Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1  
Ronkonkoma, NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)