



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

ADVANTECH

AIMB-588

MicroATX Motherboard with Intel® 12th Gen Core™ processors Alder Lake-S i9/i7/i5/i3 LGA1700




The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

AIMB-588

Intel® 12th Gen Core™ processors (Alder Lake-S) i9/i7/i5/i3 LGA1700, MicroATX with 2 DP/HDMI/eDP, 1 GbE LAN, 3 2.5GbE LANs, 8 USB 3.2, 1 USB 3.2 Type-C, 6 COM

NEW

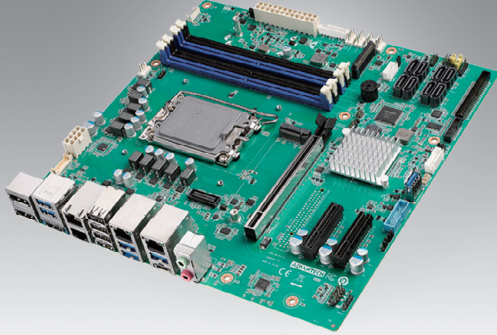

Specifications

Features


- Supports Intel® 12th Gen Core™ processors (Alder Lake-S) with Q670E/R680E/H610E chipset
- Supports up to 32GB DDR5 4400MT/S with four UDIMMs
- Four displays. (x2 DP++, HDMI, eDP)
- Intel AMT and Intel vPro Technology
- PCIe x16 slot Gen5, PCIe x4 slot Gen4, PCIe x4 slot Gen3
- Max up to x8 USB 3.2, x1 USB 3.2 Gen2 Type C, x4 USB 2.0, x8 SATAIII, x1 GbE LAN, x3 2.5GbE LANs, x1 M.2 M-Key
- Software VMD 0, 1, 5, 10, TPM 2.0
- WISE-DeviceOn and Embedded Software APIs

Software APIs:

Utilities:

	CPU	i9-12900E/ i9-12900TE	i7-12700E/ i7-12700TE	i5-12500E/ i5-12500TE	i3-12100E/ i3-12100TE	G7400E/ G7400TE	G6900E/ G6900TE	i9-12900	i7-12700	i5-12500	i5-12400	i3-12100	
Processor System	Core Number	16/16	12/12	6/6	4/4	2/2		16	12	6	6	4	
	Max. Speed	5.0GHz/ 4.8GHz	4.8GHz/ 4.7GHz	4.5GHz/ 4.3GHz	4.2GHz/ 4.0GHz	3.6GHz/ 3.0GHz	3.0GHz/ 2.4GHz	5.10GHz	4.9GHz	4.6GHz	4.4GHz	4.3GHz	
	Intel Smart Cache	30MB/30MB	25MB/25MB	18MB/18MB	12MB/12MB	6MB/6MB	4MB/4MB	30MB	25MB	18MB	18MB	12MB	
	TDP (W)	65W/35W	65W/35W	65W/35W	60W/35W	46W/35W	46W/35W	65W	65W	65W	65W	60W	
	Supports Model	AIMB-588Q, AIMB-588R, AIMB-588H											
	Chipset	Q670E/R680E/H610E											
Expansion Slot	BIOS	AMI BIOS UEFI 256 Mbits SPI											
	PCIe x16 (Gen5)	1 slot											
	PCIe x8 (Gen4)	(1 slot, optional)											
	PCIe x4 (Gen3)	1 slot											
	PCIe x4 (Gen4)	1 slot											
Memory	Technology	Dual Channel DDR5 up to 4400 MT/s, ECC memory supported by CPU with Chipset R680E											
	Max. Capacity	128GB (32 GB per DIMM)											
	Frequency	4400MT/s (2DPC - 1DIMM 1R&2R), 4000MT/s (2DPC - 2DIMM 1R), 3600MT/s (2DPC - 2DIMM 2R)											
	Socket	Four 288-pin DDR5 UDIMM sockets, Dual Channel, Two DIMMs per channel											
Graphics	Controller	Intel UHD Graphics 770 Supports DirectX12, OpenGL 4.5											
	HDMI	1, up to resolution 4096*2160@ 60Hz. Supports HDR											
	eDP	1, up to resolution 3840 x 2160 @ 60 Hz (Internal pin header)											
	Display Port	2, up to 4096 x 2304 @ 60Hz											
	Four Display	DP + DP + HDMI + eDP											
	Triple Display	DP + DP + HDMI, DP + DP + eDP, DP + HDMI + eDP											
Ethernet	Dual Display	DP + HDMI, DP + DP, DP + eDP, HDMI + eDP											
	Controller	LAN1: 1GbE Intel I219-LM (AIMB-588Q/AIMB-588R/AIMB-588H) LAN2: 2.5GbE Intel I225-LM (AIMB-588Q/AIMB-588R) LAN3: 2.5GbE Intel I225-LM (AIMB-588R) LAN4: 2.5GbE Intel I225-LM (AIMB-588R)											
	Connector	RJ45 x2 (588Q) / RJ45 x4 (588R) / RJ45 x1 (588H)											
SATA	Max Data Transfer Rate	600 MB/s Max. (SATA 3.0)											
	Q'ty	8 (AIMB-588Q); 8 (AIMB-588R), 4 (AIMB-588H)											
Rear I/O	Display Port	2											
	HDMI	1											
	Ethernet	2 (AIMB-588Q); 4 (AIMB-588R); 1 (AIMB-588H)											
	USB	AIMB-588Q: 5 USB 3.2 Gen2 type A; 1 USB3.2 Gen2 Type C; 4 USB 2.0 type A AIMB-588R: 5 USB 3.2 Gen2 type A; 1 USB 3.2 Gen2 Type C; 4 USB 2.0 type A AIMB-588H: 2 USB 3.2 Gen2 type A; 4 USB 2.0											
	Audio	2 (Mic-in/ Line-out)											
Internal Connector	USB 3.2	AIMB-588Q: 3 USB 3.2 Gen1 AIMB-588R: 3 USB 3.2 Gen1 AIMB-588H: 2 USB 3.2 Gen1											
	USB 2.0	0											
	Serial	6 (5 x RS-232, 1 x RS-232/422/485 with auto flow control)											
	SATA 3.0	8											
	Extended Display Port (eDP)	1											
	M.2 (M key)	1 2280 NVMe PCIe x4 (AIMB-588Q/AIMB-588R)											
Watchdog Timer	GPIO	8-bit GPIO											
	Output Interval	System reset Programmable 1 ~ 255 sec/min											
Power Requirements	Power On	+5 V	3.3 V	12 V	12V_8P	5 Vsb							
		19.6A	24.04A	19A	18.5A	2.5A							
Environment	Operating Temperature	0 ~ 60° C (14 ~ 158° F), depends on CPU speed and cooler solution					Non-Operating						
							-40 ~ 85° C (-40 ~ 185° F)						
Physical Characteristics	Dimensions	244 mm x 244 mm (9.6" x 9.6")											
Power	Input Mode	ATX input											

Block Diagram

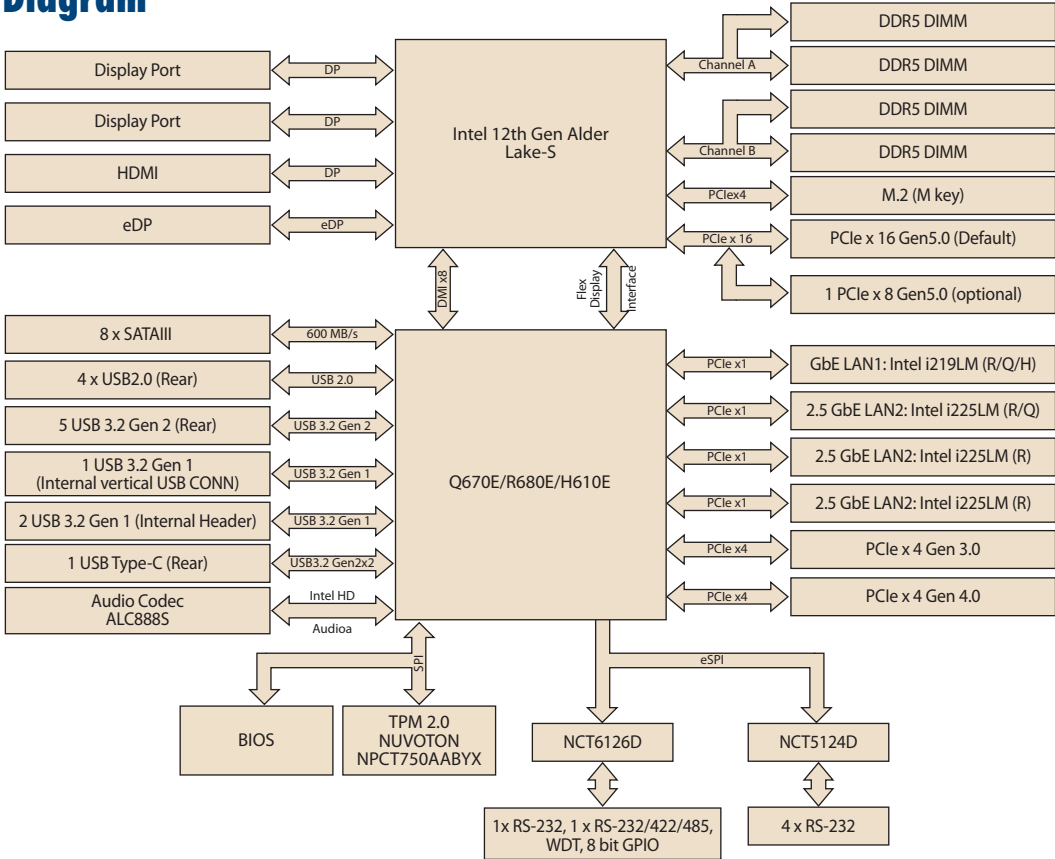

Ordering Information

P/N	Chipset	USB 3.2 Gen 2	USB 3.2 Gen 1	USB Typc-C Gen 2x2	USB 2.0	PCIe x16* Gen5	PCIe x8* Gen4	PCIe x4 Gen3	PCIe x4 Gen4	GbE LAN	2.5GbE LAN	DP	HDMI	eDP	SATA III	COM	M.2 M-key	TPM
AIMB-588Q-00A1	Q670E	4	4	1	4	1	0	1	1	1	1	2	1	1	8	6	1	1
AIMB-588R-00A1	R680E	5	3	1	4	1*	0 (1)*	1	1	1	3	2	1	1	8	6	1	1
AIMB-588H-00A1	H610E	2	2	0	4	1	0	1	0	1	0	2	1	1	4	6	0	1

(*) means BOM option
 * BOM option support: PCIe x8 Gen5 signals at PCIe16 slot and PCIe x8 Gen4 signals at PCIe8 slot

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1920002619T000	I/O port braket	1
1930001071	M.2 device screw	2

I/O View



Optional Accessories

Part Number	Description
1700020277-01	Dual port USB 3.0 cable 30cm with IO bracketDual port USB 2.0 cable 27cm with bracket
1700022363-01	1-to-1 serial port cable kit, 17cm
1700030647-01	1-to-1 serial port cable kit, 30cm
1700000447	1-to-4 serial ports cable kit, 45cm
1701400181	1-to-4 serial ports cable kit, 18cm
1970005349T000	LGA1700 CPU cooler for 2U chassis, for CPU TDP ≤ 65W, 78.0(W) x 78(L) x 55.4 (H)

Note: Purchasing AIMB-588's proprietary CPU cooler from Advantech is a must, other CPU cooler might be not compatible with AIMB-588. Note: screws P/N: 1933030500 for ACP-1010MB, 1930004607 for HPC-7120S


Embedded OS/API

OS/API	Part No.	Description
win10 IoT Ent	20706*****	img W10 XXXX

Reliable Embedded BIOS Solutions

Custom BIOS services with long-term support

Advantech's high-quality embedded BIOS solutions deliver rapid execution and feature expert BIOS team support. These solutions feature multi-functional designs that ensure security and enable power/boot management. Advantech further provides 10+ years of BIOS version management, internal management, and longevity support for both hardware and BIOS — enhancing application efficiency, diversifying functionality, and optimizing performance.

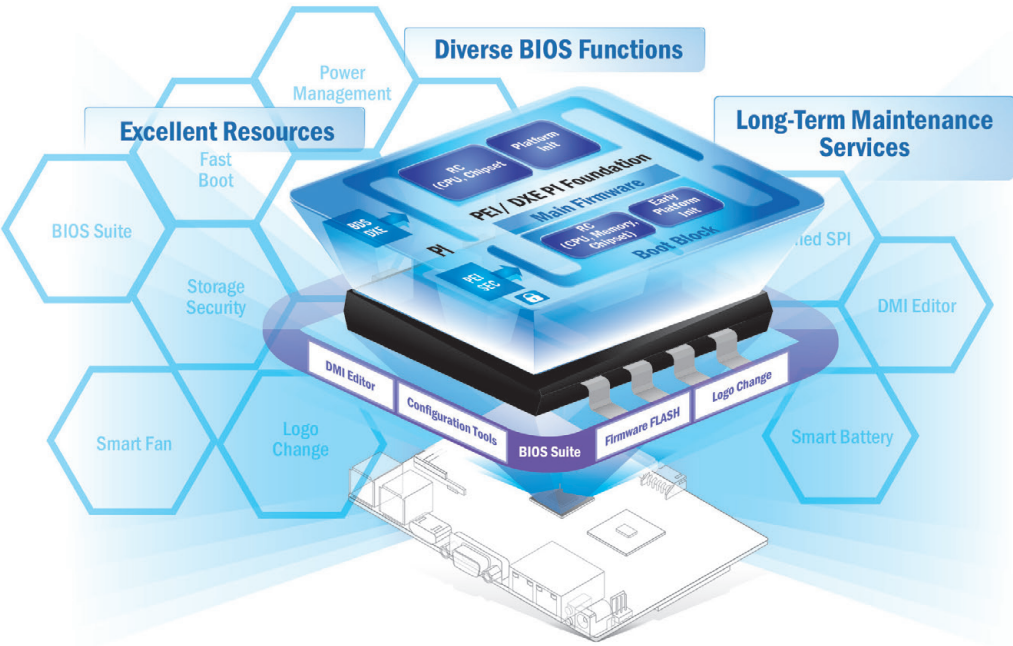

Embedded BIOS Solution Advantages

Sufficient Sources

- Strong partnership with BIOS vendors
- 50+ engineers with extensive industrial BIOS experience


Diverse BIOS Functions

- Multi-layer security
- 3 second fast boot
- Power management
- BIOS suite utility

Long-Term Maintenance Services

- Platform longevity support
- 10-year BIOS version control
- BIOS remote backup

Value-Added Customization Process

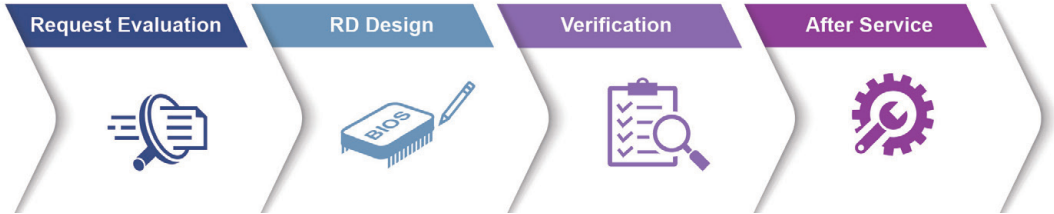

WISE-DeviceOn

Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



Features

Comprehensive Management	Remote Access	Efficient Operations
<ul style="list-style-type: none">• Devices status• Peripherals/firmware• Open for extension	<ul style="list-style-type: none">• Real-time monitoring• Remote controls• Troubleshooting	<ul style="list-style-type: none">• Zero-touch on-boarding• OTA updates• Batch control

Product Highlights

 <p>SOM-6883 High-performance 11th Gen Intel® COMe Type 6 Module</p>	 <p>MIO-5375 Compact 11th Gen Intel® Outdoor Focused 3.5" SBC</p>	 <p>EPC-B5587 10th Gen Intel® Xeon® based Edge server</p>	 <p>EPC-R3220 Arm based IoT Edge Gateway</p>
---	--	--	--

Edge AI Suite

AI development for diverse application at the Edge

Increasing demand for AI inference/analytic capabilities at the Edge make AI training models, software development environments, and hardware configuration key factors in successful solution deployment. Advantech's Edge AI Suite helps users build AI demo devices quickly and choose optimal hardware solutions easily.




5x Performance Boost	All-in-one Installation	One Click AI Experience	Plug-and-play Environment	Discover Cost-effective Hardware
<ul style="list-style-type: none">• Integrated Intel® OpenVINO™ technology• Boost AI using Advantech hardware	<ul style="list-style-type: none">• Build AI environment in under 5 minutes• Ready-to-use configuration	<ul style="list-style-type: none">• User friendly configuration guidance• One-click Benchmark acquisition	<ul style="list-style-type: none">• Easy access to 100+ AI inference extensions• Software development package available	<ul style="list-style-type: none">• Diverse CPU/RAM options• Find hardware solutions for AI development

Embedded Linux Support and Design-in Services

Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.

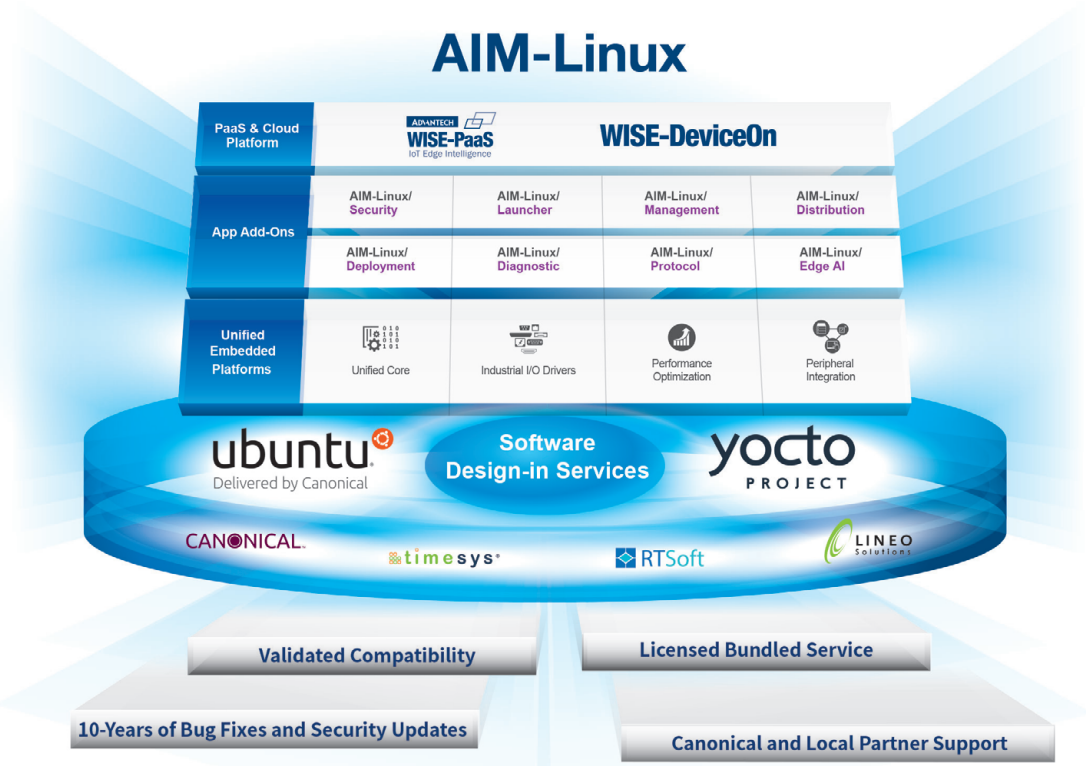

Features

<p>Certified OS and BSP</p> <ul style="list-style-type: none"> Platform compatibility tests Preloaded functional driver and software stacks 	<p>Licensed Services</p> <ul style="list-style-type: none"> License authorized Canonical delivers 10-years of bug fixes and security updates In-house bundled service 	<p>Numerous AI and Edge Resources</p> <ul style="list-style-type: none"> Containerized technology for service provision and deployment AI resources from Caffe, TensorFlow, and mxnet 	<p>Local Partner Alliance</p> <ul style="list-style-type: none"> Embedded Linux and Android Alliance (ELAA)
--	--	--	---

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecaq.de
Internet: www.fortecaq.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com